ELCO Lighting

2042 E. Vernon Ave.
Vernon, CA 90058
www.elcolighting.com
Form #0425_03.2026

2″, 3″and 4″
NEW IC Airtight Housings for 2-Hour Fire Rated Ceilings!

IC Rated for direct contact with insulation. Listed per UL514A. Maximum 2-Hour fire rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714. Can be used to meet Title 24 requirements.



2″



New Construction IC Airtight Housings for 2-Hour Fire Rated Ceilings

- COMPATIBLE WITH 2″ KOTO™

EL276JBICA 2″ Housing (4 ⅛″ H - 3″ O.D.)

3″




New Construction IC Airtight Housings for 2-Hour Fire Rated Ceilings

- COMPATIBLE WITH 3″ KOTO™ AND 3″ LED INSERTS

EL386JBICA 3″ Housing (4 ⅛″ H - 3 ⅝″ O.D)

4″

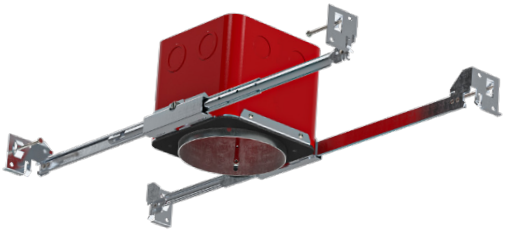

New Construction IC Airtight Housings for 2-Hour Fire Rated Ceilings

- COMPATIBLE WITH 4″ KOTO™ AND 4″ LED INSERTS

EJB483ICA 4″ Housing (4 ⅛″ H - 4 ⅛″ O.D)

4″



Concrete Pour Junction Box

- COMPATIBLE WITH 4″ KOTO™ AND 4″ LED INSERTS

EJB4CNC 4″ Housing (4 ″ H - 4″ O.D)
EJB4CNCCVR Optional Cover

For full selection of compatible trims visit ***Elcolighting.com***

Subject to US tariffs. All other standards, terms and conditions apply.
Please provide your e-mail address to salesadmin@elcolighting.com. To unsubscribe e-mail: salesadmin@elcolighting.com

Follow us on Instagram @elcolighting

E-mail your order to: **orderdesk@elcolighting.com**
Tel: **800.522.2626** • Fax: **800.644.2626**

ELCO Lighting
Innovation Beyond Expectation