Pathway Lighting

LED **Brick Lights** & LED **Step Lights**

Ibis Collection

Moa Collection

Trogon Collection

ELCO Lighting

The Best Choice in Lighting



Indoors or outdoors, lighting a stairway improves safety and adds an inviting glow to your space. LED step lights can be used to enhance your landscape, to amplify your deck lighting when entertaining, for commercial exterior lighting, or simply to feel more secure knowing your staircase is brightly lit.

Introducing ELCO's **Ibis**, **Trogon**, and **Moa Collections**

Ibis Collection

ELCO's Ibis Collection consists of diecast wet location mini LED Step Lights which are offered in 3000K or 4000K, 120V or 12V AC/DC in round or rectangle with an Angled Louver, Open Frame Lens or Scoop Faceplate in a sharp White, Black, Nickel or Copper powder coated finish.

Moa Collection

ELCO's Moa Collection consists of damp location standard and mini LED Step Lights with or without a photocell which are offered in 3000K, 120V or 12V AC with an Angled Louver or Acrylic lens in a sharp White, Black, Nickel or Bronze powder coated finish.

Trogon Collection

ELCO's Trogon Collection consists of diecast wet location LED Brick Lights which are offered in 5.4W-12W, 3000K, 120V with an Angled Louver, Open Frame Lens or Grill Faceplate in a sharp White, Black or Bronze powder coated finish.








Ibis Collection

Mini Diecast LED Step Lights

ELCO's Ibis Collection consists of diecast wet location mini LED Step Lights which are offered in 2W or 3W, 3000K or 4000K, 120V or 12V AC/DC in round or rectangle with an Angled Louver, Open Frame Lens or Scoop Faceplate in a sharp White, Black, Nickel or Copper powder coated finish.

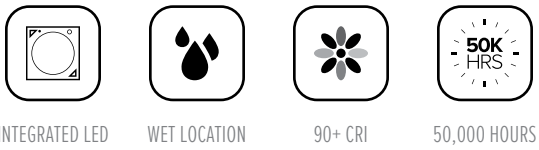


INTEGRATED LED | WET LOCATION | 90+ CRI | 50,000 HOURS





Mini LED Step Lights






LED Mini Step Light with Open Faceplate

- Single Piece Diecast aluminum faceplate
- Powder Coated Faceplate
- Vertical or Horizontal Mounting
- Integrated LED board and driver
- Diffused lens behind faceplate
- Wet Location listed for indoor or outdoor use
- Mounts in a standard single gang box
- Life span of 50,000 hours L70

Input Power	2W
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	12V or 120V
Wet Location	ETL Listed
Rated	IP 67






	White	Black	Nickel	Copper	Bronze
3000K / 2W / 12V	**ELST9130W**	**ELST9130B**	**ELST9130N**	**ELST9130CP**	**ELST9130BZ**
4000K / 2W / 12V	**ELST9140W**	**ELST9140B**	**ELST9140N**	**ELST9140CP**	**ELST9140BZ**
3000K / 2W / 120V	**ELST9530W**	**ELST9530B**	**ELST9530N**	**ELST9530CP**	**ELST9530BZ**
4000K / 2W / 120V	**ELST9540W**	**ELST9540B**	**ELST9540N**	**ELST9540CP**	**ELST9540BZ**



LED Mini Step Light with Angled Louver

- Single Piece Diecast aluminum faceplate
- Powder Coated Faceplate
- Vertical Mounting
- Integrated LED board and driver
- Diffused lens behind faceplate
- Wet Location listed for indoor or outdoor use
- Mounts in a standard single gang box
- Life span of 50,000 hours L70

Input Power	2W
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	12V or 120V
Wet Location	ETL Listed
Rated	IP 67





	White	Black	Nickel	Copper	Bronze
3000K / 2W / 12V	**ELST9230W**	**ELST9230B**	**ELST9230N**	**ELST9230CP**	**ELST9230BZ**
4000K / 2W / 12V	**ELST9240W**	**ELST9240B**	**ELST9240N**	**ELST9240CP**	**ELST9240BZ**
3000K / 2W / 120V	**ELST9630W**	**ELST9630B**	**ELST9630N**	**ELST9630CP**	**ELST9630BZ**
4000K / 2W / 120V	**ELST9640W**	**ELST9640B**	**ELST9640N**	**ELST9640CP**	**ELST9640BZ**

Mini LED Step Lights




LED Mini Step Light with Angled Louver

- Single Piece Diecast aluminum faceplate
- Powder Coated Faceplate
- Horizontal Mounting
- Integrated LED board and driver
- Diffused lens behind faceplate
- Wet Location listed for indoor or outdoor use
- Mounts in a standard single gang box
- Life span of 50,000 hours L70



	White	Black	Nickel	Copper	Bronze
3000K / 2W / 12V	**ELST9330W**	**ELST9330B**	**ELST9330N**	**ELST9330CP**	**ELST9330BZ**
4000K / 2W / 12V	**ELST9340W**	**ELST9340B**	**ELST9340N**	**ELST9340CP**	**ELST9340BZ**
3000K / 2W / 120V	**ELST9730W**	**ELST9730B**	**ELST9730N**	**ELST9730CP**	**ELST9730BZ**
4000K / 2W / 120V	**ELST9740W**	**ELST9740B**	**ELST9740N**	**ELST9740CP**	**ELST9740BZ**

Input Power	2W
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	12V or 120V
Wet Location	ETL Listed
Rated	IP 67






LED Mini Step Light with Scoop

- Single Piece Diecast aluminum faceplate
- Powder Coated Faceplate
- Vertical Mounting
- Integrated LED board and driver
- Diffused lens behind faceplate
- Wet Location listed for indoor or outdoor use
- Mounts in a standard single gang box
- Life span of 50,000 hours L70



	White	Black	Nickel	Copper	Bronze
3000K / 2W / 12V	**ELST9430W**	**ELST9430B**	**ELST9430N**	**ELST9430CP**	**ELST9430BZ**
4000K / 2W / 12V	**ELST9440W**	**ELST9440B**	**ELST9440N**	**ELST9440CP**	**ELST9440BZ**
3000K / 2W / 120V	**ELST9830W**	**ELST9830B**	**ELST9830N**	**ELST9830CP**	**ELST9830BZ**
4000K / 2W / 120V	**ELST9840W**	**ELST9840B**	**ELST9840N**	**ELST9840CP**	**ELST9840BZ**

Input Power	2W
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	12V or 120V
Wet Location	ETL Listed
Rated	IP 67



Round Mini LED Step Lights




Round LED Mini Step Light with Open Faceplate

- Single Piece Diecast aluminum faceplate
- Powder Coated Faceplate
- Integrated LED board and driver
- Diffused lens behind faceplate
- Wet Location listed for indoor or outdoor use
- Mounts in a round junction box
- Life span of 50,000 hours L70



	White	Black	Nickel	Copper	Bronze
3000K / 3W / 12V	**ELST8430W**	**ELST8430B**	**ELST8430N**	**ELST8430CP**	**ELST8430BZ**
4000K / 3W / 12V	**ELST8440W**	**ELST8440B**	**ELST8440N**	**ELST8440CP**	**ELST8440BZ**
3000K / 3W / 120V	**ELST8630W**	**ELST8630B**	**ELST8630N**	**ELST8630CP**	**ELST8630BZ**
4000K / 3W / 120V	**ELST8640W**	**ELST8640B**	**ELST8640N**	**ELST8640CP**	**ELST8640BZ**

Input Power	3W
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	12V or 120V
Wet Location	ETL Listed
Rated	IP 67






Round LED Mini Step Light with Angled Louver

- Single Piece Diecast aluminum faceplate
- Powder Coated Faceplate
- Integrated LED board and driver
- Diffused lens behind faceplate
- Wet Location listed for indoor or outdoor use
- Mounts in a round junction box
- Life span of 50,000 hours L70



	White	Black	Nickel	Copper	Bronze
3000K / 3W / 12V	**ELST8530W**	**ELST8530B**	**ELST8530N**	**ELST8530CP**	**ELST8530BZ**
4000K / 3W / 12V	**ELST8540W**	**ELST8540B**	**ELST8540N**	**ELST8540CP**	**ELST8540BZ**
3000K / 3W / 120V	**ELST8730W**	**ELST8730B**	**ELST8730N**	**ELST8730CP**	**ELST8730BZ**
4000K / 3W / 120V	**ELST8740W**	**ELST8740B**	**ELST8740N**	**ELST8740CP**	**ELST8740BZ**

Input Power	3W
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	12V or 120V
Wet Location	ETL Listed
Rated	IP 67



Moa Collection

LED Step Lights

ELCO's Moa Collection consists of damp or wet location standard and mini LED Step Lights with or without a photocell which are offered in 3000K, 120V or 12V AC with an Angled Louver or acrylic lens in a sharp White, Black, Nickel or Bronze powder coated finish.

INTEGRATED LED | WET LOCATION | 90+ CRI | DAMP LOCATION





Mini LED Step Lights






	White	Black	Bronze	Nickel
120V	**ELST64W**	**ELST64B**	**ELST64BZ**	**ELST64N**
12V	**ELST74W**	**ELST74B**	**ELST74BZ**	**ELST74N**

Mini LED Step Light with Angled Louver

- Vertical Mounting
- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- Mounts in a standard single gang box
- Life span of 35,000 hours L70

Input Power	0.8W
Color Temp.	3000K
CRI	90+
Input Volt	12V or 120V
Wet Location	UL listed








	White	Black	Bronze	Nickel
120V	**ELST65W**	**ELST65B**	**ELST65BZ**	**ELST65N**
12V	**ELST75W**	**ELST75B**	**ELST75BZ**	**ELST75N**

Mini LED Step Light with Angled Louver

- Horizontal Mounting
- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- Mounts in a standard single gang box
- Life span of 35,000 hours L70

Input Power	0.8W
Color Temp.	3000K
CRI	90+
Input Volt	12V or 120V
Wet Location	UL listed



Moa Collection

Mini LED Step Lights

Horizontal or Vertical






Mini LED Step Light with Frosted Acrylic Lens

- Vertical or Horizontal Mounting
- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- Mounts in a standard single gang box
- Life span of 35,000 hours L70

Input Power	0.8W
Color Temp.	3000K
CRI	90+
Input Volt	12V or 120V
Wet Location	UL listed






	White	Black	Bronze	Nickel
120V	**ELST66W**	**ELST66B**	**ELST66BZ**	**ELST66N**
12V	**ELST76W**	**ELST76B**	**ELST76BZ**	**ELST76N**



Mini Photocell LED Step Light with Angled Louver

- Energy saving photocell automatically turns unit on in the dark
- Vertical Mounting
- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- Mounts in a standard single gang box
- Life span of 35,000 hours L70

Input Power	0.75W
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed





White	Black	Bronze	Nickel
ELST67W	**ELST67B**	**ELST67BZ**	**ELST67N**

Mini LED Step Lights



Mini Photocell LED Step Light with Angled Louver

- Energy saving photocell automatically turns unit on in the dark
- Horizontal Mounting
- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- Mounts in a standard single gang box
- Life span of 35,000 hours L70



White

ELST68W



Black

ELST68B



Bronze


ELST68BZ



Nickel

ELST68N

Input Power	0.75W
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed



Vertical or Horizontal





Mini Photocell LED Step Light with Frosted Acrylic Lens

- Energy saving photocell automatically turns unit on in the dark
- Vertical or Horizontal Mounting
- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- Mounts in a standard single gang box
- Life span of 35,000 hours L70



White

ELST69W



Black

ELST69B



Bronze


ELST69BZ



Nickel

ELST69N

Input Power	0.75W
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed



Moa Collection

LED Step Lights





White

ELST20W



Black

ELST20B




Bronze


ELST20BZ

LED Step Light with Frosted Glass Lens

- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- UL Listed for direct contact with insulation
- Side brackets for mounting to wood
- Life span of 35,000 hours L70
- Includes hanger bar tabs (sold separately)

Input Power	2W
Color Temp.	3000K
CRI	90+
Input Volt	120V
Damp Location	UL listed



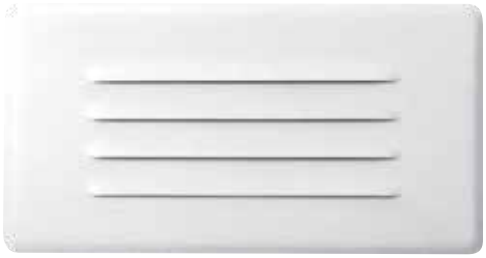



White

ELST21W



Black

ELST21B




Bronze

ELST21BZ

LED Step Light with Angled Louver

- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- UL Listed for direct contact with insulation
- Side brackets for mounting to wood
- Life span of 35,000 hours L70
- Includes hanger bar tabs (sold separately)

Input Power	2W
Color Temp.	3000K
CRI	90+
Input Volt	120V
Damp Location	UL listed



LED Step Lights



LED Step Light with Frosted Glass Lens

- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- UL Listed for direct contact with insulation
- Side brackets for mounting to wood
- Pre-wired junction box provided with ½" and ¾" knockout for through branch wiring
- Life span of 35,000 hours L70
- Includes hanger bar tabs (sold separately)



White

ELST22W



Black


ELST22B




Bronze

ELST22BZ

Input Power	2W
Color Temp.	3000K
CRI	90+
Input Volt	120V
Damp Location	UL listed



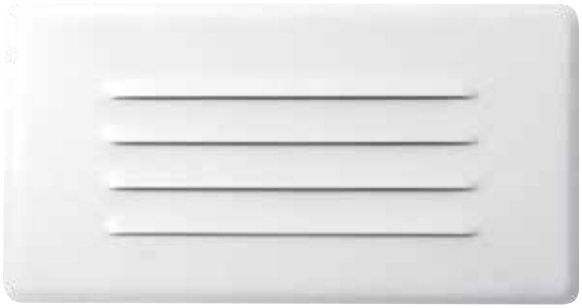

LED Step Light with Angled Louver

- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- UL Listed for direct contact with insulation
- Side brackets for mounting to wood
- Pre-wired junction box provided with ½" and ¾" knockout for through branch wiring
- Life span of 35,000 hours L70
- Includes hanger bar tabs (sold separately)



White

ELST23W



Black


ELST23B



Bronze

ELST23BZ

Input Power	2W
Color Temp.	3000K
CRI	90+
Input Volt	120V
Damp Location	UL listed



Trogon Collection


Diecast LED Brick Lights

ELCO's Trogon Collection consists of diecast wet location LED Brick Lights which are offered in 5.4W or 12W, 3000K, 120V with an Angled Louver, Open Frame Lens or Grill Faceplate in a sharp White, Black or Bronze powder coated finish.

INTEGRATED LED

WET LOCATION

90+ CRI

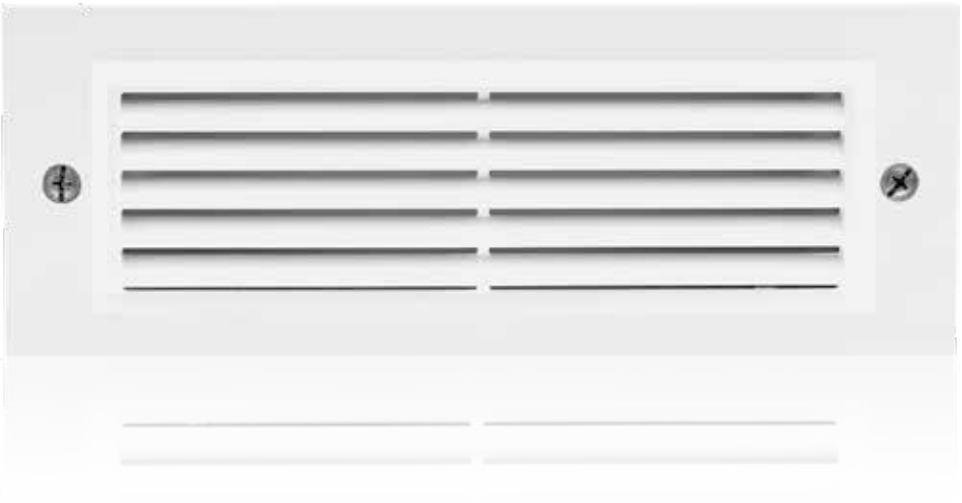



LED Brick Lights



LED Brick Light with Angled Louver

- Diecast aluminum housing and faceplate
- Integrated LED board and driver
- Diffused glass lens behind louver
- Wet Location listed for indoor or outdoor use
- UL Listed for poured concrete
- UL Listed for direct contact with insulation (type IC)
- Housing equipped with (2) side brackets and (2) ½" knockouts for easy wiring
- Life span of 35,000 hours L70



White

ELST81W



Black


ELST81B




Bronze

ELST81BZ

Input Power	5.4W
Lumens	340
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed



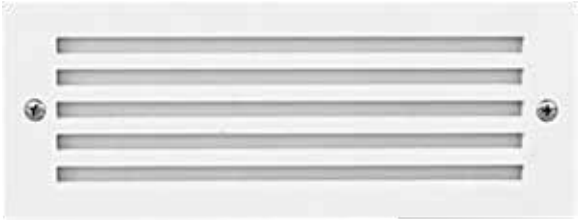

LED Brick Light with Grill Faceplate

- Diecast aluminum housing and faceplate
- Integrated LED board and driver
- Diffused glass lens behind grill
- Wet Location listed for indoor or outdoor use
- UL Listed for poured concrete
- UL Listed for direct contact with insulation (type IC)
- Housing equipped with (2) side brackets and (2) ½" knockouts for easy wiring
- Life span of 35,000 hours L70



White

ELST82W



Black


ELST82B




Bronze

ELST82BZ

Input Power	5.4W
Lumens	340
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed



LED Brick Lights

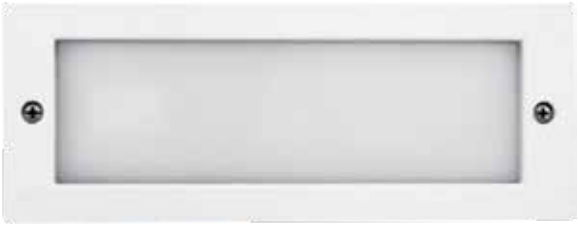

LED Brick Light with Open Faceplate

- Diecast aluminum housing and faceplate
- Integrated LED board and driver
- Diffused glass lens behind faceplate
- Wet Location listed for indoor or outdoor use
- UL Listed for poured concrete
- UL Listed for direct contact with insulation
- Housing equipped with (2) side brackets and (2) ½" knockouts for easy wiring
- Life span of 35,000 hours L70



White

ELST83W



Black


ELST83B





Bronze

ELST83BZ

Input Power	5.4W
Lumens	340
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed





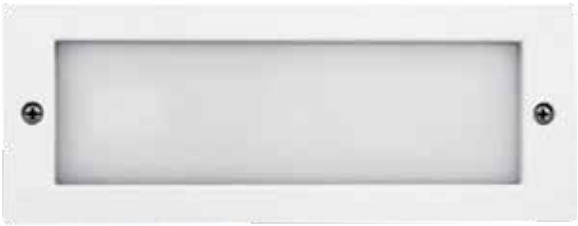

HIGHTECH

High Tech LED Brick Light with Open Faceplate

- Diecast aluminum housing and faceplate
- Integrated LED board and driver
- Diffused glass lens behind faceplate
- Wet Location listed for indoor or outdoor use
- UL Listed for poured concrete
- Housing equipped with (2) side brackets and (2) ½" knockouts for easy wiring
- Life span of 35,000 hours L70



White

ELST84W



Black


ELST84B




Bronze

ELST84BZ

Input Power	12W
Lumens	1000
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed





Accessories

Trogon Collection



Brick Grill Faceplate Replacement

PST1 W White
PST1 B Black
PST1 BZ Bronze



Brick Louver Faceplate Replacement

PST4 W White
PST4 B Black
PST4 BZ Bronze



Brick Open Faceplate Replacement

PST5 W White
PST5 B Black
PST5 BZ Bronze



Replacement Lens for Brick Lights

PST2L
Lens



LED Module Replacement

PST80
340 lm / 3000K / 5.4W
Includes driver

Moa Collection




Step Replacement Louver Faceplate

For ELST23
9½" x 5¾"

ELST12W White
ELST12B Black
ELST12BZ Bronze

For ELST21
9½" x 5"

ELST10W White
ELST10B Black
ELST10BZ Bronze



Step Replacement Open Faceplate

For ELST22
9½" x 5¾"

ELST13W White
ELST13B Black
ELST13BZ Bronze

For ELST20
9½" x 5"

ELST11W White
ELST11B Black
ELST11BZ Bronze



Hanger Bars (Set of 2)

HB24


Photometrics

Ibis Collection

Item: **ELST9540**
ISO FOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

Distance in Units of Mounting Height
Values Based On 1.5 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(+) = Maximum Candela Point


Footcandle Legend: .5 fc 1 fc 2 fc

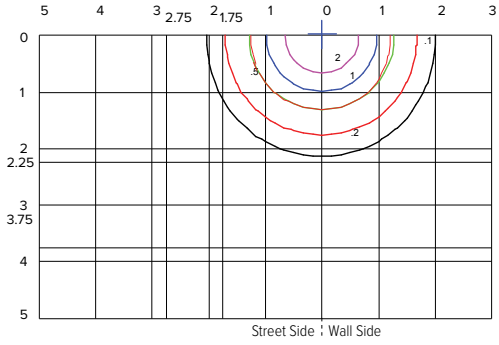

Item: **ELST9730**
ISO FOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

Distance in Units of Mounting Height
Values Based On 1.5 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(+) = Maximum Candela Point


Footcandle Legend: .5 fc 1 fc 2 fc

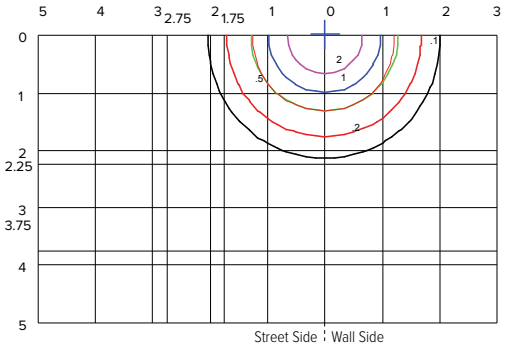

Item: **ELST9840**
ISO FOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

Distance in Units of Mounting Height
Values Based On 1.5 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(+) = Maximum Candela Point


Footcandle Legend: .5 fc 1 fc 2 fc

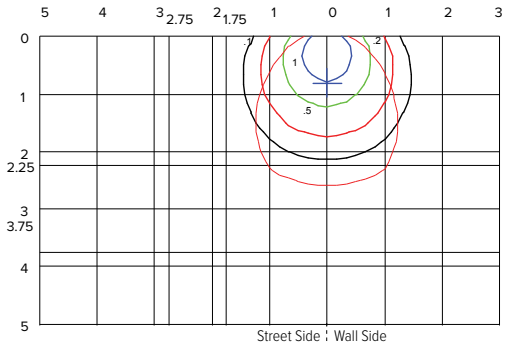

Item: **ELST8640**
ISO FOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

Distance in Units of Mounting Height
Values Based On 1.5 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(+) = Maximum Candela Point


Footcandle Legend: .5 fc 1 fc 2 fc

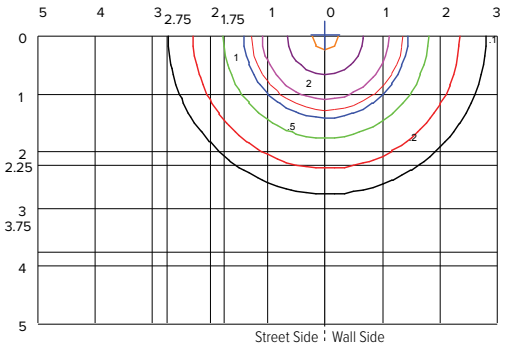

Item: **ELST8740**
ISO FOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

Distance in Units of Mounting Height
Values Based On 1.5 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(+) = Maximum Candela Point

Footcandle Legend: .5 fc 1 fc 2 fc

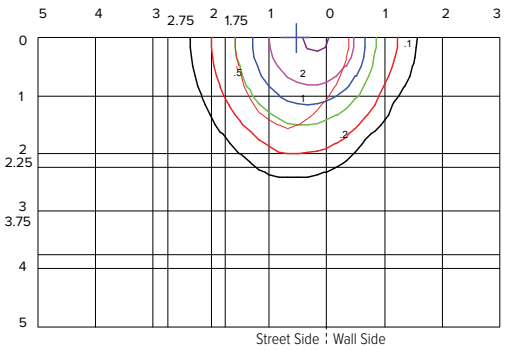



Over two and a half decades ago, in the heart of Los Angeles, ELCO Lighting was founded on the philosophy that high quality lighting products should be sold at a fair market price. Our commitment to this philosophy and dedication to exceptional customer service serve as the very soul of our company. We take pride in our perpetual commitment to such standards that enable us to continually prosper in a highly competitive and unpredictable industry.

With our expanding LED product line that entails recessed, track, undercabinet, outdoor and emergency lighting, we are ready to fulfill a variety of lighting demands. Quality engineering, fair market value, professional customer service, and micro-managed inventory are the cornerstones of ELCO Lighting.

ELCAT1046



ELCO Lighting

Customer Service

800.522.2626
customerservice@elcolighting.com
sales@elcolighting.com

Corporate Headquarters

2042 E. Vernon Ave.
Vernon, CA 90058
323.231.2600
elcolighting.com

Printed in the U.S.A.
$18.00

© ELCO Lighting. The marks appearing in this catalog are registered trademarks of ELCO Lighting. Other marks used herein are recognized trademarks of their respective companies.

Products shown in this brochure may be covered by U.S. and international patents. Specifications subject to change without notice.