

Master Product Guide

August **2026**

ELCO Lighting

Innovation Beyond Expectation

Who **We Are**

Founded in 1990 with a simple vision to make exceptional quality lighting at a fair market price. The last few decades have been a journey chasing that simple mission.



The Quality Choice

As a premiere luminaire manufacturer, with decades of lighting experience, we know what our customers want. That's why we use only the highest quality materials, and why we run our products through extensive tests before we add them to the ELCO family. When customers choose our lighting fixtures, they can rest assured they have chosen the best in functionality, design, performance, and quality.

The Timely Choice

Ordered today, shipped today. We at ELCO understand the importance of timing, so we send out almost all of our in-stock products the same day they are ordered. Our goal is to make timelines easier to hit and projects quicker to complete.

The Trusted Choice

With over 35 years in the lighting business, ELCO has become a trusted name throughout the country by doing the right thing. We stand behind every product we make. No exceptions. No excuses. It's a valuable trait that brings customers back again and again.

The Contractor's Choice

At ELCO, we design with the contractor in mind. Our packaging is easy to open, and our products are easy to install. This means a safe and orderly setup every time. Contractors feel confident choosing ELCO Lighting for their projects.

The Leading Choice

Both customers and competitors alike see ELCO as a leader in luminaire manufacturing. With many electrical engineers on site, we continue to be a pioneer in the world of illumination. Others may try to copy our designs, but they will never match our dedication to quality and service.

The Sustainable Choice

ELCO understands that lighting is a major contributor to energy consumption around the world. From the very beginning, we have engineered our products to be extremely efficient. With our LED product line, we strive to have a positive impact on energy use, one fixture at a time.

The Architect's Choice

We regularly talk with architects, and listen to their most pressing challenges. Not only do we go out of our way to save them time and money, we welcome their suggestions on how to improve our products. That's why architects specify ELCO for their projects.

Table **of Contents**

Recessed Lighting



The Koto™ Mini System	5
The Koto™ System	8
The Oak™ System	101
The Teak™ System	106
The Poplar™ System	111
The Alder™ System	118
LED Housings & Inserts	121
Specialty LED Retrofits	132
4" Housings for 2-Hour Fire Rated Ceilings	132
Fire Products & Emergency Battery Backups	132
Elm™ System	134
The Ply™ System	140
The Birch™ System	143
The Cedar™ System	147
The Laurel™ System	158
The Alpine™ System	166
Line Voltage	179
The Slant™ System	192

The Sylo™ Collection



Koto Sylo™ System	202
Ply Sylo™ System	232

Ceiling Mount Lighting



LED Sky™ Panels	236
Darby™ & Dustin™ LED Decorative Ceiling Lights	237

Track Lighting



Integrated LED Track Heads	239
Integrated LED Wall Wash Track Fixtures	242
MR16 Low Voltage Track Heads	243
MR16 GU10 Line Voltage Track Heads	246
120V Line Voltage Track Fixtures	247
Single & Two Circuit Track and Accessories	250
Pendant Lighting & Accessories	255

Undercabinet & Pucks Lighting



Lotus™ & Lotus II™ G2 LED Undercabinet	258
Zinnia™ LED Undercabinet Bar	259
Sage™ & Flax™ LED Undercabinet	260
Azalea™ & Ixia™ LED Undercabinet	261
12V Puck Light	262
24V DC Dimmers, 12V & 24V DC Drivers	263

Exit & Emergency Lighting



Exit Signs, Emergency Lights, & Accessories	265

LED Wallpacks, Floodlights, In-Ground, Brick & Step Lights



LED Wall Packs & Wall Mount	267
LED Floodlights & Accessories	268
Koto™ Landscape Bullet & In-Ground	270
In-Ground LED Lighting	277
Trogon™ LED Brick Lights & Accessories	278
Incandescent Brick Lights & Accessories	278
Mini Moa™ LED Step Lights	279
Ibis™ Diecast LED Step Lights	279
Incandescent Step Lights	282

The Ambio™ Collection



24V Indoor LED Tape Lights & Accessories	284
RGB Indoor LED Tape Lights & Accessories	288
24V Damp Location LED Tape Lights	288
Sectional LED Tape Lights & Accessories	289
Aluminum Channels for LED Tape Lights	290
24V DC Drivers	291
Duralights & Accessories	292
LED Flat Rope Lights & Accessories	293
Magnetic & Electronic Transformers	293

General Accessories & Overstock Sale




Lamps, Socket Adapters & General Accessories	295
Fire Rated Products	300
Adjustable and Trimless Hole Saws	301
Emergency Battery Backup & Accessories	303
ELCO Marketing Products	304




LED **Recessed** Lighting

The Koto™ Mini System	5
The Koto™ System	8
The Oak™ System	101
The Teak™ System	106
The Poplar™ System	111
The Alder™ System	118
LED Housings & Inserts	121
Specialty LED Retrofits	132
4″ Housings for 2-Hour Fire Rated Ceilings	132
Fire Products & Emergency Battery Backups	132
Elm™ System	134
The Birch™ System	143
The Cedar™ System	147
The Laurel™ System	158
The Alpine™ System	166
Line Voltage	179

Koto™ Mini 1,000 Lumen Downlight

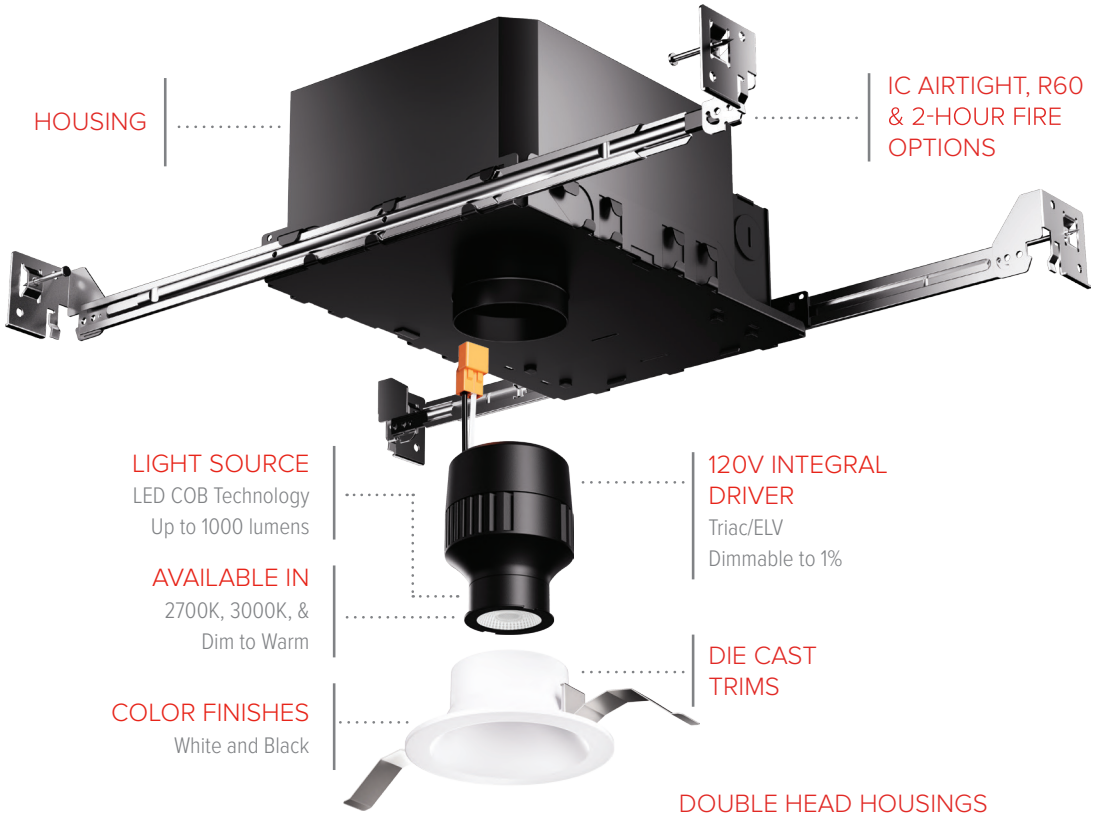

DOUBLE HEAD HOUSINGS

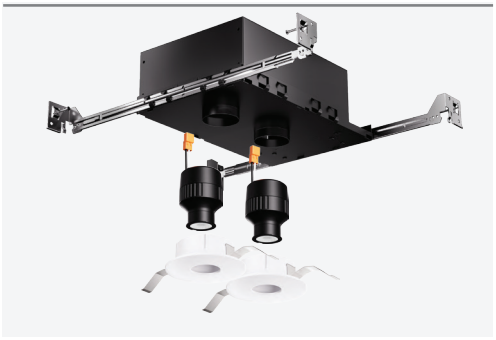



SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
1″ 1″	Round Reflector Square Reflector Round Pinhole Adjustable Square Pinhole Adjustable Round Adjustable	White Black	850 lm - 1000 lm	2700K & 3000K & Sunset Dim to Warm

Covered by U.S. PATENTS and Patents Pending

The Koto™ **System**


7/8″ Aperture Module with Twist-On Trims

TWIST-ON · INTEGRATED LED · IC RATED · 50,000 HOURS · DIMMABLE · 5 YEAR WARRANTY · 93+ CRI · TITLE 24 COMPLIANT · ACCESSIBLE FROM BELOW ~~ACCESS FROM ABOVE~~

Koto™ Mini LED Module, Housings, and Accessories

	Description	CAT. #	Specs
	**Koto™ Mini LED Module** ⅞″ Aperture EMN module works with all Koto™ Mini housings & trims. Dims to 1% Standard 35° Installed & 25° & 45° Lens Included Optional: Frosted Diffuser (L60), Hex Louver - White (L61), Black (L62)	EMN08SD	10W, 850 lm, Sunset
		EMN1027	10W, 1000 lm, 2700K
		EMN1030	10W, 1000 lm, 3000K
	**1″ Koto™ Mini** Single Head IC Airtight Housing	EMN175ICA	1″ Housing, 3 ½″ Height
	**1″ Koto™ Mini** Double Head IC Airtight Housing	EMN175DH2ICA	1″ Housing, 3 ½″ Height
	**1″ Koto™ Mini R60 & Chicago Plenum** Single Head IC Airtight Housing	EMN175AJICA	For R60 & Chicago Plenum Insulation 1″ Housing, 3 ½″ Height
	**1″ Koto™ Mini** Single Head Fire Rated Housing	EMN175JBICA	For 2-Hour Fire Rated Ceilings 1″ Housing, 4 ⅛″ Height

Accessories

	Description	CAT. #	Specs
	Frosted Diffuser	L60	For a softer light
	Field Changeable Secondary Optic Hex Louver	L61	White, for a better glare shield
		L62	Black, for a better glare shield

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Koto™ **System**

7/8″ Aperture Module with Twist-On Trims

TWIST-ON · INTEGRATED LED · IC RATED · 50,000 HOURS · DIMMABLE · 5 YEAR WARRANTY · 93+ CRI · TITLE 24 COMPLIANT

ACCESSIBLE FROM BELOW ~~ACCESS FROM ABOVE~~

1″ Diecast Trims for Koto™ Mini Module


	Description		CAT. #	Specs
	1″ Mini Round Downlight 2 ½″ O.D. - ⅞″ I.D.	WET LOCATION	EMN1RD18W	All White
			EMN1RD18BB	All Black
	1″ Mini Round Adjustable 2 ½″ O.D. - ⅞″ I.D. - 30˚ tilt	DAMP LOCATION	EMN1RD29W	All White
			EMN1RD29BB	All Black
	1″ Mini Round Pinhole Adjustable 2 ⅜″ O.D. - ⅞″ I.D. - 30˚ tilt	DAMP LOCATION	EMN1RD27W	All White
			EMN1RD27BB	All Black
	1″ Mini Square Downlight 2 ⅜″ Sq. - ⅞″ I.D.	WET LOCATION	EMN1SQ18W	All White
			EMN1SQ18BB	All Black
	1″ Mini Square Pinhole Adjustable 2 ⅜″ Sq. - ⅞″ I.D. - 30˚ tilt	DAMP LOCATION	EMN1SQ27W	All White
			EMN1SQ27BB	All Black

1″ Diecast Trimless for Koto™ Mini Module

	Description		CAT. #	Specs
	1″ Mini Round Trimless Downlight 1 ⅞″ O.D. - ⅞″ I.D.	DAMP LOCATION	EMN1RD18TLW	All White
			EMN1RD18TLBB	All Black
	1″ Mini Round Trimless Adjustable 1 ⅞″ O.D. - ⅞″ I.D. - 30˚ tilt	DAMP LOCATION	EMN1RD29TLW	All White
			EMN1RD29TLBB	All Black
	1″ Mini Round Trimless Pinhole Adjustable 1 ⅞″ O.D. - ⅞″ I.D. - 25˚ tilt	DAMP LOCATION	EMN1RD27TLW	All White
			EMN1RD27TLBB	All Black
	1″ Mini Round Spackle Frame 4 ⅜″ O.D. - 1 ⅞″ I.D.		EMN1RDSFR	For use with EMN1RD18TL, EMN1RD29TL and EMN1RD27TL

The **Koto™ System**

Koto™ Module & Twist-On Trims

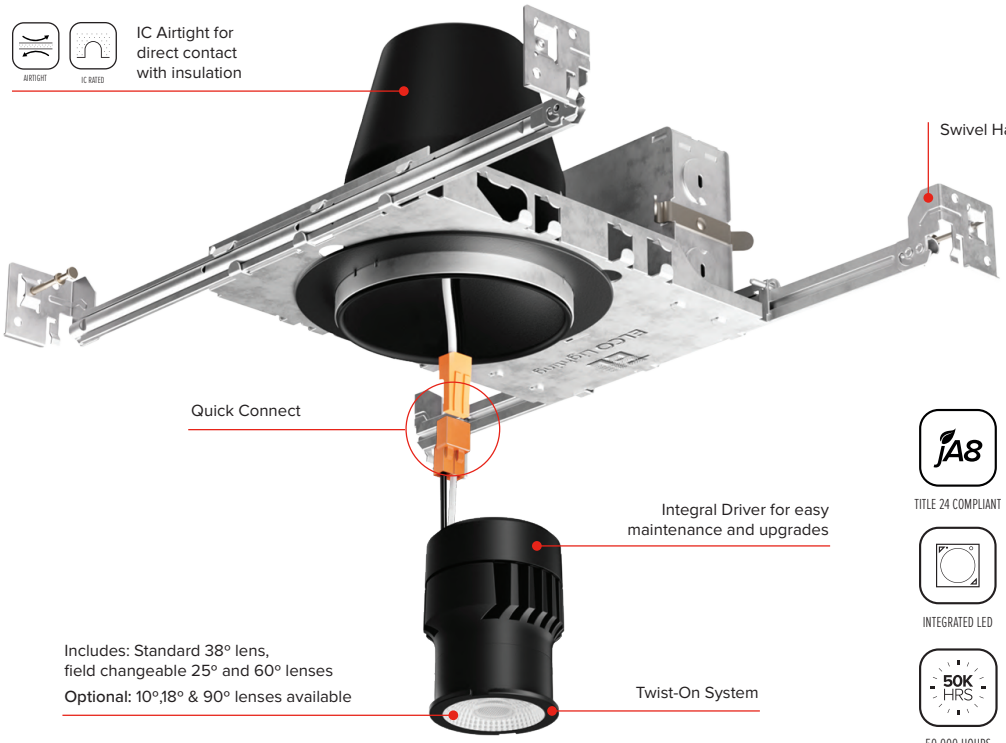



TITLE 24 COMPLIANT · DIMMABLE · INTEGRATED LED · WET LOCATION · 50,000 HOURS · 5 YEAR WARRANTY · 95+ CRI

Covered by U.S. PATENTS and Patents Pending

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
2″ 3″ 4″ 5″ 6″	**Round** (Reflector, Baffle, Adjustable, Pinhole, Slot Aperture, Wall Wash, & Trimless) **Square** (Reflector, Adjustable, Pinhole, Slot Aperture, Wall Wash, & Trimless)	All White All Black All Bronze Black White Ring Haze White Ring Chrome White Ring	350 lm to 1400 lm	2400K - 4000K, Sunset, Human Centric and 5-CCT

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

Standard Koto™ LED Modules

Description	CAT. #	Specs
Koto™ LED Module 1 ½ " Aperture - 2 ⅞" H Standard 38° Lens Installed, with field changeable 25° & 60° lenses included Optional Lenses: 18° (EP731C), 90° (EP739C) Optional: White Louver (L45) Black Louver (L57) Linear Lens (L46) Spread Lens (L47) Frosted Diffuser (L49) Single Asymmetric Lens (L54) Double Asymmetric Lens (L55) Color Shifter (L51)	ELK0327	5W, 350 lm, 2700K, 120V
	ELK0330	5W, 350 lm, 3000K, 120V
	ELK0724	10.5W, 730 lm, 2400K, 120V
	ELK0727	10.5W, 770 lm, 2700K, 120V
	ELK0730	10.5W, 800 lm, 3000K, 120V
	ELK0735	10.5W, 830 lm, 3500K, 120V
	ELK0740	10.5W, 860 lm, 4000K, 120V
	ELK0924	10.5W, 900 lm, 2400K, 120V
	ELK0927	10.5W, 940 lm, 2700K, 120V
	ELK0930	10.5W, 990 lm, 3000K, 120V
	ELK0935	10.5W, 1040 lm, 3500K, 120V
	ELK0940	10.5W, 1100 lm, 4000K, 120V
	ELK09SD	10.5W, 940 lm, Sunset, 120V
	ELK1124	12.5W, 1060 lm, 2400K, 120V
	ELK1127	12.5W, 1100 lm, 2700K, 120V
	ELK1130	12.5W, 1150 lm, 3000K, 120V
	ELK1135	12.5W, 1200 lm, 3500K, 120V
	ELK1140	12.5W, 1260 lm, 4000K, 120V
	ELK11HC	12.5W, 1050 lm, Human Centric, 120V
	ELK11SD	12.5W, 1050 lm, Sunset, 120V
	ELK1327	12.5W, 1250 lm, 2700K, 120V
	ELK1330	12.5W, 1300 lm, 3000K, 120V
	ELK1335	12.5W, 1350 lm, 3500K, 120V
	ELK1340	12.5W, 1400 lm, 4000K, 120V
10° Koto™ LED Module **(Narrow Spot)** Includes 10° lens installed, and field changeable 25° & 38° lens included.	ELK0327-NSP	5W, 350 lm, 2700K, 120V
	ELK0330-NSP	5W, 350 lm, 3000K, 120V
10° Koto™ LED Module **(Narrow Spot)** Includes 10° lens installed, and field changeable 25° & 38° lens included.	ELK0827-NSP	10.5W, 850 lm, 2700K, 120V
	ELK0830-NSP	10.5W, 850 lm, 3000K, 120V
Koto™ **5-CCT** LED Module Switch to desire Color Temperature: 2700K, 3000K, 3500K, 4000K, 5000K	ELK08CT5	10.5W, 825 lm, 120V, 2700K - 5000K
	ELK10CT5	12.5W, 1000 lm, 120V, 2700K - 5000K
Koto™ **FOCUS** LED Module 18° - 50° Adjustable Focus with a simple twist of the lens. Includes white snoot installed on module and field changeable black snoot.	ELK0727-FC	10.5W, 770 lm, 2700K, 120V
	ELK0730-FC	10.5W, 800 lm, 3000K, 120V
	ELK0735-FC	10.5W, 830 lm, 3500K, 120V
	ELK0740-FC	10.5W, 860 lm, 4000K, 120V
	ELK07SD-FC	10.5W, 720 lm, Sunset, 120V

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims





Standard Koto™ LED Housings

	Description	CAT. #	Specs
	Shallow Max. Adjustability IC Airtight New Construction Housing NEW! For shallow housing compatible trims look for this icon: (S)	EL250ICA	2" Housing. 3 ½" Height
		EL362ICA	3" Housing. 3 ½" Height
		EL453ICA	4" Housing. 3 ½" Height
	Max. Adjustability IC Airtight New Construction Housing	EL276ICA	2" Housing. 5 ½" Height
		EL386ICA	3" Housing. 5 ½" Height
		EL485ICA	4" Housing. 5 ½" Height
	Standard IC Airtight New Construction Housing	EL390ICA	3" Housing. 5 ½" Height
		EL390ICA-EM5	3" Housing, Emergency Battery Back-Up
		EL490ICA	4" Housing. 5 ½" Height
		EL490ICA-EM5	4" Housing, Emergency Battery Back-Up
	Standard IC Airtight New Construction Housing	EL570ICA	5" Housing. 7 ½" Height
		EL570ICA-EM5	5" Housing, Emergency Battery Back-Up
		EL770ICA	6" Housing. 7" Height
		EL770ICA-EM5	6" Housing, Emergency Battery Back-Up
	Shallow IC Airtight New Construction Housing For shallow housing compatible trims look for this icon: (S)	EL492ICA	4" Shallow Housing. 3 ½" Height Not Compatible with Trimless
	Shallow IC Airtight New Construction Housing For shallow housing compatible trims look for this icon: (S)	EL560ICA	5" Shallow Housing. 5 ½" Height
		EL760ICA	6" Shallow Housing. 5 ½" Height
		EL760ICA-EM5	6" Housing, Emergency Battery Back-Up
	Standard IC Airtight Remodel Housing	EL390RICA	3" Housing. 5 ½" Height
		EL490RICA	4" Housing. 5 ½" Height
	Standard IC Airtight Remodel Housing	EL570RICA	5" Housing. 7 ½" Height
		EL770RICA	6" Housing. 7 ½" Height
	Shallow IC Airtight Remodel Housing For shallow housing compatible trims look for this icon: (S)	EL492RICA	4" Shallow Housing. 3 ½" Height Not Compatible with Trimless
	Shallow IC Airtight Remodel Housing For shallow housing compatible trims look for this icon: (S)	EL560RICA	5" Shallow Housing. 5 ½" Height.
		EL760RICA	6" Shallow Housing. 5 ½" Height

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com




The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI · IC RATED · IN TODAY OUT TODAY · 50K HRS 50,000 HOURS · JA8 TITLE 24 COMPLIANT · DIMMABLE

Standard Koto™ LED Housings

	Description		CAT. #	Specs
	**R-60 Foam Insulation** Dedicated LED IC Airtight New Construction Housing For R-60 and Chicago Plenums		EL490AJICA	4" Housing. 5 ½" Height
			EL490AJICA-EM7	4" Housing, Emergency Battery Back-Up
	2-Hour Fire Rated ICA New Construction Housing (Sound Rated)	FIRE RATED	EL39FICA	3" Housing. 6 ⅞" Height
			EL48FICA	4" Housing. 6 ⅞" Height
			EL56FICA	5" Housing. 7 ¾" Height
			EL76FICA	6" Housing. 7 ¾" Height
	4" Shallow 2-Hour Fire Rated ICA New Construction Housing (Sound Rated) For shallow housing compatible trims look for this icon: Ⓢ	FIRE RATED	EL492FICAS	4" Shallow Housing. 4 ¾" Height
	6" Shallow 2-Hour Fire Rated ICA New Construction Housing (Sound Rated) For shallow housing compatible trims look for this icon: Ⓢ	FIRE RATED	EL75FICAS	6" Shallow Housing. 6 ¼" Height
	4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB COMPATIBLE FIRE RATED	EJB4ICA	4" Housing. 4 ½" Height Compatible Trims: ELK4116, ELK4127, ELK4129, ELK4188, ELK4710, ELK4713, ELK4715, ELK4216, ELK4229, ELK4227, ELK4714, ELK4716, ELK4172, ELK4216
			EJB4ICA-EM5	Housing with Emergency Battery Back-Up. 4 ½" Height
	A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714			
	4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB COMPATIBLE FIRE RATED	EJB4RICA	4" Housing. 4 ½" Height Compatible Trims: ELK4116, ELK4127, ELK4129, ELK4188, ELK4710, ELK4713, ELK4715, ELK4216, ELK4229, ELK4227, ELK4714, ELK4716, ELK4172, ELK4216
			EJB4RICA-EM5	Remodel Housing with Emergency Battery Back-Up. 4 ½" Height
	A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714			
	New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB COMPATIBLE FIRE RATED NEW!	EL276JBICA	2" Housing. 4" Height
			EL386JBICA	3" Housing. 4" Height
			EJB483ICA	4" Housing. 4" Height Compatible Trims: ELK4116, ELK4127, ELK4129, ELK4188, ELK4710, ELK4713, ELK4715, ELK4216, ELK4229, ELK4227, ELK4714, ELK4716, ELK4172, ELK4216

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

2" Pex™ Diecast Trims for Koto™ Module

	Description		CAT. #	Specs
	2" Round Deep Reflector 3 ½" O.D. - 2 ⅛" I.D.	WET LOCATION	ELK2818W	All White
			ELK2818BB	All Black
			ELK2818BZ	All Bronze
			ELK2818B	Black/White Ring
			ELK2818H	Haze/White Ring
	2" Round Adjustable Pinhole 3 ½" O.D. - 1 ½" I.D.- 30° tilt	DAMP LOCATION	ELK2827W	All White
			ELK2827BB	All Black
			ELK2827BZ	All Bronze
			ELK2827B	Black/White Ring
	2" Round Adjustable Reflector 3 ½" O.D. - 2 3⁄16" I.D. - 30° tilt	DAMP LOCATION	ELK2829W	All White
			ELK2829BB	All Black
			ELK2829BZ	All Bronze
			ELK2829B	Black/White Ring
			ELK2829H	Haze/White Ring
	2" Round Sleek Reflector 3 ½" O.D. - 2 ½" I.D.	WET LOCATION	ELK2863W	All White. Narrow Lip
			ELK2863BB	All Black. Narrow Lip
	2" Round Sleek Wall Wash Reflector NEW! 3 ½" O.D. - 1 ⅜" I.D.	WET LOCATION	ELK2883W	All White. Narrow Lip
			ELK2883BB	All Black. Narrow Lip
	2" Round Curved Reflector 3 ½" O.D. - 1 ½" I.D.	WET LOCATION	ELK2872W	All White
			ELK2872B	All Black
	2" Round Adjustable Gimbal 3 ½" O.D. - 1 ½" I.D. - 30° tilt	DAMP LOCATION	ELK2888W	All White
			ELK2888B	All Black
			ELK2888BZ	All Bronze
	2" Square Deep Reflector 3 ½" Sq. - 2 ⅛" I.D.	WET LOCATION	ELK2518W	All White
			ELK2518BB	All Black
			ELK2518B	Black/White Ring
	2" Square Adjustable Reflector 3 ½" Sq. - 2 3⁄16" I.D. - 30° tilt	DAMP LOCATION	ELK2529W	All White
			ELK2529BB	All Black
			ELK2529B	Black/White Ring
	2" Square Reflector 3 ½" Sq. - 1 ⅜" Sq.	WET LOCATION	ELK2541W	All White
			ELK2541BB	All Black
			ELK2541B	Black/White Ring
	2" Square Adjustable Pinhole 3 ½" Sq. - 1 ½" Sq. - 30° tilt	DAMP LOCATION	ELK2527W	All White
			ELK2527BB	All Black
			ELK2527B	Black/White Ring
	2" Square Gimbal 3 ½" Sq. - 1 ½" I.D. - 30° tilt	DAMP LOCATION	ELK2588W	All White
			ELK2588B	All Black
			ELK2588BZ	All Bronze

2" Pex™ Trimless for Koto™ Module

	Description		CAT. #	Specs
	2" Round Adjustable Trimless Reflector 2 ⅝" O.D.	DAMP LOCATION	ELK215W	White
			ELK215B	Black
	2" Round Trimless Spackle Frame 7" O.D. - 2 ½" I.D.		EL2SFR	For use with ELK215

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

3" Pex™ Diecast Trims for Koto™ Module

	Description		CAT. #	Specs
	3" Round Deep Reflector 4 ⅜" O.D. - 3" I.D.	WET LOCATION	ELK3618W	All White
			ELK3618BB	All Black
			ELK3618BZ	All Bronze
			ELK3618B	Black/White Ring
			ELK3618C	Chrome/White Ring
			ELK3618H	Haze/White Ring
	3" Round Adjustable Reflector 4 ⅜" O.D. - 3" I.D. - 15° - 30° tilt	(S) DAMP LOCATION	ELK3629W	All White
			ELK3629BB	All Black
			ELK3629BZ	All Bronze
			ELK3629B	Black/White Ring
			ELK3629C	Chrome/White Ring
			ELK3629H	Haze/White Ring
	3" Round Adjustable Pinhole 4 ⅜" O.D. - 1 ¾" I.D. - 15° - 30° tilt	(S) DAMP LOCATION	ELK3627W	All White
			ELK3627B	Black/White Ring
			ELK3627H	Haze/White Ring
			ELK3627BB	All Black
			ELK3627BZ	All Bronze
	3" Round Adjustable Slot Aperture 4 ⅜" O.D. - 45° tilt	DAMP LOCATION	ELK3620W	Black Slot/White Ring
	3" Round Adjustable Reflector Wall Wash 4 ⅜" O.D. - 3" I.D. - 45° tilt	DAMP LOCATION	ELK3622W	All White
	3" Round Sleek Regressed Eyeball 4 ⅜" O.D. - 2 ⅞" I.D. - 15° - 30° tilt	(S) WET LOCATION	ELK3653W	All White. Narrow Lip
			ELK3653BB	All Black. Narrow Lip
	3" Round Sleek Reflector 4 ⅜" O.D. - 3 ⅜" I.D.	WET LOCATION	ELK3663W	All White. Narrow Lip
			ELK3663BB	All Black. Narrow Lip
	3" Round Sleek Wall Wash Reflector 3 ½" O.D. - 1 ⅜" I.D.	NEW! WET LOCATION	ELK3683W	All White. Narrow Lip
			ELK3683BB	All Black. Narrow Lip
	3" Round Curved Reflector 4 ⅜" O.D. - 1 ½" I.D.	(S) WET LOCATION	ELK3672W	All White
			ELK3672B	All Black
	3" Round Directional Gimbal 4 ⅜" O.D. - 3" I.D. - 25° tilt	(S) DAMP LOCATION	ELK3679W	All White
			ELK3679B	Black/White Ring
			ELK3679H	Haze/White Ring
			ELK3679BB	All Black
	3" Round Adjustable Baffle 4 ⅜" O.D. - 3" I.D. - 35° tilt	DAMP LOCATION	ELK3693W	All White
	3" Square Deep Reflector 4 ⅜" Sq. - 3" I.D.	WET LOCATION	ELK3318W	All White
			ELK3318B	Black/White Ring
			ELK3318BB	All Black
			ELK3318BZ	All Bronze
			ELK3318C	Chrome/White Ring
			ELK3318H	Haze/White Ring
	3" Square Adjustable Reflector 4 ⅜" Sq. - 3" I.D. - 15° - 30° tilt	(S) DAMP LOCATION	ELK3329W	All White
			ELK3329BB	All Black
			ELK3329BZ	All Bronze
			ELK3329B	Black/White Ring
			ELK3329C	Chrome/White Ring
			ELK3329H	Haze/White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE


3" Pex™ Diecast Trims for Koto™ Module

	Description		CAT. #	Specs
	3" Square Adjustable Reflector Wall Wash 4 ⅜" Sq. - 3" I.D. - 35° tilt	DAMP LOCATION	ELK3322W	All White
	3" Square Adjustable Pinhole 4 ⅜" Sq. - 2" Sq. - 15° - 30° tilt	(S) DAMP LOCATION	ELK3327W	All White
			ELK3327B	Black/White Ring
			ELK3327H	Haze/White Ring
			ELK3327BB	All Black
			ELK3327BZ	All Bronze
	3" Square Reflector 4 ⅜" Sq. - 2" Sq.	(S) WET LOCATION	ELK3341W	All White
			ELK3341B	Black/White Ring
			ELK3341BB	All Black
			ELK3341BZ	All Bronze

3" Pex™ Flush Mount Trim Adapters for Koto™ Trims

	Description	CAT. #	Specs
	3" Round Flush Mount Spackle Frame 7 ⅛" O.D. - 4 ⅜" I.D.	EL3FMR	For 3" Pex Round Trims
	3" Square Flush Mount Spackle Frame 7 ⅛" Sq. - 4 ⅜" Sq.	EL3FMS	For 3" Pex Square Trims

3" Pex™ Trimless for Koto™ Module

	Description		CAT. #	Specs
	3" Round Trimless Reflector 3" O.D.	(S) WET LOCATION	ELK308W	White
			ELK308B	Black
			ELK308H	Haze
	3" Round Adjustable Trimless Reflector 3" O.D. - 35° tilt	(S) DAMP LOCATION	ELK315W	White
			ELK315B	Black
			ELK315H	Haze
	3" Round Trimless Spackle Frame 7" O.D. - 3" I.D.		EL3SFR	For use with ELK308 & ELK315
	3" Round Trimless Wood Ceiling Ring 3 ⅛" O.D.		EL3WCARD	For use with ELK308 & ELK315
	3" Round Knife Edge Wood Ceiling Trim with Mounting Clips 3 ⅞" O.D. - 3 ⅜" I.D.		EL3WCRW	White, for use with ELK308 & ELK315
			EL3WCRB	Black, for use with ELK308 & ELK315
	3" Square Trimless Reflector 2 9⁄16" Sq.	(S) WET LOCATION	ELK370W	White
			ELK370B	Black
			ELK370H	Haze
	3" Square Adjustable Trimless Reflector 2 9⁄16" Sq. - 35° tilt	(S) DAMP LOCATION	ELK381W	White
			ELK381B	Black
			ELK381H	Haze
	3" Square Trimless Spackle Frame 5 ⅞" Sq. - 2 ½" Sq.		EL03SFS	For use with ELK370 & ELK381

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ Module

	Description		CAT. #	Specs
	4" Round Shallow Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	ELK4116W	All White
			ELK4116H	Haze/White Ring
	4" Round Deep Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	ELK4118W	All White
			ELK4118BB	All Black
			ELK4118BZ	All Bronze
			ELK4118B	Black/White Ring
			ELK4118C	Chrome/White Ring
			ELK4118H	Haze/White Ring
	4" Round Adjustable Reflector 5" O.D. - 4" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4129W	All White
			ELK4129BB	All Black
			ELK4129BZ	All Bronze
			ELK4129B	Black/White Ring
			ELK4129C	Chrome/White Ring
			ELK4129H	Haze/White Ring
	4" Round Adjustable Reflector with Clear Glass Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	WET LOCATION	ELK4111W	All White
			ELK4111BB	All Black
			ELK4111BZ	All Bronze
			ELK4111B	Black/White Ring
			ELK4111C	Chrome/White Ring
			ELK4111H	Haze/White Ring
	4" Round Adjustable Reflector with Frosted Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	WET LOCATION	ELK4112W	All White
			ELK4112BB	All Black
			ELK4112BZ	All Bronze
			ELK4112B	Black/White Ring
			ELK4112C	Chrome/White Ring
			ELK4112H	Haze/White Ring
	4" Round Rotatable Slot Aperture 5" O.D. - 4" I.D. - 45° tilt	DAMP LOCATION	ELK4120W	Black Inside/White Ring
	4" Round Adjustable Wall Wash 5" O.D. - 3 ¾" I.D. - 45° tilt	DAMP LOCATION	ELK4122W	All White
	4" Round Adjustable Pinhole 5" O.D. - 2" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4127W	All White
			ELK4127BB	All Black
			ELK4127BZ	All Bronze
			ELK4127B	Black/White Ring
			ELK4127H	Haze/White Ring
	4" Round Adjustable Pinhole with Frosted Lens 5" O.D. - 2" I.D. - 25° - 35° tilt	WET LOCATION	ELK4125W	All White
			ELK4125BB	All Black
			ELK4125BZ	All Bronze
			ELK4125H	Haze/White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ Module

	Description	CAT. #	Specs
	4" Round Slot Aperture 5" O.D. - 2 ⅜" I.D. - 45° tilt DAMP LOCATION	ELK4130W	Black Inside/White Ring
	4" Round Sleek Regressed Eyeball (S) 5" O.D. - 3 ½" I.D. - 15° - 30° tilt WET LOCATION	ELK4153W	All White. Narrow Ring
		ELK4153BB	All Black. Narrow Ring
		ELK4153B	Black/White Ring. Narrow Ring
	4" Round Sleek Reflector 5" O.D. - 3 ⅞" I.D. WET LOCATION	ELK4163W	All White
		ELK4163BB	All Black
	4" Round Sleek Wall Wash Reflector 5" O.D. - 3 ½" I.D. WET LOCATION NEW!	ELK4183W	All White
		ELK4183BB	All Black
	4" Round Curved Reflector (S) 5" O.D. - 1 ½" I.D. WET LOCATION	ELK4172W	All White
		ELK4172B	All Black
	4" Round Directional Gimbal (S) 5" O.D. - 3 ½" I.D. - 25° tilt DAMP LOCATION	ELK4179W	All White
		ELK4179BB	All Black
		ELK4179B	Black/White Ring
		ELK4179H	Haze/White Ring
	4" Round Adjustable Spot (S) 5" O.D. - 3 ⅝" I.D. - 25° tilt DAMP LOCATION	ELK4188W	All White
		ELK4188BB	All Black
		ELK4188BZ	All Bronze
	4" Round Adjustable Baffle 5" O.D. - 4" I.D. - 35° tilt DAMP LOCATION	ELK4193W	All White
		ELK4193BB	All Black
		ELK4193B	Black/White Ring
	4" Square Shallow Reflector (S) 5" Sq. - 3 ⅝" I.D. WET LOCATION	ELK4216W	All White
		ELK4216H	Haze/White Ring
	4" Square Deep Reflector 5" Sq. - 3 ¾" I.D. WET LOCATION	ELK4218W	All White
		ELK4218B	Black/White Ring
		ELK4218BB	All Black
		ELK4218BZ	All Bronze
		ELK4218C	Chrome/White Ring
		ELK4218H	Haze/White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ Module

	Description		CAT. #	Specs
	4" Square Adjustable Reflector 5" Sq. - 3 5/8" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4229W	All White
			ELK4229BB	All Black
			ELK4229BZ	All Bronze
			ELK4229B	Black/White Ring
			ELK4229C	Chrome/White Ring
			ELK4229H	Haze/White Ring
	4" Square Adjustable Pinhole with Frosted Lens 5" Sq. - 2 ½" Sq. - 25° - 35° tilt	WET LOCATION	ELK4212W	All White
			ELK4212BB	All Black
			ELK4212BZ	All Bronze
			ELK4212B	Black/White Ring
	4" Square Adjustable Wall Wash 5" Sq. - 3 ¾" I.D. - 45° tilt	DAMP LOCATION	ELK4222W	White Ring
	4" Square Adjustable Pinhole 5" Sq. - 2 ½" Sq. - 25° - 35° tilt	DAMP LOCATION	ELK4227W	All White
			ELK4227BB	All Black
			ELK4227BZ	All Bronze
			ELK4227B	Black/White Ring
			ELK4227H	Haze/White Ring
	4" Square Adjustable Reflector 5" Sq. - 2 5/8" Sq. - 35° tilt	DAMP LOCATION	ELK4282W	All White
	4" Square Adjustable Baffle 5" Sq. - 3 5/8" Sq. - 35° tilt	DAMP LOCATION	ELK4284W	All White
			ELK4284B	All Black
			ELK4284BZ	All Bronze

4" Pex™ Flush Mount Trim Adapters for Koto™ Trims

	Description	CAT. #	Specs
	4" Round Flush Mount Spackle Frame 7 1/8" O.D. - 5" I.D.	EL4FMR	For ELK4116, ELK4118, ELK4127, ELK4129, ELK4710, ELK4713, ELK4715
	4" Square Flush Mount Spackle Frame 7 1/8" Sq. - 4 3/8" Sq.	EL4FMS	For ELK4216, ELK4218, ELK4227, ELK4229

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Trimless for Koto™ Module

	Description		CAT. #	Specs
	4" Round Non-Adjustable Trimless Reflector 4" O.D.	WET LOCATION	ELK408W ELK408B ELK408H ELK408BZ	White Black Haze Bronze
	4" Round Adjustable Trimless Reflector 4" O.D. - 35° tilt	DAMP LOCATION	ELK415W ELK415B ELK415H ELK415BZ	White Black Haze Bronze
	4" Round Trimless Spackle Frame 7 ⅛" O.D. - 4" I.D.		EL4SFR	For use with ELK408 and ELK415
	4" Round Trimless Wood Ceiling Ring 4" O.D.		EL4WCARD	For use with ELK408 & ELK415
	4" Spackle Frame with Trimless Adjustable Reflector	DAMP LOCATION	ELK430W ELK430B ELK430BZ	White Black Bronze
	4" Spackle Frame with Trimless Adjustable Baffle	DAMP LOCATION	ELK434W ELK434B ELK434BZ	White Black Bronze
	4" Square Trimless Reflector 3 ¼" Sq.	WET LOCATION	ELK445W ELK445B	White Black
	4" Square Adjustable Trimless Reflector 3 ¼" Sq.- 35° tilt	DAMP LOCATION	ELK459W ELK459B ELK459H	White Black Haze
	4" Square Trimless Spackle Frame 6 ¼" Sq. - 3 ⅛" Sq.		EL4SFS	For use with ELK445 and ELK459

4" Unique™ Trims for Koto™ Module

	Description		CAT. #	Specs
	4" Round Adjustable Reflector 5" O.D. - 3 ⅞" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4710W ELK4717W	All White. Shallow Compatible All White, Deep Reflector. Not Shallow Compatible
	4" Round Adjustable Baffle 5" O.D. - 3 ⅞" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4713W	All White
	4" Square Reflector 4 ½" Sq. - 2 ¾" Sq.	WET LOCATION	ELK4714W	All White
	4" Square Baffle 4 ⅝" Sq. - 2 ⅞" Sq.	WET LOCATION	ELK4716W	All White

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

4" Flexa™ Trims for Koto™ Module

Description		CAT. #	Specs
	4" Round Adjustable Reflector 5" O.D. - 3 ⅛" I.D. - 35° tilt DAMP LOCATION	ELK4721WW	All White
		ELK4721BB	All Black
		ELK4721BZBZ	All Bronze
		ELK4721BW	Black Ref./White Ring
	4" Round Baffle 5" O.D. - 3 ⅛" I.D. - 35° tilt DAMP LOCATION	ELK4723WW	All White
		ELK4723BB	All Black
		ELK4723BZBZ	All Bronze
		ELK4723BW	Black Baffle/White Ring
	4" Square Reflector 4 ¾" Sq. - 2 ⅜" Sq. WET LOCATION	ELK4741WW	All White
		ELK4741BB	All Black
		ELK4741BW	Black Ref./White Ring
		ELK4741HW	Haze Ref./White Ring
	4" Adjustable Square Reflector 4 ¾" Sq. - 2 ⅜" Sq. - 35° tilt DAMP LOCATION	ELK4759WW	All White
		ELK4759BB	All Black
		ELK4759BW	Black Ref./White Ring
		ELK4759HW	Haze Ref./White Ring

4" Pex™ Universal Sloped Ceiling Trims for Koto™ Module

Description		CAT. #	Specs
	4" Round Universal Sloped Ceiling Reflector 5" O.D. - 3 ⅝" I.D. DAMP LOCATION	ELK4357W	All White
		ELK4357BB	All Black
		ELK4357BZ	All Bronze
		ELK4357B	Black/White Ring
		ELK4357H	Haze/White Ring
	4" Round Universal Sloped Ceiling Reflector with Clear Glass 5" O.D. - 3 ⅝" I.D. WET LOCATION	ELK4347W	All White
		ELK4347BB	All Black
		ELK4347BZ	All Bronze
		ELK4347B	Black/White Ring
		ELK4347H	Haze/White Ring
	4" Round Universal Sloped Ceiling Reflector with Frosted Glass 5" O.D. - 3 ⅝" I.D. WET LOCATION	ELK4349W	All White
		ELK4349BB	All Black
		ELK4349BZ	All Bronze
		ELK4349B	Black/White Ring
		ELK4349H	Haze/White Ring

4" Pex™ Universal Sloped Ceiling Trims for use in EL470ICA and EL470RICA housings only with Standard Koto™ LED Module.
Designed for use in 2/12 (10°) to 12/12 (45°) sloped ceiling

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE


5" & 6" Pex™ Trims for Koto™ Module

	Description		CAT. #	Specs
	5" Round Reflector 6 ¼" O.D. - 3 ⅝" I.D.	DAMP LOCATION	ELK5421W	All White
	5" Round Baffle 5 ½" O.D. - 3 ⅝" I.D.	DAMP LOCATION	ELK5493W	All White
	6" Round Reflector 7 ½" O.D. - 6" I.D.	WET LOCATION	ELK6418W ELK6418BB ELK6418BZ ELK6418H	All White All Black All Bronze Haze Ref./White Ring
	6" Round Adjustable Reflector 7 ½" O.D. - 6" I.D. - 30° tilt	WET LOCATION	ELK6429W ELK6429BB ELK6429BZ ELK6429H	All White All Black All Bronze Haze Ref./White Ring
	6" Round Adjustable Pinhole Reflector 8" O.D. - 1 ¾" I.D. - 25° tilt	DAMP LOCATION	ELK6427W ELK6427B	All White Black Ref./White Ring
	6" Square Adjustable Reflector 6 ¾" Sq. - 4 ¼" Sq.	DAMP LOCATION	ELK6829W ELK6829BB ELK6829H	All White All Black Haze Ref./White Ring


Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

Koto™ DX Module & Twist-On Trims

120-277V, 0-10V/Triac/ELV Dimming to 1% or DALI-2 DT8 Dimming to 0.1%

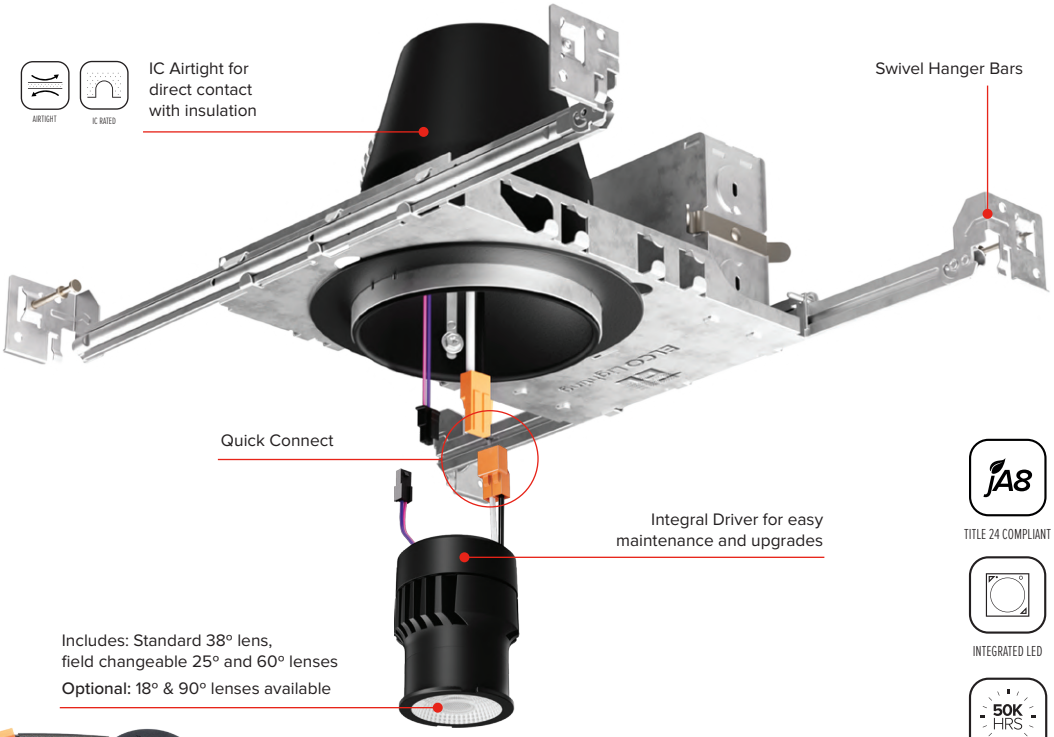



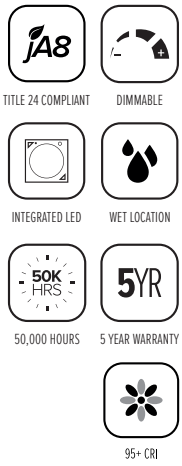

Covered by U.S. PATENTS and Patents Pending

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
2″ 3″ 4″ 6″	**Round** (Reflector, Baffle, Adjustable, Pinhole, Slot Aperture, Wall Wash, & Trimless) **Square** (Reflector, Adjustable, Pinhole, Slot Aperture, Wall Wash, & Trimless)	All White All Black All Bronze Black White Ring Haze White Ring Chrome White Ring	880 lm to 1000 lm	2700K - 4000K Sunset & Tunable White


The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

Koto™ DX LED Module & Housings




	Description	CAT. #	Specs
	**120/277V, 0-10V/Triac/ELV** Koto™ LED Module 1 ½ " Aperture - 3 ¼" H Standard 38° Lens Installed, with field changeable 25° & 60° lenses included Optional Lenses: 18° (EP731C), 90° (EP739C) TWIST-ON	ELK10DX27	11.8W, 1000 lm, 2700K, 120/277V
		ELK10DX30	11.8W, 1000 lm, 3000K, 120/277V
		ELK10DX35	11.8W, 1000 lm, 3500K, 120/277V
		ELK10DX40	11.8W, 1000 lm, 4000K, 120/277V
		ELK10DXSD	11.8W, 1000 lm, Sunset, 120/277V
		ELK08AL41TW	11.5W, 880 lm, Tunable White, 120/277V, DALI-2 DT8
	Shallow Max. Adjustability DX ICA New Construction Housing NEW! For shallow housing compatible trims look for this icon: (S)	EL250ICDXA	2" Housing. 3 ½" Height Not Compatible with Trimless
		EL362ICDXA	3" Housing. 3 ½" Height
		EL453ICDXA	4" Housing. 3 ½" Height
	Max. Adjustability DX IC Airtight New Construction Housing	EL276ICDXA	2" Housing. 5 ½" Height
		EL386ICDXA	3" Housing. 5 ½" Height
		EL485ICDXA	4" Housing. 5 ½" Height
	Standard DX IC Airtight New Construction Housing	EL390ICDXA	3" Housing. 5 ½" Height
		EL390ICDXA-EM5	3" Housing, Emergency Battery Back-Up
		EL490ICDXA	4" Housing. 5 ½" Height
		EL490ICDXA-EM5	4" Housing, Emergency Battery Back-Up
	Standard DX IC Airtight New Construction Housing	EL770ICDXA	6" Housing. 7 ½" Height
	Shallow DX IC Airtight New Construction Housing For shallow housing compatible trims look for this icon: (S)	EL760ICDXA	6" Shallow Housing. 5 ½" Height
	Standard DX IC Airtight Remodel Housing	EL390RICDXA	3" Housing. 5 ½" Height
		EL490RICDXA	4" Housing. 5 ½" Height
	Standard DX IC Airtight Remodel Housing	EL770RICDXA	6" Housing. 7 ½" Height
	Shallow DX IC Airtight Remodel Housing For shallow housing compatible trims look for this icon: (S)	EL760RICDXA	6" Shallow Housing. 5 ½" Height
	**R-60 Foam Insulation** Dedicated LED DX IC Airtight New Construction Housing For R-60 and Chicago Plenums	EL490AJICDXA	4" Housing. 5 ½" Height

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims

95+ CRI · IC RATED · IN TODAY OUT TODAY · 50K HRS 50,000 HOURS · JA8 TITLE 24 COMPLIANT · DIMMABLE

Koto™ DX Housings

	Description	CAT. #	Specs
	2-Hour Fire Rated DX IC Airtight Housing (Sound Rated) FIRE RATED	EL39FICDXA	3" Housing. 7 ¾" Height
		EL48FICDXA	4" Housing. 6 ¾" Height
		EL76FICDXA	6" Housing. 7 ¾" Height
	6" Shallow 2-Hour Fire Rated DX IC Airtight Housing (Sound Rated) For shallow housing compatible trims look for this icon: Ⓢ FIRE RATED	EL75FICDXAS	6" Shallow Housing. 6 ¼" Height
	4" New Construction DX IC Airtight Housing for 2-Hour Fire Rated Ceilings EJB COMPATIBLE FIRE RATED	EJB4ICDXA	4" Housing. 4 ½" Height Compatible Trims: ELK4116, ELK4127, ELK4129, ELK4188, ELK4710, ELK4713, ELK4715, ELK4216, ELK4229, ELK4227, ELK4714, ELK4716, ELK4172, ELK4216
A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714			
	4" Remodel DX IC Airtight Housing for 2-Hour Fire Rated Ceilings EJB COMPATIBLE FIRE RATED	EJB4RICDXA	4" Housing. 4 ½" Height Compatible Trims: ELK4116, ELK4127, ELK4129, ELK4188, ELK4710, ELK4713, ELK4715, ELK4216, ELK4229, ELK4227, ELK4714, ELK4716, ELK4172, ELK4216
A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714			
	New Construction DX IC Airtight Housing for 2-Hour Fire Rated Ceilings EJB COMPATIBLE FIRE RATED NEW!	EL276JBICDXA	2" Housing. 4" Height
		EL386JBICDXA	3" Housing. 4" Height
		EJB483ICDXA	4" Housing. 4" Height Compatible Trims: ELK4116, ELK4127, ELK4129, ELK4188, ELK4710, ELK4713, ELK4715, ELK4216, ELK4229, ELK4227, ELK4714, ELK4716, ELK4172, ELK4216

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

2" Pex™ Diecast Trims for Koto™ DX Module

	Description		CAT. #	Specs
	2" Round Deep Reflector 3 ½" O.D. - 2 ⅛" I.D.	WET LOCATION	ELK2818W	All White
			ELK2818BB	All Black
			ELK2818BZ	All Bronze
			ELK2818B	Black/White Ring
			ELK2818H	Haze/White Ring
	2" Round Adjustable Pinhole 3 ½" O.D. - 1 ½" I.D.	DAMP LOCATION	ELK2827W	All White
			ELK2827BB	All Black
			ELK2827BZ	All Bronze
			ELK2827B	Black/White Ring
	2" Round Adjustable Reflector 3 ½" O.D. - 2 3⁄16" I.D. - 30° tilt	DAMP LOCATION	ELK2829W	All White
			ELK2829BB	All Black
			ELK2829BZ	All Bronze
			ELK2829B	Black/White Ring
			ELK2829H	Haze/White Ring
	2" Round Sleek Reflector 3 ½" O.D. - 2 ½" I.D.	WET LOCATION	ELK2863W	All White
			ELK2863BB	All Black
	2" Round Sleek Wall Wash Reflector NEW! 3 ½" O.D. - 1 ⅜" I.D.	WET LOCATION	ELK2883W	All White
			ELK2883BB	All Black
	2" Round Curved Reflector 3 ½" O.D. - 1 ½" I.D.	WET LOCATION	ELK2872W	All White
			ELK2872B	All Black
	2" Round Adjustable Gimbal 3 ½" O.D. - 1 ½" I.D. - 30° tilt	DAMP LOCATION	ELK2888W	All White
			ELK2888B	All Black
			ELK2888BZ	All Bronze
	2" Square Deep Reflector 3 ½" Sq. - 2 ⅛" I.D.	WET LOCATION	ELK2518W	All White
			ELK2518BB	All Black
			ELK2518B	Black/White Ring
	2" Square Adjustable Reflector 3 ½" Sq. - 2 3⁄16" I.D. - 30° tilt	DAMP LOCATION	ELK2529W	All White
			ELK2529BB	All Black
			ELK2529B	Black/White Ring
	2" Square Reflector 3 ½" Sq. - 1 ⅜" Sq.	WET LOCATION	ELK2541W	All White
			ELK2541BB	All Black
			ELK2541B	Black/White Ring
	2" Square Adjustable Pinhole 3 ½" Sq. - 1 ½" Sq. - 30° tilt	DAMP LOCATION	ELK2527W	All White
			ELK2527BB	All Black
			ELK2527B	Black/White Ring
	2" Square Gimbal 3 ½" Sq. - 1 ½" I.D. - 30° tilt	DAMP LOCATION	ELK2588W	All White
			ELK2588B	All Black
			ELK2588BZ	All Bronze

2" Pex™ Trimless for Koto™ DX Module

	Description		CAT. #	Specs
	2" Round Adjustable Trimless Reflector 2 ⅝" O.D.	DAMP LOCATION	ELK215W	White
			ELK215B	Black
	2" Round Trimless Spackle Frame 7" O.D. - 2 ½" I.D.		EL2SFR	For use with ELK215

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

3" Pex™ Diecast Trims for Koto™ DX Module

	Description		CAT. #	Specs
	3" Round Deep Reflector 4 ⅜" O.D. - 3" I.D.	WET LOCATION	ELK3618W	All White
			ELK3618BB	All Black
			ELK3618BZ	All Bronze
			ELK3618B	Black/White Ring
			ELK3618C	Chrome/White Ring
			ELK3618H	Haze/White Ring
	3" Round Adjustable Reflector 4 ⅜" O.D. - 3" I.D. - 15° - 30° tilt	(S) DAMP LOCATION	ELK3629W	All White
			ELK3629BB	All Black
			ELK3629BZ	All Bronze
			ELK3629B	Black/White Ring
			ELK3629C	Chrome/White Ring
			ELK3629H	Haze/White Ring
	3" Round Adjustable Pinhole 4 ⅜" O.D. - 1 ¾" I.D. - 15° - 30° tilt	(S) DAMP LOCATION	ELK3627W	All White
			ELK3627B	Black/White Ring
			ELK3627H	Haze/White Ring
			ELK3627BB	All Black
			ELK3627BZ	All Bronze
	3" Round Adjustable Slot Aperture 4 ⅜" O.D. - 45° tilt	DAMP LOCATION	ELK3620W	Black Slot/White Ring
	3" Round Adjustable Reflector Wall Wash 4 ⅜" O.D. - 3" I.D. - 45° tilt	DAMP LOCATION	ELK3622W	All White
	3" Round Sleek Regressed Eyeball 4 ⅜" O.D. - 2 ⅞" I.D. - 15° - 30° tilt	(S) WET LOCATION	ELK3653W	All White
			ELK3653BB	All Black
	3" Round Sleek Reflector 4 ⅜" O.D. - 3 ⅜" I.D.	WET LOCATION	ELK3663W	All White
			ELK3663BB	All Black
	3" Round Sleek Wall Wash Reflector 3 ½" O.D. - 1 ⅜" I.D.	NEW! WET LOCATION	ELK3683W	All White
			ELK3683BB	All Black
	3" Round Curved Reflector 4 ⅜" O.D. - 1 ½" I.D.	(S) WET LOCATION	ELK3672W	All White
			ELK3672B	All Black
	3" Round Directional Gimbal 4 ⅜" O.D. - 3" I.D. - 25° tilt	(S) DAMP LOCATION	ELK3679W	All White
			ELK3679B	Black/White Ring
			ELK3679H	Haze/White Ring
			ELK3679BB	All Black
	3" Round Adjustable Baffle 4 ⅜" O.D. - 3" I.D. - 35° tilt	DAMP LOCATION	ELK3693W	All White
	3" Square Deep Reflector 4 ⅜" Sq. - 3" I.D.	WET LOCATION	ELK3318W	All White
			ELK3318B	Black/White Ring
			ELK3318BB	All Black
			ELK3318BZ	All Bronze
			ELK3318C	Chrome/White Ring
			ELK3318H	Haze/White Ring
	3" Square Adjustable Reflector 4 ⅜" Sq. - 3" I.D. - 15° - 30° tilt	(S) DAMP LOCATION	ELK3329W	All White
			ELK3329BB	All Black
			ELK3329BZ	All Bronze
			ELK3329B	Black/White Ring
			ELK3329C	Chrome/White Ring
			ELK3329H	Haze/White Ring

The Koto™ **System**

1 ½″ Aperture Module with Twist-On Trims




95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE


3″ Pex™ Diecast Trims for Koto™ DX Module

	Description		CAT. #	Specs
	3″ Square Adjustable Reflector Wall Wash 4 ⅜″ Sq. - 3″ I.D. - 35° tilt	DAMP LOCATION	ELK3322W	All White
	3″ Square Adjustable Pinhole 4 ⅜″ Sq. - 2″ Sq. - 15° - 30° tilt	S, DAMP LOCATION	ELK3327W ELK3327B ELK3327H ELK3327BB ELK3327BZ	All White Black/White Ring Haze/White Ring All Black All Bronze
	3″ Square Reflector 4 ⅜″ Sq. - 2″ Sq.	S, WET LOCATION	ELK3341W ELK3341B ELK3341BB ELK3341BZ	All White Black/White Ring All Black All Bronze
	3″ Square Adjustable Baffle 4 ⅜″ Sq. - 3″ I.D. - 35° tilt	DAMP LOCATION	ELK3393W	All White

3″ Pex™ Flush Mount Trim Adapters for Koto™ Trims

	Description	CAT. #	Specs
	3″ Round Flush Mount Spackle Frame 7 ⅛″ O.D. - 4 ⅜″ I.D.	EL3FMR	For 3″ Pex Round Trims
	3″ Square Flush Mount Spackle Frame 7 ⅛″ Sq. - 4 ⅜″ Sq.	EL3FMS	For 3″ Pex Square Trims

3″ Pex™ Trimless for Koto™ DX Module

	Description		CAT. #	Specs
	3″ Round Trimless Reflector 3″ O.D.	S, WET LOCATION	ELK308W ELK308B ELK308H	White Black Haze
	3″ Round Adjustable Trimless Reflector 3″ O.D. - 35° tilt	S, DAMP LOCATION	ELK315W ELK315B ELK315H	White Black Haze
	3″ Round Trimless Spackle Frame 7″ O.D. - 3″ I.D.		EL3SFR	For use with ELK308 & ELK315
	3″ Round Trimless Wood Ceiling Ring 3 ⅛″ O.D.		EL3WCARD	For use with ELK308 & ELK315
	3″ Round Knife Edge Wood Ceiling Trim with Mounting Clips 3 ⅞″ O.D. - 3 3⁄16″ I.D.		EL3WCRW EL3WCRB	White, for use with ELK308 & ELK315 Black, for use with ELK308 & ELK315
	3″ Square Trimless Reflector 2 3⁄16″ Sq.	S, WET LOCATION	ELK370W ELK370B ELK370H	White Black Haze
	3″ Square Adjustable Trimless Reflector 2 3⁄16″ Sq. - 35° tilt	S, DAMP LOCATION	ELK381W ELK381B ELK381H	White Black Haze
	3″ Square Trimless Spackle Frame 5 ⅞″ Sq. - 2 ½″ Sq.		EL03SFS	For use with ELK370 & ELK381

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ DX Module

	Description		CAT. #	Specs
	4" Round Shallow Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	ELK4116W	All White
			ELK4116H	Haze/White Ring
	4" Round Deep Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	ELK4118W	All White
			ELK4118BB	All Black
			ELK4118BZ	All Bronze
			ELK4118B	Black/White Ring
			ELK4118C	Chrome/White Ring
			ELK4118H	Haze/White Ring
	4" Round Adjustable Reflector 5" O.D. - 4" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4129W	All White
			ELK4129BB	All Black
			ELK4129BZ	All Bronze
			ELK4129B	Black/White Ring
			ELK4129C	Chrome/White Ring
			ELK4129H	Haze/White Ring
	4" Round Adjustable Reflector with Clear Glass Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	WET LOCATION	ELK4111W	All White
			ELK4111BB	All Black
			ELK4111BZ	All Bronze
			ELK4111B	Black/White Ring
			ELK4111C	Chrome/White Ring
			ELK4111H	Haze/White Ring
	4" Round Adjustable Reflector with Frosted Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	WET LOCATION	ELK4112W	All White
			ELK4112BB	All Black
			ELK4112BZ	All Bronze
			ELK4112B	Black/White Ring
			ELK4112C	Chrome/White Ring
			ELK4112H	Haze/White Ring
	4" Round Rotatable Slot Aperture 5" O.D. - 4" I.D. - 45° tilt	DAMP LOCATION	ELK4120W	Black Inside/White Ring
	4" Round Adjustable Wall Wash 5" O.D. - 3 ¾" I.D. - 45° tilt	DAMP LOCATION	ELK4122W	All White
	4" Round Adjustable Pinhole 5" O.D. - 2" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4127W	All White
			ELK4127BB	All Black
			ELK4127BZ	All Bronze
			ELK4127B	Black/White Ring
			ELK4127H	Haze/White Ring
	4" Round Adjustable Pinhole with Frosted Lens 5" O.D. - 2" I.D. - 25° - 35° tilt	WET LOCATION	ELK4125W	All White
			ELK4125BB	All Black
			ELK4125BZ	All Bronze
			ELK4125H	Haze/White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ DX Module

	Description		CAT. #	Specs
	4" Round Slot Aperture 5" O.D. - 2 ⅜" I.D. - 45° tilt	DAMP LOCATION	ELK4130W	Black Inside/White Ring
	4" Round Sleek Regressed Eyeball 5" O.D. - 3 ½" I.D. - 15° - 30° tilt	Ⓢ WET LOCATION	ELK4153W	All White
			ELK4153BB	All Black
			ELK4153B	Black/White Ring
	4" Round Sleek Reflector 5" O.D. - 3 ⅞" I.D.	WET LOCATION	ELK4163W	All White
			ELK4163BB	All Black
	4" Round Sleek Wall Wash Reflector 5" O.D. - 3 ½" I.D.	NEW! WET LOCATION	ELK4183W	All White
			ELK4183BB	All Black
	4" Round Curved Reflector 5" O.D. - 1 ½" I.D.	Ⓢ WET LOCATION	ELK4172W	All White
			ELK4172B	All Black
	4" Round Directional Gimbal 5" O.D. - 3 ½" I.D. - 25° tilt	Ⓢ DAMP LOCATION	ELK4179W	All White
			ELK4179BB	All Black
			ELK4179B	Black/White Ring
			ELK4179H	Haze/White Ring
	4" Round Adjustable Spot 5" O.D. - 3 ⅝" I.D. - 25° tilt	Ⓢ DAMP LOCATION	ELK4188W	All White
			ELK4188BB	All Black
			ELK4188BZ	All Bronze
	4" Round Adjustable Baffle 5" O.D. - 4" I.D. - 35° tilt	DAMP LOCATION	ELK4193W	All White
			ELK4193BB	All Black
			ELK4193B	Black/White Ring
	4" Square Shallow Reflector 5" Sq. - 3 ⅝" I.D.	Ⓢ WET LOCATION	ELK4216W	All White
			ELK4216H	Haze/White Ring
	4" Square Deep Reflector 5" Sq. - 3 ¾" I.D.	WET LOCATION	ELK4218W	All White
			ELK4218B	Black/White Ring
			ELK4218BB	All Black
			ELK4218BZ	All Bronze
			ELK4218C	Chrome/White Ring
			ELK4218H	Haze/White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ DX Module

	Description		CAT. #	Specs
	4" Square Adjustable Reflector 5" Sq. - 3 5/8" I.D. - 25° - 35° tilt	S DAMP LOCATION	ELK4229W	All White
			ELK4229BB	All Black
			ELK4229BZ	All Bronze
			ELK4229B	Black/White Ring
			ELK4229C	Chrome/White Ring
			ELK4229H	Haze/White Ring
	4" Square Adjustable Pinhole with Frosted Lens 5" Sq. - 2 ½" Sq. - 25° - 35° tilt	S WET LOCATION	ELK4212W	All White
			ELK4212BB	All Black
			ELK4212BZ	All Bronze
			ELK4212B	Black/White Ring
			ELK4212H	Haze/White Ring
	4" Square Adjustable Wall Wash 5" Sq. - 3 ¾" I.D. - 45° tilt	DAMP LOCATION	ELK4222W	White Ring
	4" Square Adjustable Pinhole 5" Sq. - 2 ½" Sq. - 25° - 35° tilt	S DAMP LOCATION	ELK4227W	All White
			ELK4227BB	All Black
			ELK4227BZ	All Bronze
			ELK4227B	Black/White Ring
			ELK4227H	Haze/White Ring
	4" Square Adjustable Reflector 5" Sq. - 2 5/8" Sq. - 35° tilt	DAMP LOCATION	ELK4282W	All White
	4" Square Adjustable Baffle 5" Sq. - 3 5/8" Sq. - 35° tilt	DAMP LOCATION	ELK4284W	All White
			ELK4284B	All Black
			ELK4284BZ	All Bronze

4" Pex™ Flush Mount Trim Adapters for Koto™ Trims

	Description	CAT. #	Specs
	4" Round Flush Mount Spackle Frame 7 1/8" O.D. - 5" I.D.	EL4FMR	For ELK4116, ELK4118, ELK4127, ELK4129, ELK4710, ELK4713, ELK4715
	4" Square Flush Mount Spackle Frame 7 1/8" Sq. - 4 3/8" Sq.	EL4FMS	For ELK4216, ELK4218, ELK4227, ELK4229

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Trimless for Koto™ DX Module

	Description		CAT. #	Specs
	4" Round Non-Adjustable Trimless Reflector 4" O.D.	DAMP LOCATION	ELK408W ELK408B ELK408H ELK408BZ	White Black Haze Bronze
	4" Round Adjustable Trimless Reflector 4" O.D. - 35° tilt	WET LOCATION	ELK415W ELK415B ELK415H ELK415BZ	White Black Haze Bronze
	4" Round Trimless Spackle Frame 7 ⅛" O.D. - 4" I.D.		EL4SFR	For use with ELK408 and ELK415
	4" Round Trimless Wood Ceiling Ring 4" O.D.		EL4WCARD	For use with ELK408 & ELK415
	4" Spackle Frame with Trimless Adjustable Reflector	DAMP LOCATION	ELK430W ELK430B ELK430BZ	White Black Bronze
	4" Spackle Frame with Trimless Adjustable Baffle	DAMP LOCATION	ELK434W ELK434B ELK434BZ	White Black Bronze
	4" Square Trimless Reflector 3 ¼" Sq.	WET LOCATION	ELK445W ELK445B	White Black
	4" Square Adjustable Trimless Reflector 3 ¼" Sq.- 35° tilt	DAMP LOCATION	ELK459W ELK459B ELK459H	White Black Haze
	4" Square Trimless Spackle Frame 6 ¼" Sq. - 3 ⅛" Sq.		EL4SFS	For use with ELK445 and ELK459

4" Unique™ Trims for Koto™ DX Module

	Description		CAT. #	Specs
	4" Round Adjustable Reflector 5" O.D. - 3 ⅞" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4710W	All White. Shallow Compatible
			ELK4717W	All White, Deep Reflector. Not Shallow Compatible
	4" Round Adjustable Baffle 5" O.D. - 3 ⅞" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4713W	All White
	4" Square Reflector 4 ½" Sq. - 2 ¾" Sq.	WET LOCATION	ELK4714W	All White
	4" Square Baffle 4 ⅝" Sq. - 2 ⅞" Sq.	WET LOCATION	ELK4716W	All White

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Flexa™ Trims for Koto™ DX Module


	Description		CAT. #	Specs
	4" Round Adjustable Reflector 5" O.D. - 3 ⅛" I.D. - 35° tilt	DAMP LOCATION	ELK4721WW	All White
			ELK4721BB	All Black
			ELK4721BZBZ	All Bronze
			ELK4721BW	Black Ref./White Ring
			ELK4721CW	Chrome Ref./White Ring
			ELK4721HW	Haze Ref./White Ring
	4" Square Reflector 4 ¾" Sq. - 2 ⅜" Sq.	WET LOCATION	ELK4741WW	All White
			ELK4741BB	All Black
			ELK4741BZBZ	All Bronze
			ELK4741BW	Black Ref./White Ring
			ELK4741HW	Haze Ref./White Ring
	4" Round Baffle 5" O.D. - 3 ⅛" I.D. - 35° tilt	DAMP LOCATION	ELK4723WW	All White
			ELK4723BB	All Black
			ELK4723BZBZ	All Bronze
			ELK4723BW	Black Baffle/White Ring
	4" Adjustable Square Reflector 4 ¾" Sq. - 2 ⅜" Sq. - 35° tilt	DAMP LOCATION	ELK4759WW	All White
			ELK4759BB	All Black
			ELK4759BW	Black Ref./White Ring
			ELK4759HW	Haze Ref./White Ring

6" Pex™ Trims for Koto™ DX Module


	Description		CAT. #	Specs
	6" Round Reflector 7 ½" O.D. - 6" I.D.	Ⓢ WET LOCATION	ELK6418W	All White
			ELK6418BB	All Black
			ELK6418BZ	All Bronze
			ELK6418H	Haze Ref./White Ring
	6" Round Adjustable Reflector 7 ½" O.D. - 6" I.D. - 30° tilt	Ⓢ WET LOCATION	ELK6429W	All White
			ELK6429BB	All Black
			ELK6429BZ	All Bronze
			ELK6429H	Haze Ref./White Ring
	6" Round Adjustable Pinhole Reflector 8" O.D. - 1 ¾" I.D. - 25° tilt	Ⓢ DAMP LOCATION	ELK6427W	All White
			ELK6427B	Black Ref./White Ring
			ELK6427H	Haze Ref./White Ring
	6" Square Adjustable Reflector 6 ¾" Sq. - 4 ¼" Sq.	Ⓢ DAMP LOCATION	ELK6829W	All White
			ELK6829BB	All Black
			ELK6829H	Haze Ref./White Ring

The **Koto™ System**

Koto™ Architectural Module & Twist-On Trims

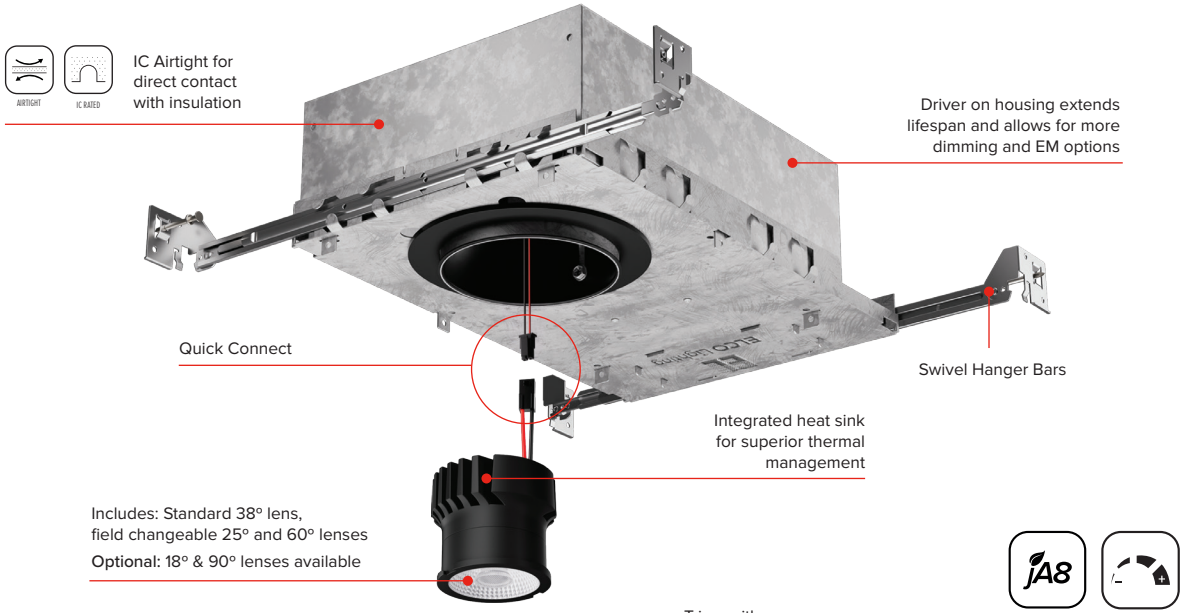



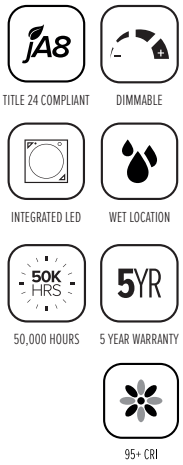

Covered by U.S. PATENTS and Patents Pending

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
2″ 3″ 4″ 5″ 6″	**Round** (Reflector, Baffle, Adjustable, Pinhole, Slot Aperture, Wall Wash, & Trimless) **Square** (Reflector, Adjustable, Pinhole, Slot Aperture, Wall Wash, & Trimless)	All White All Black All Bronze Black White Ring Haze White Ring Chrome White Ring	750 lm to 1950 lm	2700K - 4000K & Sunset

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

Koto™ Architectural LED Modules & Housings

Description	CAT. #	Specs
 Architectural Construction Koto™ LED Light Engine 1 ½ " Aperture - 2 ⅜" H Standard 38° Lens Installed, with field changeable 25° & 60° lenses included Optional Lenses: 18° (EP731C), 90° (EP739C) Optional: Louver (L45), Linear Lens (L46), Spread Lens (L47), Frosted Diffuser (L49) TWIST-ON	ELK1927D	970 lm MAX., 2700K
	ELK1930D	1000 lm MAX., 3000K
	ELK1935D	1030 lm MAX., 3500K
	ELK1940D	1050 lm MAX., 4000K
	ELK19SD	940 lm MAX., Sunset
	ELK19AMD	1000 lm MAX., Turtle Friendly Amber
	ELK2127D	1360 lm MAX., 2700K
	ELK2130D	1430 lm MAX., 3000K
	ELK2135D	1510 lm MAX., 3500K
	ELK2140D	1690 lm MAX., 4000K
	ELK2427D	1720 lm MAX., 2700K
	ELK2430D	1800 lm MAX., 3000K
	ELK2435D	1875 lm MAX., 3500K
	ELK2440D	1950 lm MAX., 4000K
 Architectural Construction Koto™ **FOCUS** LED Module 18° - 50° Adjustable Focus with a simple twist of the lens Includes white snoot installed on module and field changeable black snoot. TWIST-ON	ELK2127D-FC	1360 lm MAX., 2700K
	ELK2130D-FC	1430 lm MAX., 3000K
	ELK2135D-FC	1510 lm MAX., 3500K
	ELK2140D-FC	1690 lm MAX., 4000K

Compatible Architectural Housings Lumen Output (Per Module)					
Koto ™ Architectural LED Module	**Standard New Construction & Remodel Housings (12.5W)** E3LK6 Series E4LK8 Series	**2-Hr Fire Rated Housings (12.5W)** ELK7 Series ELK9 Series	**Shallow Housings (14.7W)** E2LK3 Series E3LK7 Series E4LK9 Series **Standard Housing (14.7W)** E6LK3 Series*	**High Lumen Housings (16.8W)** E2LK4 Series E3LK5 Series E4LK4 Series E6LK4 Series	**High Lumen Housings (18.9W)** E2LK9 Series E3LK8 Series E4LK7 Series E6LK5 Series
Architectural Koto™ LED Module - Nominal Delivered Lumens					
ELK19 Series	850 lm	850 lm	1000 lm	Not Compatible	Not Compatible
ELK21 Series	1100 lm	1100 lm	1300 lm	1400 lm	1650 lm
ELK24 Series	1350 lm	1350 lm	1500 m	1650 lm	1850 lm
Architectural Koto™ FOCUS LED Module					
ELK21XXD-FC Series	850 lm	850 lm	1000 lm	Not Compatible	Not Compatible

* For ELK21 & ELK24 Series Only


The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

Koto™ **Architectural** Housings

	Description	CAT. #	Specs
	Shallow Max. Adjustability New Construction ICA Housing 3 ½" Height For shallow housing compatible trims look for this icon: Ⓢ	E2LK34ICA	2" Housing, 14.7W, 120V, Triac/ELV
		E2LK35ICAD	2" Housing, 14.7W, 120/277V, 0-10V/Triac/ELV
		E3LK76ICA	3" Housing, 14.7W, 120V, Triac/ELV
		E3LK77ICAD	3" Housing, 14.7W, 120/277V, 0-10V/Triac/ELV
		E4LK98ICA	4" Housing, 14.7W, 120V, Triac/ELV
		E4LK99ICAD	4" Housing, 14.7W, 120/277V, 0-10V/Triac/ELV
	High Lumen Max. Adjustability New Construction ICA Housing For use with ELK21 & ELK24 Series Module 5 ½" Height	E2LK41ICA	2" Housing, 16.8W, 120V, Triac/ELV
		E2LK42ICAD	2" Housing, 16.8W, 120/277V, 0-10V/Triac/ELV
		E2LK94ICA	2" Housing, 18.9W, 120V, Triac/ELV
		E2LK95ICAD	2" Housing, 18.9W, 120/277V, 0-10V/Triac/ELV
		E3LK53ICA	3" Housing, 16.8W, 120V, Triac/ELV
		E3LK54ICAD	3" Housing, 16.8W, 120/277V, 0-10V/Triac/ELV
		E3LK84ICA	3" Housing, 18.9W, 120V, Triac/ELV
		E3LK85ICAD	3" Housing, 18.9W, 120/277V, 0-10V/Triac/ELV
		E4LK47ICA	4" Housing, 16.8W, 120V, Triac/ELV
		E4LK48ICAD	4" Housing, 16.8W, 120/277V, 0-10V/Triac/ELV
		E4LK78ICA	4" Housing, 18.9W, 120V, Triac/ELV
		E4LK79ICAD	4" Housing, 18.9W, 120/277V, 0-10V/Triac/ELV
	High Lumen New Construction ICA Housing For use with ELK21 & ELK24 Series Module 7 ¼" Height	E6LK43ICA	6" Housing, 16.8W, 120V, Triac/ELV
		E6LK44ICAD	6" Housing, 16.8W, 120/277V, 0-10V/Triac/ELV
		E6LK56ICA	6" Housing, 18.9W, 120V, Triac/ELV
		E6LK57ICAD	6" Housing, 18.9W, 120/277V, 0-10V/Triac/ELV
	Standard New Construction ICA Housing with Driver 5 ½" Height	E3LK65ICA	3" Housing, 12.5W, 120V, Triac/ELV
		E3LK65ICA-EM1	3" Housing, Emergency Battery Back-Up
		E3LK66ICAD	3" Housing, 12.5W, 120/277V, 0-10V/Triac/ELV
		E3LK66ICAD-EM1	3" Housing, Emergency Battery Back-Up
		E4LK87ICA	4" Housing, 12.5W, 120V, Triac/ELV
		E4LK87ICA-EM1	4" Housing, Emergency Battery Back-Up
		E4LK88ICAD	4" Housing, 12.5W, 120/277V, 0-10V/Triac/ELV
		E4LK88ICAD-EM1	4" Housing, Emergency Battery Back-Up
	Standard New Construction ICA Housing with Driver For use with ELK21 & ELK24 Series Module 7 ½" Height	E6LK37ICA	6" Housing, 14.7W, 120V, Triac/ELV
		E6LK37ICA-EM1	6" Housing, Emergency Battery Back-Up
		E6LK38ICAD	6" Housing, 14.7W, 120/277V, 0-10V/Triac/ELV
		E6LK38ICAD-EM1	6" Housing, Emergency Battery Back-Up
	Standard Remodel ICA Housing with Driver 5 ½" Height	E3LK65RICA	3" Housing, 12.5W, 120V, Triac/ELV
		E3LK66RICAD	3" Housing, 12.5W, 120/277V, 0-10V/Triac/ELV
		E4LK87RICA	4" Housing, 12.5W, 120V, Triac/ELV
		E4LK88RICAD	4" Housing, 12.5W, 120/277V, 0-10V/Triac/ELV
	2-Hour Fire Rated ICA Housing with Driver 7 ½" Height - Sound Rated FIRE RATED	ELK72FICA	3" Housing, 10.5W, 120V, Triac/ELV
		ELK73FICAD	3" Housing, 10.5W, 120/277V, 0-10V/Triac/ELV
		ELK93FICA	4" Housing, 11.8W, 120V, Triac/ELV
		ELK94FICAD	4" Housing, 11.8W, 120/277V, 0-10V/Triac/ELV

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

2" Pex™ Diecast Trims for Koto™ Architectural Module

	Description		CAT. #	Specs
	2" Round Deep Reflector 3 ½" O.D. - 2 ⅛" I.D.	WET LOCATION	ELK2818W	All White
			ELK2818BB	All Black
			ELK2818BZ	All Bronze
			ELK2818B	Black/White Ring
			ELK2818H	Haze/White Ring
	2" Round Adjustable Pinhole 3 ½" O.D. - 1 ½" I.D.	DAMP LOCATION	ELK2827W	All White
			ELK2827BB	All Black
			ELK2827BZ	All Bronze
			ELK2827B	Black/White Ring
	2" Round Adjustable Reflector 3 ½" O.D. - 2 ⅜" I.D. - 30° tilt	DAMP LOCATION	ELK2829W	All White
			ELK2829BB	All Black
			ELK2829BZ	All Bronze
			ELK2829B	Black/White Ring
			ELK2829H	Haze/White Ring
	2" Round Sleek Reflector 3 ½" O.D. - 2 ½" I.D.	WET LOCATION	ELK2863W	All White
			ELK2863BB	All Black
	2" Round Sleek Wall Wash Reflector NEW! 3 ½" O.D. - 1 ⅜" I.D.	WET LOCATION	ELK2883W	All White
			ELK2883BB	All Black
	2" Round Curved Reflector 3 ½" O.D. - 1 ½" I.D.	WET LOCATION	ELK2872W	All White
			ELK2872B	All Black
	2" Round Adjustable Gimbal 3 ½" O.D. - 1 ½" I.D. - 30° tilt	DAMP LOCATION	ELK2888W	All White
			ELK2888B	All Black
			ELK2888BZ	All Bronze
	2" Square Deep Reflector 3 ½" Sq. - 2 ⅛" I.D.	WET LOCATION	ELK2518W	All White
			ELK2518BB	All Black
			ELK2518B	Black/White Ring
	2" Square Adjustable Reflector 3 ½" Sq. - 2 ⅜" I.D. - 30° tilt	DAMP LOCATION	ELK2529W	All White
			ELK2529BB	All Black
			ELK2529B	Black/White Ring
	2" Square Reflector 3 ½" Sq. - 1 ⅜" Sq.	WET LOCATION	ELK2541W	All White
			ELK2541BB	All Black
			ELK2541B	Black/White Ring
	2" Square Adjustable Pinhole 3 ½" Sq. - 1 ½" Sq. - 30° tilt	DAMP LOCATION	ELK2527W	All White
			ELK2527BB	All Black
			ELK2527B	Black/White Ring
	2" Square Gimbal 3 ½" Sq. - 1 ½" I.D. - 30° tilt	DAMP LOCATION	ELK2588W	All White
			ELK2588B	All Black
			ELK2588BZ	All Bronze

2" Pex™ Trimless for Koto™ Architectural Module

	Description		CAT. #	Specs
	2" Round Adjustable Trimless Reflector 2 ⅝" O.D.	DAMP LOCATION	ELK215W	White
			ELK215B	Black
	2" Round Trimless Spackle Frame 7" O.D. - 2 ½" I.D.		EL2SFR	For use with ELK215

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

3" Pex™ Diecast Trims for Koto™ Architectural Module

	Description		CAT. #	Specs
	3" Round Deep Reflector 4 ⅜" O.D. - 3" I.D.	WET LOCATION	ELK3618W	All White
			ELK3618BB	All Black
			ELK3618BZ	All Bronze
			ELK3618B	Black/White Ring
			ELK3618C	Chrome/White Ring
			ELK3618H	Haze/White Ring
	3" Round Adjustable Reflector 4 ⅜" O.D. - 3" I.D. - 15° - 30° tilt	DAMP LOCATION	ELK3629W	All White
			ELK3629BB	All Black
			ELK3629BZ	All Bronze
			ELK3629B	Black/White Ring
			ELK3629C	Chrome/White Ring
			ELK3629H	Haze/White Ring
	3" Round Adjustable Pinhole 4 ⅜" O.D. - 1 ¾" I.D. - 15° - 30° tilt	DAMP LOCATION	ELK3627W	All White
			ELK3627B	Black/White Ring
			ELK3627H	Haze/White Ring
			ELK3627BB	All Black
			ELK3627BZ	All Bronze
	3" Round Adjustable Slot Aperture 4 ⅜" O.D. - 45° tilt	DAMP LOCATION	ELK3620W	Black Slot/White Ring
	3" Round Adjustable Reflector Wall Wash 4 ⅜" O.D. - 3" I.D. - 45° tilt	DAMP LOCATION	ELK3622W	All White
	3" Round Sleek Regressed Eyeball 4 ⅜" O.D. - 2 ⅞" I.D. - 15° - 30° tilt	WET LOCATION	ELK3653W	All White
			ELK3653BB	All Black
	3" Round Sleek Reflector 4 ⅜" O.D. - 3 ⅜" I.D.	WET LOCATION	ELK3663W	All White
			ELK3663BB	All Black
	3" Round Sleek Wall Wash Reflector NEW! 3 ½" O.D. - 1 ⅜" I.D.	WET LOCATION	ELK3683W	All White
			ELK3683BB	All Black
	3" Round Curved Reflector 4 ⅜" O.D. - 1 ½" I.D.	WET LOCATION	ELK3672W	All White
			ELK3672B	All Black
	3" Round Directional Gimbal 4 ⅜" O.D. - 3" I.D. - 25° tilt	DAMP LOCATION	ELK3679W	All White
			ELK3679B	Black/White Ring
			ELK3679H	Haze/White Ring
			ELK3679BB	All Black
	3" Round Adjustable Baffle 4 ⅜" O.D. - 3" I.D. - 35° tilt	DAMP LOCATION	ELK3693W	All White
	3" Square Deep Reflector 4 ⅜" Sq. - 3" I.D.	WET LOCATION	ELK3318W	All White
			ELK3318B	Black/White Ring
			ELK3318BB	All Black
			ELK3318BZ	All Bronze
			ELK3318C	Chrome/White Ring
			ELK3318H	Haze/White Ring
	3" Square Adjustable Reflector 4 ⅜" Sq. - 3" I.D. - 15° - 30° tilt	DAMP LOCATION	ELK3329W	All White
			ELK3329BB	All Black
			ELK3329BZ	All Bronze
			ELK3329B	Black/White Ring
			ELK3329C	Chrome/White Ring
			ELK3329H	Haze/White Ring

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

3" Pex™ Diecast Trims for Koto™ Architectural Module

	Description		CAT. #	Specs
	3" Square Adjustable Reflector Wall Wash 4 ⅜" Sq. - 3" I.D. - 35° tilt	DAMP LOCATION	ELK3322W	All White
	3" Square Adjustable Pinhole 4 ⅜" Sq. - 2" Sq. - 15° - 30° tilt	DAMP LOCATION	ELK3327W	All White
			ELK3327B	Black/White Ring
			ELK3327H	Haze/White Ring
			ELK3327BB	All Black
			ELK3327BZ	All Bronze
	3" Square Reflector 4 ⅜" Sq. - 2" Sq.	WET LOCATION	ELK3341W	All White
			ELK3341B	Black/White Ring
			ELK3341BB	All Black
			ELK3341BZ	All Bronze
	3" Square Adjustable Baffle 4 ⅜" Sq. - 3" I.D. - 35° tilt	DAMP LOCATION	ELK3393W	All White

3" Pex™ Flush Mount Trim Adapters for Koto™ Trims

	Description	CAT. #	Specs
	3" Round Flush Mount Spackle Frame 7 ⅛" O.D. - 4 ⅜" I.D.	EL3FMR	For 3" Pex Round Trims
	3" Square Flush Mount Spackle Frame 7 ⅛" Sq. - 4 ⅜" Sq.	EL3FMS	For 3" Pex Square Trims

3" Pex™ Trimless for Koto™ Architectural Module

	Description		CAT. #	Specs
	3" Round Trimless Reflector 3" O.D.	WET LOCATION	ELK308W	White
			ELK308B	Black
			ELK308H	Haze
	3" Round Adjustable Trimless Reflector 3" O.D. - 35° tilt	DAMP LOCATION	ELK315W	White
			ELK315B	Black
			ELK315H	Haze
	3" Round Trimless Spackle Frame 7" O.D. - 3" I.D.		EL3SFR	For use with ELK315
	3" Round Knife Edge Wood Ceiling Trim with Mounting Clips 3 ⅞" O.D. - 3 ⅜" I.D.		EL3WCRW	White, for use with ELK315
			EL3WCRB	Black, for use with ELK315
	3" Square Trimless Reflector 2 ⅜" Sq.	WET LOCATION	ELK370W	White
			ELK370B	Black
			ELK370H	Haze
	3" Square Adjustable Trimless Reflector 2 ⅜" Sq. - 35° tilt	DAMP LOCATION	ELK381W	White
			ELK381B	Black
			ELK381H	Haze
	3" Square Trimless Spackle Frame 5 ⅞" Sq. - 2 ½" Sq.		EL03SFS	For use with ELK370 & ELK381

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ Architectural Module

	Description		CAT. #	Specs
	4" Round Shallow Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	ELK4116W	All White
			ELK4116H	Haze/White Ring
	4" Round Deep Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	ELK4118W	All White
			ELK4118BB	All Black
			ELK4118BZ	All Bronze
			ELK4118B	Black/White Ring
			ELK4118C	Chrome/White Ring
			ELK4118H	Haze/White Ring
	4" Round Adjustable Reflector 5" O.D. - 4" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4129W	All White
			ELK4129BB	All Black
			ELK4129BZ	All Bronze
			ELK4129B	Black/White Ring
			ELK4129C	Chrome/White Ring
			ELK4129H	Haze/White Ring
	4" Round Adjustable Reflector with Clear Glass Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	WET LOCATION	ELK4111W	All White
			ELK4111BB	All Black
			ELK4111BZ	All Bronze
			ELK4111B	Black/White Ring
			ELK4111C	Chrome/White Ring
			ELK4111H	Haze/White Ring
	4" Round Adjustable Reflector with Frosted Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	WET LOCATION	ELK4112W	All White
			ELK4112BB	All Black
			ELK4112BZ	All Bronze
			ELK4112B	Black/White Ring
	4" Round Rotatable Slot Aperture 5" O.D. - 4" I.D. - 45° tilt	DAMP LOCATION	ELK4120W	Black Inside/White Ring
	4" Round Adjustable Wall Wash 5" O.D. - 3 ¾" I.D. - 45° tilt	DAMP LOCATION	ELK4122W	All White
	4" Round Adjustable Pinhole 5" O.D. - 2" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4127W	All White
			ELK4127BB	All Black
			ELK4127BZ	All Bronze
			ELK4127B	Black/White Ring
			ELK4127H	Haze/White Ring
	4" Round Adjustable Pinhole with Frosted Lens 5" O.D. - 2" I.D. - 25° - 35° tilt	WET LOCATION	ELK4125W	All White
			ELK4125BB	All Black
			ELK4125BZ	All Bronze
			ELK4125H	Haze/White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ Architectural Module

	Description		CAT. #	Specs
	4" Round Slot Aperture 5" O.D. - 2 ⅜" I.D. - 45° tilt	DAMP LOCATION	ELK4130W	Black Inside/White Ring
	4" Round Sleek Regressed Eyeball 5" O.D. - 3 ½" I.D. - 15° - 30° tilt	WET LOCATION	ELK4153W	All White
			ELK4153BB	All Black
			ELK4153B	Black/White Ring
	4" Round Sleek Reflector 5" O.D. - 3 ⅞" I.D.	WET LOCATION	ELK4163W	All White
			ELK4163BB	All Black
	4" Round Sleek Wall Wash Reflector 5" O.D. - 3 ½" I.D.	NEW! WET LOCATION	ELK4183W	All White
			ELK4183BB	All Black
	4" Round Curved Reflector 5" O.D. - 1 ½" I.D.	WET LOCATION	ELK4172W	All White
			ELK4172B	All Black
	4" Round Directional Gimbal 5" O.D. - 3 ½" I.D. - 25° tilt	DAMP LOCATION	ELK4179W	All White
			ELK4179BB	All Black
			ELK4179B	Black/White Ring
			ELK4179H	Haze/White Ring
	4" Round Adjustable Spot 5" O.D. - 3 ⅝" I.D. - 25° tilt	DAMP LOCATION	ELK4188W	All White
			ELK4188BB	All Black
			ELK4188BZ	All Bronze
	4" Round Adjustable Baffle 5" O.D. - 4" I.D. - 35° tilt	DAMP LOCATION	ELK4193W	All White
			ELK4193BB	All Black
			ELK4193B	Black/White Ring
	4" Square Shallow Reflector 5" Sq. - 3 ⅝" I.D.	WET LOCATION	ELK4216W	All White
			ELK4216H	Haze/White Ring
	4" Square Deep Reflector 5" Sq. - 3 ¾" I.D.	WET LOCATION	ELK4218W	All White
			ELK4218B	Black/White Ring
			ELK4218BB	All Black
			ELK4218BZ	All Bronze
			ELK4218C	Chrome/White Ring
			ELK4218H	Haze/White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ Architectural Module

	Description		CAT. #	Specs
	4" Square Adjustable Reflector 5" Sq. - 3 5⁄8" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4229W	All White
			ELK4229BB	All Black
			ELK4229BZ	All Bronze
			ELK4229B	Black/White Ring
			ELK4229C	Chrome/White Ring
			ELK4229H	Haze/White Ring
	4" Square Adjustable Pinhole with Frosted Lens 5" Sq. - 2 ½" Sq. - 25° - 35° tilt	WET LOCATION	ELK4212W	All White
			ELK4212BB	All Black
			ELK4212BZ	All Bronze
			ELK4212B	Black/White Ring
			ELK4212H	Haze/White Ring
	4" Square Adjustable Slot Rotatable Aperture 5" Sq. - 4" I.D. - 45° tilt	DAMP LOCATION	ELK4220W	Black Slot/White Ring
	4" Square Adjustable Wall Wash 5" Sq. - 3 ¾" I.D. - 45° tilt	DAMP LOCATION	ELK4222W	White Ring
	4" Square Adjustable Pinhole 5" Sq. - 2 ½" Sq. - 25° - 35° tilt	DAMP LOCATION	ELK4227W	All White
			ELK4227BB	All Black
			ELK4227BZ	All Bronze
			ELK4227B	Black/White Ring
			ELK4227H	Haze/White Ring
	4" Square Adjustable Reflector 5" Sq. - 2 5⁄8" Sq. - 35° tilt	DAMP LOCATION	ELK4282W	All White
	4" Square Adjustable Baffle 5" Sq. - 3 5⁄8" Sq. - 35° tilt	DAMP LOCATION	ELK4284W	All White
			ELK4284B	All Black
			ELK4284BZ	All Bronze
	4" Square Adjustable Phenolic Baffle 5" Sq. - 4" I.D. - 35° tilt	DAMP LOCATION	ELK4293W	All White
			ELK4293BB	All Black
			ELK4293B	Black/White Ring

4" Pex™ Flush Mount Trim Adapters for Koto™ Trims

	Description	CAT. #	Specs
	4" Round Flush Mount Spackle Frame 7 1⁄8" O.D. - 5" I.D.	EL4FMR	For ELK4116, ELK4118, ELK4127, ELK4129, ELK4710, ELK4713, ELK4715
	4" Square Flush Mount Spackle Frame 7 1⁄8" Sq. - 4 3⁄8" Sq.	EL4FMS	For ELK4216, ELK4218, ELK4227, ELK4229

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com


The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims




95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Trimless for Koto™ Architectural Module

	Description		CAT. #	Specs
	4" Round Non-Adjustable Trimless Reflector 4" O.D.	WET LOCATION	ELK408W ELK408B ELK408H ELK408BZ	White Black Haze Bronze
	4" Round Adjustable Trimless Reflector 4" O.D. - 35° tilt	DAMP LOCATION	ELK415W ELK415B ELK415H ELK415BZ	White Black Haze Bronze
	4" Round Trimless Spackle Frame 7 ⅛" O.D. - 4" I.D.		EL4SFR	For use with ELK408 and ELK415
	4" Spackle Frame with Trimless Adjustable Reflector		ELK430W ELK430B ELK430BZ	White Black Bronze
	4" Spackle Frame with Trimless Adjustable Baffle		ELK434W ELK434B ELK434BZ	White Black Bronze
	4" Square Trimless Reflector 3 ¼" Sq.		ELK445W ELK445B	White Black
	4" Square Adjustable Trimless Reflector 3 ¼" Sq.	WET LOCATION	ELK459W ELK459B ELK459H	White Black Haze
	4" Square Trimless Spackle Frame 6 ¼" Sq. - 3 ⅛" Sq.	DAMP LOCATION	EL4SFS	For use with ELK445 and ELK459

4" Unique™ Trims for Koto™ Architectural Module

	Description		CAT. #	Specs
	4" Round Adjustable Reflector 5" O.D. - 3 ⅞" I.D. - 25° - 35° tilt	(S) DAMP LOCATION	ELK4710W	All White
			ELK4717W	All White, Deep Reflector
	4" Round Adjustable Baffle 5" O.D. - 3 ⅞" I.D. - 25° - 35° tilt	(S) DAMP LOCATION	ELK4713W	All White
	4" Square Reflector 4 ½" Sq. - 2 ¾" Sq.	(S) WET LOCATION	ELK4714W	All White
	4" Square Baffle 4 ⅝" Sq. - 2 ⅞" Sq.	(S) WET LOCATION	ELK4716W	All White

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Flexa™ Trims for Koto™ Architectural Module

	Description		CAT. #	Specs
	4" Round Adjustable Reflector 5" O.D. - 3 ⅛" I.D. - 35° tilt	DAMP LOCATION	ELK4721WW	All White
			ELK4721BB	All Black
			ELK4721BZBZ	All Bronze
			ELK4721BW	Black Ref./White Ring
			ELK4721CW	Chrome Ref./White Ring
			ELK4721HW	Haze Ref./White Ring
	4" Square Reflector 4 ¾" Sq. - 2 ⅜" Sq.	WET LOCATION	ELK4741WW	All White
			ELK4741BB	All Black
			ELK4741BZBZ	All Bronze
			ELK4741BW	Black Ref./White Ring
			ELK4741HW	Haze Ref./White Ring
	4" Round Baffle 5" O.D. - 3 ⅛" I.D. - 35° tilt	DAMP LOCATION	ELK4723WW	All White
			ELK4723BB	All Black
			ELK4723BZBZ	All Bronze
			ELK4723BW	Black Baffle/White Ring
	4" Square Baffle 4 ¾" Sq. - 2 ⅜" Sq.	WET LOCATION	ELK4743WW	All White
			ELK4743BB	All Black
			ELK4743BZBZ	All Bronze
			ELK4743BW	Black Baffle/White Ring
	4" Adjustable Square Reflector 4 ¾" Sq. - 2 ⅜" Sq. - 35° tilt	DAMP LOCATION	ELK4759WW	All White
			ELK4759BB	All Black
			ELK4759BW	Black Ref./White Ring
			ELK4759HW	Haze Ref./White Ring


5" & 6" Pex™ Trims for Koto™ Architectural Module

	Description		CAT. #	Specs
	5" Round Reflector 6 ¼" O.D. - 3 ⅝" I.D.	DAMP LOCATION	ELK5421W	All White
	5" Round Baffle 5 ½" O.D. - 3 ⅝" I.D.	DAMP LOCATION	ELK5493W	All White
	6" Round Reflector 7 ½" O.D. - 6" I.D.	WET LOCATION	ELK6418W	All White
			ELK6418BB	All Black
			ELK6418BZ	All Bronze
			ELK6418H	Haze Ref./White Ring
	6" Round Adjustable Reflector 7 ½" O.D. - 6" I.D. - 30° tilt	WET LOCATION	ELK6429W	All White
			ELK6429BB	All Black
			ELK6429BZ	All Bronze
			ELK6429H	Haze Ref./White Ring
	6" Round Adjustable Pinhole Reflector 8" O.D. - 1 ¾" I.D. - 25° tilt	DAMP LOCATION	ELK6427W	All White
			ELK6427B	Black Ref./White Ring
	6" Square Adjustable Reflector 6 ¾" Sq. - 4 ¼" Sq.	DAMP LOCATION	ELK6829W	All White
			ELK6829BB	All Black
			ELK6829H	Haze Ref./White Ring

The **Koto™ System**

Koto™ 24V Module & Twist-On Trims

FOR USE IN **POE** (POWER OVER ETHERNET) APPLICATIONS

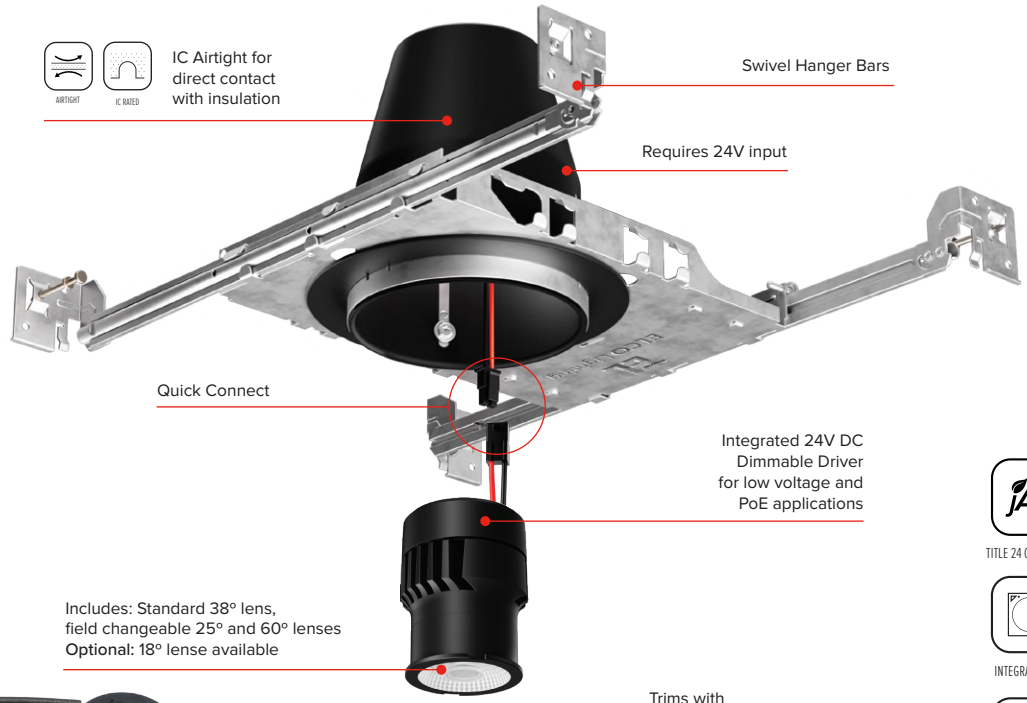



TITLE 24 COMPLIANT · DIMMABLE · INTEGRATED LED · WET LOCATION · 50,000 HOURS · 5 YEAR WARRANTY · 95+ CRI

Covered by U.S. PATENTS and Patents Pending


SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
2″ 3″ 4″ 5″ 6″	**Round** (Reflector, Baffle, Adjustable, Pinhole, Slot Aperture, Wall Wash, & Trimless) **Square** (Reflector, Adjustable, Pinhole, Slot Aperture, Wall Wash, & Trimless)	All White All Black All Bronze Black White Ring Haze White Ring Chrome White Ring	800 lm	2700K - 3000K

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims

95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

24V DC Koto™ LED Module & Housings

	Description	CAT. #	Specs
	**24V DC** Koto™ LED Module Works with Koto™ 24V DC Housings & Koto Twist-On Trims. 1 ½" Aperture - 2 ⅞" H Standard 38° lens Installed, with field changeable 25° & 60° lenses included Optional Lenses: 18° (EP731C), 90° (EP739C) TWIST-ON Optional: Louver (L45), Linear Lens (L46), Spread Lens (L47), Clear Lens (L48), Frosted Lens (L49), Snoot (L50), Color Shifter (L51) Single Asymmetric Lens (L54), Double Asymmetric Lens (L55)	ELK0827-24	10W, 800 lm, 2700K, 24V DC
		ELK0830-24	10W, 800 lm, 3000K, 24V DC
	**24V DC** Shallow Max. Adjustability IC Airtight New Construction Housing For shallow housing compatible trims look for this icon: S NEW!	E24V250ICA	2" Housing, 24V DC input. 3 ½" Height
		E24V362ICA	3" Housing, 24V DC input. 3 ½" Height
		E24V453ICA	4" Housing, 24V DC input. 3 ½" Height
	**24V DC** Max. Adjustability IC Airtight New Construction Housing	E24V276ICA	2" Housing, 24V DC input. 5 ½" Height
		E24V386ICA	3" Housing, 24V DC input. 5 ½" Height
		E24V485ICA	4" Housing, 24V DC input. 5 ½" Height
	**24V DC** Standard IC Airtight New Construction Housing	E24V390ICA	3" Housing, 24V DC input. 5 ½" Height
		E24V490ICA	4" Housing, 24V DC input. 5 ½" Height
		E24V770ICA	6" Housing, 24V DC input. 7" Height
	**24V DC** Shallow IC Airtight New Construction Housing For shallow housing compatible trims look for this icon: S	E24V760ICA	6" Shallow Housing, 24V DC input. 5 ½" Height
	**24V DC** Standard IC Airtight Remodel Housing	E24V390RICA	3" Housing, 24V DC input. 5 ½" Height
		E24V490RICA	4" Housing, 24V DC input. 5 ½" Height
		E24V770RICA	6" Housing, 24V DC input. 7 ½" Height
	**24V DC** Shallow IC Airtight Remodel Housing For shallow housing compatible trims look for this icon: S	E24V760RICA	6" Shallow Housing, 24V DC input. 5 ½" Height
	**R-60 Foam Insulation** **24V DC** Dedicated LED IC Airtight New Construction Housing For R-60 and Chicago Plenums	E24V490AJICA	4" Housing, 24V DC input. 5 ½" Height

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

24V DC Koto™ Housings

	Description		CAT. #	Specs
	2-Hour Fire Rated **24V DC** New Construction ICA Housing (Sound Rated)	FIRE RATED	E24V39FICA	3" Housing, 24V DC input. 6 ⅞" Height
			E24V48FICA	4" Housing, 24V DC input. 6 ⅞" Height
			E24V76FICA	6" Housing, 24V DC input. 7 ¾" Height
	Shallow 2-Hour Fire Rated **24V DC** New Construction ICA Housing (Sound Rated) For shallow housing compatible trims look for this icon: (S)	FIRE RATED	E24V75FICAS	6" Shallow Housing, 24V DC input. 6 ¼" Height.
	**24V DC** New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings	FIRE RATED NEW!	E24VJB276ICA	2" Housing, 24V DC input. 4 ⅛" Height
			E24VJB386ICA	3" Housing, 24V DC input. 4 ⅛" Height
			E24VJB483ICA	4" Housing, 24V DC input. 4 ⅛" Height

A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

2" Pex™ Diecast Trims for Koto™ 24V DC Module

	Description		CAT. #	Specs
	2" Round Deep Reflector 3 ½" O.D. - 2 ⅛" I.D.	WET LOCATION	ELK2818W	All White
			ELK2818BB	All Black
			ELK2818BZ	All Bronze
			ELK2818B	Black/White Ring
			ELK2818H	Haze/White Ring
	2" Round Adjustable Pinhole 3 ½" O.D. - 1 ½" I.D.- 30° tilt	DAMP LOCATION	ELK2827W	All White
			ELK2827BB	All Black
			ELK2827BZ	All Bronze
			ELK2827B	Black/White Ring
	2" Round Adjustable Reflector 3 ½" O.D. - 2 3⁄16" I.D. - 30° tilt	DAMP LOCATION	ELK2829W	All White
			ELK2829BB	All Black
			ELK2829BZ	All Bronze
			ELK2829B	Black/White Ring
			ELK2829H	Haze/White Ring
	2" Round Sleek Reflector 3 ½" O.D. - 2 ½" I.D.	WET LOCATION	ELK2863W	All White. Narrow Lip
			ELK2863BB	All Black. Narrow Lip
	2" Round Sleek Wall Wash Reflector NEW! 3 ½" O.D. - 1 ⅜" I.D.	WET LOCATION	ELK2883W	All White. Narrow Lip
			ELK2883BB	All Black. Narrow Lip
	2" Round Curved Reflector 3 ½" O.D. - 1 ½" I.D.	WET LOCATION	ELK2872W	All White
			ELK2872B	All Black
	2" Round Adjustable Gimbal 3 ½" O.D. - 1 ½" I.D. - 30° tilt	DAMP LOCATION	ELK2888W	All White
			ELK2888B	All Black
			ELK2888BZ	All Bronze
	2" Square Deep Reflector 3 ½" Sq. - 2 ⅛" I.D.	WET LOCATION	ELK2518W	All White
			ELK2518BB	All Black
			ELK2518B	Black/White Ring
	2" Square Adjustable Reflector 3 ½" Sq. - 2 3⁄16" I.D. - 30° tilt	DAMP LOCATION	ELK2529W	All White
			ELK2529BB	All Black
			ELK2529B	Black/White Ring
	2" Square Reflector 3 ½" Sq. - 1 ⅜" Sq.	WET LOCATION	ELK2541W	All White
			ELK2541BB	All Black
			ELK2541B	Black/White Ring
	2" Square Adjustable Pinhole 3 ½" Sq. - 1 ½" Sq. - 30° tilt	DAMP LOCATION	ELK2527W	All White
			ELK2527BB	All Black
			ELK2527B	Black/White Ring
	2" Square Gimbal 3 ½" Sq. - 1 ½" I.D. - 30° tilt	DAMP LOCATION	ELK2588W	All White
			ELK2588B	All Black
			ELK2588BZ	All Bronze

2" Pex™ Trimless for Koto™ 24V DC Module

	Description		CAT. #	Specs
	2" Round Adjustable Trimless Reflector 2 ⅝" O.D.	DAMP LOCATION	ELK215W	White
			ELK215B	Black
	2" Round Trimless Spackle Frame 7" O.D. - 2 ½" I.D.		EL2SFR	For use with ELK215

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

3" Pex™ Diecast Trims for Koto™ 24V DC Module

	Description		CAT. #	Specs
	3" Round Deep Reflector 4 ⅜" O.D. - 3" I.D.	WET LOCATION	ELK3618W	All White
			ELK3618BB	All Black
			ELK3618BZ	All Bronze
			ELK3618B	Black/White Ring
			ELK3618C	Chrome/White Ring
			ELK3618H	Haze/White Ring
	3" Round Adjustable Reflector 4 ⅜" O.D. - 3" I.D. - 15° - 30° tilt	(S) DAMP LOCATION	ELK3629W	All White
			ELK3629BB	All Black
			ELK3629BZ	All Bronze
			ELK3629B	Black/White Ring
			ELK3629C	Chrome/White Ring
			ELK3629H	Haze/White Ring
	3" Round Adjustable Pinhole 4 ⅜" O.D. - 1 ¾" I.D. - 15° - 30° tilt	(S) DAMP LOCATION	ELK3627W	All White
			ELK3627B	Black/White Ring
			ELK3627H	Haze/White Ring
			ELK3627BB	All Black
			ELK3627BZ	All Bronze
	3" Round Adjustable Slot Aperture 4 ⅜" O.D. - 45° tilt	DAMP LOCATION	ELK3620W	Black Slot/White Ring
	3" Round Adjustable Reflector Wall Wash 4 ⅜" O.D. - 3" I.D. - 45° tilt	DAMP LOCATION	ELK3622W	All White
	3" Round Sleek Regressed Eyeball 4 ⅜" O.D. - 2 ⅞" I.D. - 15° - 30° tilt	(S) WET LOCATION	ELK3653W	All White. Narrow Lip
			ELK3653BB	All Black. Narrow Lip
	3" Round Sleek Reflector 4 ⅜" O.D. - 3 ⅜" I.D.	WET LOCATION	ELK3663W	All White. Narrow Lip
			ELK3663BB	All Black. Narrow Lip
	3" Round Sleek Wall Wash Reflector 3 ½" O.D. - 1 ⅜" I.D.	NEW! WET LOCATION	ELK3683W	All White. Narrow Lip
			ELK3683BB	All Black. Narrow Lip
	3" Round Curved Reflector 4 ⅜" O.D. - 1 ½" I.D.	(S) WET LOCATION	ELK3672W	All White
			ELK3672B	All Black
	3" Round Directional Gimbal 4 ⅜" O.D. - 3" I.D. - 25° tilt	(S) DAMP LOCATION	ELK3679W	All White
			ELK3679B	Black/White Ring
			ELK3679H	Haze/White Ring
			ELK3679BB	All Black
	3" Round Adjustable Baffle 4 ⅜" O.D. - 3" I.D. - 35° tilt	DAMP LOCATION	ELK3693W	All White
	3" Square Deep Reflector 4 ⅜" Sq. - 3" I.D.	WET LOCATION	ELK3318W	All White
			ELK3318B	Black/White Ring
			ELK3318BB	All Black
			ELK3318BZ	All Bronze
			ELK3318C	Chrome/White Ring
			ELK3318H	Haze/White Ring
	3" Square Adjustable Reflector 4 ⅜" Sq. - 3" I.D. - 15° - 30° tilt	(S) DAMP LOCATION	ELK3329W	All White
			ELK3329BB	All Black
			ELK3329BZ	All Bronze
			ELK3329B	Black/White Ring
			ELK3329C	Chrome/White Ring
			ELK3329H	Haze/White Ring

The Koto™ **System**

1 ½″ Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE



3″ Pex™ Diecast Trims for Koto™ 24V DC Module

	Description		CAT. #	Specs
	3″ Square Adjustable Reflector Wall Wash 4 ⅜″ Sq. - 3″ I.D. - 35° tilt	DAMP LOCATION	ELK3322W	All White
	3″ Square Adjustable Pinhole 4 ⅜″ Sq. - 2″ Sq. - 15° - 30° tilt	S, DAMP LOCATION	ELK3327W	All White
			ELK3327B	Black/White Ring
			ELK3327H	Haze/White Ring
			ELK3327BB	All Black
			ELK3327BZ	All Bronze
	3″ Square Reflector 4 ⅜″ Sq. - 2″ Sq.	S, WET LOCATION	ELK3341W	All White
			ELK3341B	Black/White Ring
			ELK3341BB	All Black
			ELK3341BZ	All Bronze
	3″ Square Adjustable Baffle 4 ⅜″ Sq. - 3″ I.D. - 35° tilt	DAMP LOCATION	ELK3393W	All White

3″ Pex™ Flush Mount Trim Adapters for Koto™ Trims

	Description	CAT. #	Specs
	3″ Round Flush Mount Spackle Frame 7 ⅛″ O.D. - 4 ⅜″ I.D.	EL3FMR	For 3″ Pex Round Trims
	3″ Square Flush Mount Spackle Frame 7 ⅛″ Sq. - 4 ⅜″ Sq.	EL3FMS	For 3″ Pex Square Trims

3″ Pex™ Trimless for Koto™ 24V DC Module

	Description		CAT. #	Specs
	3″ Round Trimless Reflector 3″ O.D.	S, WET LOCATION	ELK308W	White
			ELK308B	Black
			ELK308H	Haze
	3″ Round Adjustable Trimless Reflector 3″ O.D. - 35° tilt	S, DAMP LOCATION	ELK315W	White
			ELK315B	Black
			ELK315H	Haze
	3″ Round Trimless Spackle Frame 7″ O.D. - 3″ I.D.		EL3SFR	For use with ELK308 & ELK315
	3″ Round Trimless Wood Ceiling Ring 3 ⅛″ O.D.		EL3WCARD	For use with ELK308 & ELK315
	3″ Round Knife Edge Wood Ceiling Trim with Mounting Clips 3 ⅞″ O.D. - 3 ⅜₁₆″ I.D.		EL3WCRW	White, for use with ELK308 & ELK315
			EL3WCRB	Black, for use with ELK308 & ELK315
	3″ Square Trimless Reflector 2 ⅜₁₆″ Sq.	S, WET LOCATION	ELK370W	White
			ELK370B	Black
			ELK370H	Haze
	3″ Square Adjustable Trimless Reflector 2 ⅜₁₆″ Sq. - 35° tilt	S, DAMP LOCATION	ELK381W	White
			ELK381B	Black
			ELK381H	Haze
	3″ Square Trimless Spackle Frame 5 ⅞″ Sq. - 2 ½″ Sq.		EL03SFS	For use with ELK370 & ELK381

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ 24V DC Module

	Description		CAT. #	Specs
	4" Round Shallow Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	ELK4116W	All White
			ELK4116H	Haze/White Ring
	4" Round Deep Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	ELK4118W	All White
			ELK4118BB	All Black
			ELK4118BZ	All Bronze
			ELK4118B	Black/White Ring
			ELK4118C	Chrome/White Ring
			ELK4118H	Haze/White Ring
	4" Round Adjustable Reflector 5" O.D. - 4" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4129W	All White
			ELK4129BB	All Black
			ELK4129BZ	All Bronze
			ELK4129B	Black/White Ring
			ELK4129C	Chrome/White Ring
			ELK4129H	Haze/White Ring
	4" Round Adjustable Reflector with Clear Glass Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	WET LOCATION	ELK4111W	All White
			ELK4111BB	All Black
			ELK4111BZ	All Bronze
			ELK4111B	Black/White Ring
			ELK4111C	Chrome/White Ring
			ELK4111H	Haze/White Ring
	4" Round Adjustable Reflector with Frosted Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	WET LOCATION	ELK4112W	All White
			ELK4112BB	All Black
			ELK4112BZ	All Bronze
			ELK4112B	Black/White Ring
			ELK4112C	Chrome/White Ring
			ELK4112H	Haze/White Ring
	4" Round Rotatable Slot Aperture 5" O.D. - 4" I.D. - 45° tilt	DAMP LOCATION	ELK4120W	Black Inside/White Ring
	4" Round Adjustable Wall Wash 5" O.D. - 3 ¾" I.D. - 45° tilt	DAMP LOCATION	ELK4122W	All White
	4" Round Adjustable Pinhole 5" O.D. - 2" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4127W	All White
			ELK4127BB	All Black
			ELK4127BZ	All Bronze
			ELK4127B	Black/White Ring
			ELK4127H	Haze/White Ring
	4" Round Adjustable Pinhole with Frosted Lens 5" O.D. - 2" I.D. - 25° - 35° tilt	WET LOCATION	ELK4125W	All White
			ELK4125BB	All Black
			ELK4125BZ	All Bronze
			ELK4125H	Haze/White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ 24V DC Module

	Description		CAT. #	Specs
	4" Round Slot Aperture 5" O.D. - 2 ⅜" I.D. - 45° tilt	DAMP LOCATION	ELK4130W	Black Inside/White Ring
	4" Round Sleek Regressed Eyeball (S) 5" O.D. - 3 ½" I.D. - 15° - 30° tilt	WET LOCATION	ELK4153W	All White. Narrow Ring
			ELK4153BB	All Black. Narrow Ring
			ELK4153B	Black/White Ring. Narrow Ring
	4" Round Sleek Reflector 5" O.D. - 3 ⅞" I.D.	WET LOCATION	ELK4163W	All White
			ELK4163BB	All Black
	4" Round Sleek Wall Wash Reflector 5" O.D. - 3 ½" I.D.	WET LOCATION	ELK4183W	All White
		NEW!	ELK4183BB	All Black
	4" Round Curved Reflector (S) 5" O.D. - 1 ½" I.D.	WET LOCATION	ELK4172W	All White
			ELK4172B	All Black
	4" Round Directional Gimbal (S) 5" O.D. - 3 ½" I.D. - 25° tilt	DAMP LOCATION	ELK4179W	All White
			ELK4179BB	All Black
			ELK4179B	Black/White Ring
			ELK4179H	Haze/White Ring
	4" Round Adjustable Spot (S) 5" O.D. - 3 ⅝" I.D. - 25° tilt	DAMP LOCATION	ELK4188W	All White
			ELK4188BB	All Black
			ELK4188BZ	All Bronze
	4" Round Adjustable Baffle 5" O.D. - 4" I.D. - 35° tilt	DAMP LOCATION	ELK4193W	All White
			ELK4193BB	All Black
			ELK4193B	Black/White Ring
	4" Square Shallow Reflector (S) 5" Sq. - 3 ⅝" I.D.	WET LOCATION	ELK4216W	All White
			ELK4216H	Haze/White Ring
	4" Square Deep Reflector 5" Sq. - 3 ¾" I.D.	WET LOCATION	ELK4218W	All White
			ELK4218B	Black/White Ring
			ELK4218BB	All Black
			ELK4218BZ	All Bronze
			ELK4218C	Chrome/White Ring
			ELK4218H	Haze/White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ 24V DC Module

	Description		CAT. #	Specs
	4" Square Adjustable Reflector 5" Sq. - 3 ⅝" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4229W	All White
			ELK4229BB	All Black
			ELK4229BZ	All Bronze
			ELK4229B	Black/White Ring
			ELK4229C	Chrome/White Ring
			ELK4229H	Haze/White Ring
	4" Square Adjustable Pinhole with Frosted Lens 5" Sq. - 2 ½" Sq. - 25° - 35° tilt	WET LOCATION	ELK4212W	All White
			ELK4212BB	All Black
			ELK4212BZ	All Bronze
			ELK4212B	Black/White Ring
	4" Square Adjustable Slot Rotatable Aperture 5" Sq. - 4" I.D. - 45° tilt	DAMP LOCATION	ELK4220W	Black Slot/White Ring
	4" Square Adjustable Wall Wash 5" Sq. - 3 ¾" I.D. - 45° tilt	DAMP LOCATION	ELK4222W	White Ring
	4" Square Adjustable Pinhole 5" Sq. - 2 ½" Sq. - 25° - 35° tilt	DAMP LOCATION	ELK4227W	All White
			ELK4227BB	All Black
			ELK4227BZ	All Bronze
			ELK4227B	Black/White Ring
			ELK4227H	Haze/White Ring
	4" Square Adjustable Reflector 5" Sq. - 2 ⅝" Sq. - 35° tilt	DAMP LOCATION	ELK4282W	All White
	4" Square Adjustable Baffle 5" Sq. - 3 ⅝" Sq. - 35° tilt	DAMP LOCATION	ELK4284W	All White
			ELK4284B	All Black
			ELK4284BZ	All Bronze
	4" Square Adjustable Phenolic Baffle 5" Sq. - 4" I.D. - 35° tilt	DAMP LOCATION	ELK4293W	All White
			ELK4293BB	All Black
			ELK4293B	Black/White Ring

4" Pex™ Flush Mount Trim Adapters for Koto™ Trims

	Description	CAT. #	Specs
	4" Round Flush Mount Spackle Frame 7 ⅛" O.D. - 5" I.D.	EL4FMR	For ELK4116, ELK4118, ELK4127, ELK4129, ELK4710, ELK4713, ELK4715
	4" Square Flush Mount Spackle Frame 7 ⅛" Sq. - 4 ⅜" Sq.	EL4FMS	For ELK4216, ELK4218, ELK4227, ELK4229


The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Trimless for Koto™ 24V DC Module

	Description		CAT. #	Specs
	4" Round Non-Adjustable Trimless Reflector 4" O.D.	WET LOCATION	ELK408W ELK408B ELK408H ELK408BZ	White Black Haze Bronze
	4" Round Adjustable Trimless Reflector 4" O.D. - 35° tilt	DAMP LOCATION	ELK415W ELK415B ELK415H ELK415BZ	White Black Haze Bronze
	4" Round Trimless Spackle Frame 7 ⅛" O.D. - 4" I.D.		EL4SFR	For use with ELK408 and ELK415
	4" Round Trimless Wood Ceiling Ring 4" O.D.		EL4WCARD	For use with ELK408 & ELK415
	4" Spackle Frame with Trimless Adjustable Reflector	DAMP LOCATION	ELK430W ELK430B ELK430BZ	White Black Bronze
	4" Spackle Frame with Trimless Adjustable Baffle	DAMP LOCATION	ELK434W ELK434B ELK434BZ	White Black Bronze
	4" Square Trimless Reflector 3 ¼" Sq.	WET LOCATION	ELK445W ELK445B	White Black
	4" Square Adjustable Trimless Reflector 3 ¼" Sq.- 35° tilt	DAMP LOCATION	ELK459W ELK459B ELK459H	White Black Haze
	4" Square Trimless Spackle Frame 6 ¼" Sq. - 3 ⅛" Sq.		EL4SFS	For use with ELK445 and ELK459

4" Unique™ Trims for Koto™ 24V DC Module

	Description		CAT. #	Specs
	4" Round Adjustable Reflector 5" O.D. - 3 ⅞" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4710W	All White. Shallow Compatible
			ELK4717W	All White, Deep Reflector. Not Shallow Compatible
	4" Round Adjustable Baffle 5" O.D. - 3 ⅞" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4713W	All White
	4" Square Reflector 4 ½" Sq. - 2 ¾" Sq.	WET LOCATION	ELK4714W	All White
	4" Square Baffle 4 ⅝" Sq. - 2 ⅞" Sq.	WET LOCATION	ELK4716W	All White

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Flexa™ Trims for Koto™ 24V DC Module

	Description		CAT. #	Specs
	4" Round Adjustable Reflector 5" O.D. - 3 ⅛" I.D. - 35° tilt	DAMP LOCATION	ELK4721WW	All White
			ELK4721BB	All Black
			ELK4721BZBZ	All Bronze
			ELK4721BW	Black Ref./White Ring
	4" Square Reflector 4 ¾" Sq. - 2 ⅜" Sq.	WET LOCATION	ELK4741WW	All White
			ELK4741BB	All Black
			ELK4741BW	Black Ref./White Ring
			ELK4741HW	Haze Ref./White Ring
	4" Round Baffle 5" O.D. - 3 ⅛" I.D. - 35° tilt	DAMP LOCATION	ELK4723WW	All White
			ELK4723BB	All Black
			ELK4723BZBZ	All Bronze
			ELK4723BW	Black Baffle/White Ring
	4" Square Baffle 4 ¾" Sq. - 2 ⅜" Sq.	WET LOCATION	ELK4743WW	All White
			ELK4743BB	All Black
			ELK4743BZBZ	All Bronze
			ELK4743BW	Black Baffle/White Ring
	4" Adjustable Square Reflector 4 ¾" Sq. - 2 ⅜" Sq. - 35° tilt	DAMP LOCATION	ELK4759WW	All White
			ELK4759BB	All Black
			ELK4759BW	Black Ref./White Ring
			ELK4759HW	Haze Ref./White Ring

6" Pex™ Trims for Koto™ 24V DC Module

	Description		CAT. #	Specs
	6" Round Reflector 7 ½" O.D. - 6" I.D.	S WET LOCATION	ELK6418W	All White
			ELK6418BB	All Black
			ELK6418BZ	All Bronze
			ELK6418H	Haze Ref./White Ring
	6" Round Adjustable Reflector 7 ½" O.D. - 6" I.D. - 30° tilt	S WET LOCATION	ELK6429W	All White
			ELK6429BB	All Black
			ELK6429BZ	All Bronze
			ELK6429H	Haze Ref./White Ring
	6" Round Adjustable Pinhole Reflector 8" O.D. - 1 ¾" I.D. - 25° tilt	S DAMP LOCATION	ELK6427W	All White
			ELK6427B	Black Ref./White Ring
	6" Square Adjustable Reflector 6 ¾" Sq. - 4 ¼" Sq.	S DAMP LOCATION	ELK6829W	All White
			ELK6829BB	All Black
			ELK6829H	Haze Ref./White Ring

Koto™ 12V AC Retrofit Module & Twist-On Trims

Works with 3" & 4" MR16 Bi-Pin Low Voltage Housings & Koto™ Trims

TITLE 24 COMPLIANT · INTEGRATED LED · 95+ CRI · 5 YEAR WARRANTY · 50,000 HOURS · WET LOCATION · DIMMABLE



Includes: Standard 38° lens,
field changeable 25° and 60° lenses
Optional: 18° lense available



Twist-On System for easy trim installation

Trims with Twist-On System

Die-Cast Aluminum Trims in a variety of shapes, colors and styles to match any room design



Covered by U.S. PATENTS and Patents Pending

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

12V AC Koto™ Retrofit LED Module

	Description		CAT. #	Specs
	**12V AC Retrofit** Koto™ LED Module Works with 3" & 4" MR16 Bi-Pin Low Voltage Housings & Koto Trims 1 ½" Aperture - 2 ⅞" H Standard 38° lens Installed, with field changeable 25° & 60° lenses included Optional Lenses: 18° (EP731C) Optional: Louver (L45), Linear Lens (L46), Spread Lens (L47), Single Asymmetric Lens (L54), Double Asymmetric Lens (L55)	TWIST-ON	ELK0827-12	9W, 800 lm, 2700K, 12V AC
			ELK0830-12	9W, 800 lm, 3000K, 12V AC
			ELK08SD-12	9W, 800 lm, Sunset, 12V AC

3" Pex™ Diecast Trims for Koto™ 12V AC Module

	Description		CAT. #	Specs
	3" Round Deep Reflector 4 ⅜" O.D. - 3" I.D.	WET LOCATION	ELK3618W	All White
			ELK3618BB	All Black
			ELK3618BZ	All Bronze
			ELK3618B	Black/White Ring
			ELK3618C	Chrome/White Ring
			ELK3618H	Haze/White Ring
	3" Round Adjustable Reflector 4 ⅜" O.D. - 3" I.D. - 15° - 30° tilt	DAMP LOCATION	ELK3629W	All White
			ELK3629BB	All Black
			ELK3629BZ	All Bronze
			ELK3629B	Black/White Ring
			ELK3629C	Chrome/White Ring
			ELK3629H	Haze/White Ring
	3" Round Adjustable Pinhole 4 ⅜" O.D. - 1 ¾" I.D. - 15° - 30° tilt	DAMP LOCATION	ELK3627W	All White
			ELK3627B	Black/White Ring
			ELK3627H	Haze/White Ring
			ELK3627BB	All Black
			ELK3627BZ	All Bronze
	3" Round Adjustable Slot Aperture 4 ⅜" O.D. - 45° tilt	DAMP LOCATION	ELK3620W	Black Slot/White Ring
	3" Round Sleek Regressed Eyeball 4 ⅜" O.D. - 2 ⅞" I.D. - 15° - 30° tilt	WET LOCATION	ELK3653W	All White
			ELK3653BB	All Black
	3" Round Sleek Reflector 4 ⅜" O.D. - 3 ⅜" I.D.	WET LOCATION	ELK3663W	All White
			ELK3663BB	All Black
	3" Round Sleek Wall Wash Reflector 3 ½" O.D. - 1 ⅜" I.D.	NEW! WET LOCATION	ELK3683W	All White
			ELK3683BB	All Black
	3" Round Curved Reflector 4 ⅜" O.D. - 1 ½" I.D.	WET LOCATION	ELK3672W	All White
			ELK3672B	All Black
	3" Round Directional Gimbal 4 ⅜" O.D. - 3" I.D. - 25° tilt	DAMP LOCATION	ELK3679W	All White
			ELK3679B	Black/White Ring
			ELK3679H	Haze/White Ring
			ELK3679BB	All Black

The Koto™ **System**

1 ½″ Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

3″ Pex™ Diecast Trims for Koto™ 12V AC Module

	Description		CAT. #	Specs
	3″ Round Adjustable Baffle 4 ⅜″ O.D. - 3″ I.D. - 35˚ tilt	DAMP LOCATION	ELK3693W	All White
	3″ Square Deep Reflector 4 ⅜″ Sq. - 3″ I.D.	WET LOCATION	ELK3318W	All White
			ELK3318B	Black/White Ring
			ELK3318BB	All Black
			ELK3318BZ	All Bronze
			ELK3318C	Chrome/White Ring
			ELK3318H	Haze/White Ring
	3″ Square Adjustable Reflector 4 ⅜″ Sq. - 3″ I.D. - 15˚ - 30˚ tilt	DAMP LOCATION	ELK3329W	All White
			ELK3329BB	All Black
			ELK3329BZ	All Bronze
			ELK3329B	Black/White Ring
			ELK3329C	Chrome/White Ring
			ELK3329H	Haze/White Ring
	3″ Square Adjustable Reflector Wall Wash 4 ⅜″ Sq. - 3″ I.D. - 35˚ tilt	DAMP LOCATION	ELK3322W	All White
	3″ Square Adjustable Pinhole 4 ⅜″ Sq. - 2″ Sq. - 15˚ - 30˚ tilt	DAMP LOCATION	ELK3327W	All White
			ELK3327B	Black/White Ring
			ELK3327H	Haze/White Ring
			ELK3327BB	All Black
			ELK3327BZ	All Bronze
	3″ Square Reflector 4 ⅜″ Sq. - 2″ Sq.	WET LOCATION	ELK3341W	All White
			ELK3341B	Black/White Ring
			ELK3341BB	All Black
			ELK3341BZ	All Bronze

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ 12V AC Module

	Description		CAT. #	Specs
	4" Round Shallow Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	ELK4116W	All White
			ELK4116H	Haze/White Ring
	4" Round Deep Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	ELK4118W	All White
			ELK4118BB	All Black
			ELK4118BZ	All Bronze
			ELK4118B	Black/White Ring
			ELK4118C	Chrome/White Ring
			ELK4118H	Haze/White Ring
	4" Round Adjustable Reflector 5" O.D. - 4" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4129W	All White
			ELK4129BB	All Black
			ELK4129BZ	All Bronze
			ELK4129B	Black/White Ring
			ELK4129C	Chrome/White Ring
			ELK4129H	Haze/White Ring
	4" Round Adjustable Reflector with Clear Glass Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	WET LOCATION	ELK4111W	All White
			ELK4111BB	All Black
			ELK4111BZ	All Bronze
			ELK4111B	Black/White Ring
			ELK4111C	Chrome/White Ring
			ELK4111H	Haze/White Ring
	4" Round Adjustable Reflector with Frosted Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	WET LOCATION	ELK4112W	All White
			ELK4112BB	All Black
			ELK4112BZ	All Bronze
			ELK4112B	Black/White Ring
			ELK4112C	Chrome/White Ring
			ELK4112H	Haze/White Ring
	4" Round Rotatable Slot Aperture 5" O.D. - 4" I.D. - 45° tilt	DAMP LOCATION	ELK4120W	Black Inside/White Ring
	4" Round Adjustable Wall Wash 5" O.D. - 3 ¾" I.D. - 45° tilt	DAMP LOCATION	ELK4122W	All White
	4" Round Adjustable Pinhole 5" O.D. - 2" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4127W	All White
			ELK4127BB	All Black
			ELK4127BZ	All Bronze
			ELK4127B	Black/White Ring
			ELK4127H	Haze/White Ring
	4" Round Adjustable Pinhole with Frosted Lens 5" O.D. - 2" I.D. - 25° - 35° tilt	WET LOCATION	ELK4125W	All White
			ELK4125BB	All Black
			ELK4125BZ	All Bronze
			ELK4125H	Haze/White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ 12V AC Module

Description		CAT. #	Specs
	4" Round Slot Aperture 5" O.D. - 2 ⅜" I.D. - 45° tilt DAMP LOCATION	ELK4130W	Black Inside/White Ring
	4" Round Sleek Regressed Eyeball 5" O.D. - 3 ½" I.D. - 15° - 30° tilt WET LOCATION	ELK4153W	All White
		ELK4153BB	All Black
		ELK4153B	Black/White Ring
	4" Round Sleek Reflector 5" O.D. - 3 ⅞" I.D. WET LOCATION	ELK4163W	All White
		ELK4163BB	All Black
	4" Round Sleek Wall Wash Reflector 5" O.D. - 3 ½" I.D. WET LOCATION NEW!	ELK4183W	All White
		ELK4183BB	All Black
	4" Round Curved Reflector 5" O.D. - 1 ½" I.D. WET LOCATION	ELK4172W	All White
		ELK4172B	All Black
	4" Round Directional Gimbal 5" O.D. - 3 ½" I.D. - 25° tilt DAMP LOCATION	ELK4179W	All White
		ELK4179BB	All Black
		ELK4179B	Black/White Ring
		ELK4179H	Haze/White Ring
	4" Round Adjustable Spot 5" O.D. - 3 ⅝" I.D. - 25° tilt DAMP LOCATION	ELK4188W	All White
		ELK4188BB	All Black
		ELK4188BZ	All Bronze
	4" Round Adjustable Baffle 5" O.D. - 4" I.D. - 35° tilt DAMP LOCATION	ELK4193W	All White
		ELK4193BB	All Black
		ELK4193B	Black/White Ring
	4" Square Shallow Reflector 5" Sq. - 3 ⅝" I.D. WET LOCATION	ELK4216W	All White
		ELK4216H	Haze/White Ring
	4" Square Deep Reflector 5" Sq. - 3 ¾" I.D. WET LOCATION	ELK4218W	All White
		ELK4218B	Black/White Ring
		ELK4218BB	All Black
		ELK4218BZ	All Bronze
		ELK4218C	Chrome/White Ring
		ELK4218H	Haze/White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Koto™ 12V AC Module

	Description		CAT. #	Specs
	4" Square Adjustable Reflector 5" Sq. - 3 5/8" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4229W	All White
			ELK4229BB	All Black
			ELK4229BZ	All Bronze
			ELK4229B	Black/White Ring
			ELK4229C	Chrome/White Ring
			ELK4229H	Haze/White Ring
	4" Square Adjustable Pinhole with Frosted Lens 5" Sq. - 2 ½" Sq. - 25° - 35° tilt	WET LOCATION	ELK4212W	All White
			ELK4212BB	All Black
			ELK4212BZ	All Bronze
			ELK4212B	Black/White Ring
			ELK4212H	Haze/White Ring
	4" Square Adjustable Pinhole 5" Sq. - 2 ½" Sq. - 25° - 35° tilt	DAMP LOCATION	ELK4227W	All White
			ELK4227BB	All Black
			ELK4227BZ	All Bronze
			ELK4227B	Black/White Ring
			ELK4227H	Haze/White Ring
	4" Square Adjustable Reflector 5" Sq. - 2 5/8" Sq. - 35° tilt	DAMP LOCATION	ELK4282W	All White
	4" Square Adjustable Baffle 5" Sq. - 3 5/8" Sq. - 35° tilt	DAMP LOCATION	ELK4284W	All White
			ELK4284B	All Black
			ELK4284BZ	All Bronze
	4" Square Adjustable Phenolic Baffle 5" Sq. - 4" I.D. - 35° tilt	DAMP LOCATION	ELK4293W	All White
			ELK4293BB	All Black
			ELK4293B	Black/White Ring

4" Pex™ Flush Mount Trim Adapters for Koto™ Trims

	Description	CAT. #	Specs
	4" Round Flush Mount Spackle Frame 7 1/8" O.D. - 5" I.D.	EL4FMR	For ELK4116, ELK4118, ELK4127, ELK4129, ELK4710, ELK4713, ELK4715
	4" Square Flush Mount Spackle Frame 7 1/8" Sq. - 4 3/8" Sq.	EL4FMS	For ELK4216, ELK4218, ELK4227, ELK4229

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Unique™ Trims for Koto™ 12V AC Module

	Description		CAT. #	Specs
	4" Round Adjustable Reflector 5" O.D. - 3 ⅞" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4710W	All White
			ELK4717W	All White, Deep Reflector
	4" Round Adjustable Baffle 5" O.D. - 3 ⅞" I.D. - 25° - 35° tilt	DAMP LOCATION	ELK4713W	All White
	4" Square Reflector 4 ½" Sq. - 2 ¾" Sq.	WET LOCATION	ELK4714W	All White
	4" Square Baffle 4 ⅝" Sq. - 2 ⅞" Sq.	WET LOCATION	ELK4716W	All White

4" Flexa™ Trims for Koto™ 12V AC Module

	Description		CAT. #	Specs
	4" Round Adjustable Reflector 5" O.D. - 3 ⅛" I.D. - 35° tilt	DAMP LOCATION	ELK4721WW	All White
			ELK4721BB	All Black
			ELK4721BZBZ	All Bronze
			ELK4721BW	Black Ref./White Ring
	4" Square Reflector 4 ¾" Sq. - 2 ⅜" Sq.	WET LOCATION	ELK4741WW	All White
			ELK4741BB	All Black
			ELK4741BW	Black Ref./White Ring
			ELK4741HW	Haze Ref./White Ring
	4" Round Baffle 5" O.D. - 3 ⅛" I.D. - 35° tilt	DAMP LOCATION	ELK4723WW	All White
			ELK4723BB	All Black
			ELK4723BZBZ	All Bronze
			ELK4723BW	Black Baffle/White Ring
	4" Square Baffle 4 ¾" Sq. - 2 ⅜" Sq.	WET LOCATION	ELK4743WW	All White
			ELK4743BB	All Black
			ELK4743BZBZ	All Bronze
			ELK4743BW	Black Baffle/White Ring
	4" Adjustable Square Reflector 4 ¾" Sq. - 2 ⅜" Sq. - 35° tilt	DAMP LOCATION	ELK4759WW	All White
			ELK4759BB	All Black
			ELK4759BW	Black Ref./White Ring
			ELK4759HW	Haze Ref./White Ring

The **Koto™ System**

Koto™ Downsizer Ring

REDUCES 8″, 7″, 6″, 5″ & 4″ EXISTING RECESSED HOUSINGS DOWN TO 2″, 3″ & 4″.




TITLE 24 COMPLIANT | DIMMABLE | INTEGRATED LED | WET LOCATION | DAMP LOCATION | 50,000 HOURS | 5 YEAR WARRANTY | 95+ CRI

The Koto™ **System**

Koto™ Downsizer Ring for Select Koto™ Modules and Trims


95+ CRI | IC RATED | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

NEW! The Koto™ Downsizer Ring

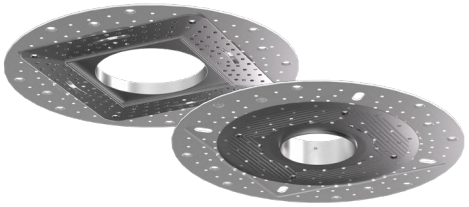

- ELCO's simple Downsizer Ring allows you to reduce 8", 7", 6", 5" and 4" existing recessed housings down to 2", 3" and 4".
- Compatible with Standard Koto™ LED Module, 10° Narrow Spot Koto™ Module, and Standard Koto™ Focus LED Module.
- For the complete selection of compatible Koto™ Modules and Trims see The Koto™ System (pg. 9).
- Access above ceiling may be required.

Koto™ Downsizer Rings and Compatible Trims

	Description	CAT. #	Specs
	**For 2" Koto™ Round Trimless** Downsizer Ring reduces 5", 6", 7", and 8" housings down to accept 2" Trimless 10 ½" O.D. - 2 ½" I.D.	EDSR-2SFRD	For use with ELK215W and ELK215B
	**For 2" Koto™ Round Trimless** Downsizer Ring reduces 3" and 4" housings down to accept 2" Trimless 7" O.D. - 2 ½" I.D.	EL2SFR	For use with ELK215W and ELK215B
	**For 2" Koto™ Round Trim** Downsizer Ring reduces 5", 6", 7", and 8" housings down to accept 2" Trim 10 ½" O.D. - 3" I.D.	EDSR-3SFRD	For use with ELK2818, ELK2829, ELK2827, ELK2863, ELK2872, ELK2888, ELK2518, ELK2529, ELK2527, ELK2541, ELK2588, and ELK2883 Series. (For complete selection of trim color finishes see The Koto™ System, pg. 9)
	**For 2" Koto™ Round Trim** Downsizer Ring reduces 3" and 4" housings down to accept 2" Trim 7" O.D. - 3" I.D.	EL3SFR	For use with ELK2818, ELK2829, ELK2827, ELK2863, ELK2872, ELK2888, ELK2518, ELK2529, ELK2527, ELK2541, ELK2588, and ELK2883 Series. (For complete selection of trim color finishes see The Koto™ System, pg. 9)
	**For 3" Koto™ Round Trimless** Downsizer Ring reduces 5", 6", 7", and 8" housings down to accept 3" Round Trimless 10 ½" O.D. - 3" I.D.	EDSR-3SFRD	For use with ELK315W, ELK315B, ELK315H, ELK308W, ELK308B, and ELK308H
	**For 3" Koto™ Round Trimless** Downsizer Ring reduces 4" housings down to accept 3" Round Trimless 7" O.D. - 3" I.D.	EL3SFR	For use with ELK315W, ELK315B, ELK315H, ELK308W, ELK308B, and ELK308H

The Koto™ **System**

Koto™ Downsizer Ring for Select Koto™ Modules and Trims

95+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

Koto™ Downsizer Rings and Compatible Trims

	Description	CAT. #	Specs
	**For 3″ Koto™ Square Trimless** Downsizer Ring reduces 5″, 6″, 7″, and 8″ housings down to accept 3″ Square Trimless 10 ½″ O.D. - 2 ½″ Sq.	EDSR-3SFSQ	For use with ELK370W, ELK370B, ELK370H, ELK381W, ELK381B, and ELK381H
	**For 3″ Koto™ Square Trimless** Downsizer Ring reduces 4″ housings down to accept 3″ Square Trimless 5 ⅞″ Sq.. - 2 ½″ Sq.	EL03SFS	For use with ELK370W, ELK370B, ELK370H, ELK381W, ELK381B, and ELK381H
	**For 4″ Koto™ Round Trimless** Downsizer Ring reduces 5″, 6″, 7″, and 8″ housings down to accept 4″ Round Trimless 10 ½″ O.D. - 4″ I.D.	EDSR-4SFRD	For use with ELK415W, ELK415B, ELK415BZ, ELK415H, ELK408W, ELK408B, ELK408BZ and ELK408H
	**For 4″ Koto™ Square Trimless** Downsizer Ring reduces 5″, 6″, 7″, and 8″ housings down to accept 4″ Square Trimless 10 ½″ O.D. - 3 ⅛″ Sq.	EDSR-4SFSQ	For use with ELK445W, ELK445B, ELK459W, ELK459B and ELK459H

Compatible Koto™ LED Modules

	Description		Specs
	**Standard** Koto™ LED Module 10° **Narrow Spot** Koto™ LED Module Koto™ **5-CCT** LED Module 1 ½″Aperture - 2 ⅞″ H	TWIST-ON	For complete module and specification selection see The Koto™ System (pg. 9)
	Koto™ **FOCUS** LED Module 1 ½″Aperture	TWIST-ON	For complete module and specification selection see The Koto™ System (pg. 9)


The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims






Accessories Field Changeable

Description	CAT. #	Specs
 Field Changeable Lens	EP731C	18° Lens
	EP732C	25° Lens
	EP733C	38° Lens
	EP734C	60° Lens
	EP739C	90° Lens
 Field Changeable Reflectors	EP735C	15° Reflector
	EP736C	25° Reflector
	EP737C	38° Reflector
	EP738C	60° Reflector
 Field Changeable Secondary Optic Hex Louver	L45	Black, for a better glare shield
	L57	White, for a better glare shield
 Field Changeable Secondary Optic Linear	L46	For a wide rectangular illumination pattern
 Field Changeable Secondary Optic Spread	L47	For a symmetrical broadening of light beams
 Field Changeable Secondary Optic Frosted Diffuser	L49	For a frosted lens look
 Field Changeable Secondary Optic Color Shifter	L51	For a reduced color temperature
 Field Changeable Secondary Optic Color Lens	L52	Blue lens
	L53	Pink lens
 Asymmetric Lens	L54	Single elliptical illumination pattern
	L55	Double elliptical illumination pattern for accent lighting
 Snoot for Koto™ Modules	L50W	White
	L50B	Black
 Hard Wire Adapter	PSA38	Hard wire adapter to male Quick Connect terminal
 4" Hard Wire Adapter	PSA38-4	4" Hard Wire Adapter to male Quick
 Rewiring Kit	PSA38-22	22" Rewiring Kit to male Quick Connect terminal.

The **Koto™ System**

Canless Koto™ LED Module

DESIGNED TO BE INSTALLED WITHOUT A RECESSED HOUSING!

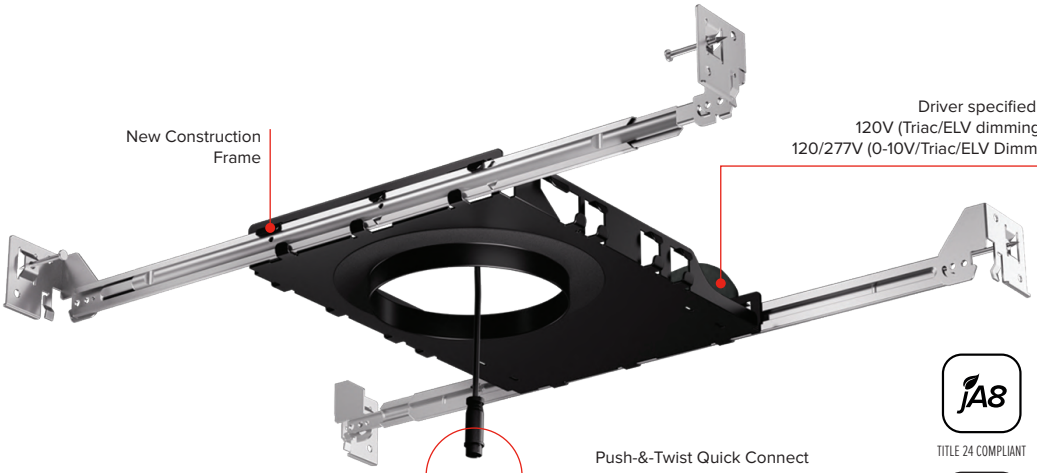

Push-&-Twist Quick Connect

Integrated Heat Sink for Superior Thermal Management

IC Rated Module

Includes: Standard 38° lens, field changeable 25° & 60° lenses

Optional: 18° lens available


Twist-On System




Mounting Clips




Die-Cast Aluminum Trims in a variety of shapes, colors and styles to match any room design

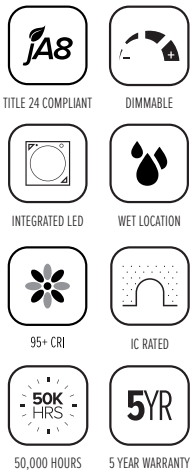

SIZES

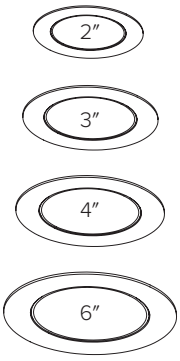

STYLES



Round
(Reflector, Baffle, Adjustable, Pinhole, Slot Aperture, and Wall Wash)

Square
(Reflector, Adjustable, Pinhole, Slot Aperture, and Wall Wash)

Trimless
(Round and Square)

FINISHES

All White


All Black

All Bronze

Haze White Ring

Chrome White Ring

LUMENS



Up to 950 lm

COLOR TEMPERATURE



2700K - 4000K & Sunset

Covered by U.S. PATENTS and Patents Pending

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

Canless Koto™ LED Module & Frames

	Description	CAT. #	Specs
	Canless Koto™ LED Module Designed to be installed without a recessed housing! 1 ½" Aperture - 2" H Standard 38° Lens Installed, with field changeable 25° & 60° lenses included Optional Lenses: 18° (EP731C) Optional: White Louver (L45) Black Louver (L57) Linear Lens (L46) Spread Lens (L47) Frosted Diffuser (L49) Single Asymmetric Lens (L54) Double Asymmetric Lens (L55) Color Shifter (L51)	EKCL2124D	Up to 950 lm, 2400K
		EKCL2127D	Up to 950 lm, 2700K
		EKCL2130D	Up to 950 lm, 3000K
		EKCL2135D	Up to 950 lm, 3500K
		EKCL2140D	Up to 950 lm, 4000K
		EKCL21SDD	Up to 950 lm, Sunset Dim to warm
		EKCL21HCD	Up to 950 lm, Human Centric Dim to warm
	Canless Koto™ New Construction Frames Driver specified for 120V (Triac/ELV) or 120/277V (0-10V/Triac/ELV) (Easy-to-Remove Driver on frame)	E2KCL10IC	2" Frame, 10.5W, 120V, Triac/ELV, 3" Cutout
		E2KCL10IC-EM1	8W, 90 Min. Battery Backup
		E2KCL10IC-EM2	15W, 90 Min. Battery Backup
		E2KCL10ICDX	2" Frame, 10.5W, 120-277V, 0-10V/Triac/ELV
		E2KCL10ICDX-EM1	8W, 90 Min. Battery Backup
		E2KCL10ICDX-EM2	15W, 90 Min. Battery Backup
		E3KCL10IC	3" Frame, 10.5W, 120V, Triac/ELV, 3 ⅝" Cutout
		E3KCL10IC-EM1	8W, 90 Min. Battery Backup
		E3KCL10IC-EM2	15W, 90 Min. Battery Backup
		E3KCL10ICDX	3" Frame, 10.5W, 120-277V, 0-10V/Triac/ELV
		E3KCL10ICDX-EM1	8W, 90 Min. Battery Backup
		E3KCL10ICDX-EM2	15W, 90 Min. Battery Backup
		E4KCL10IC	4" Frame, 10.5W, 120V, Triac/ELV, 4 ¼" Cutout
		E4KCL10IC-EM1	8W, 90 Min. Battery Backup
		E4KCL10IC-EM2	15W, 90 Min. Battery Backup
		E4KCL10ICDX	4" Frame, 10.5W, 120-277V, 0-10V/Triac/ELV
		E4KCL10ICDX-EM1	8W, 90 Min. Battery Backup
		E4KCL10ICDX-EM2	15W, 90 Min. Battery Backup
		E6KCL10IC	6" Frame, 10.5W, 120V, Triac/ELV, 6 ¼" Cutout
		E6KCL10IC-EM1	8W, 90 Min. Battery Backup
		E6KCL10IC-EM2	15W, 90 Min. Battery Backup
		E6KCL10ICDX	6" Frame, 10.5W, 120-277V, 0-10V/Triac/ELV
		E6KCL10ICDX-EM1	8W, 90 Min. Battery Backup
		E6KCL10ICDX-EM2	15W, 90 Min. Battery Backup

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims





Canless Koto™ Frames & Power Packs

	Description	CAT. #	Specs
	Remodel IC Power Packs Driver specified for 120V (Triac/ELV) or 120/277V (0-10V/Triac/ELV) 2 ½" W - 5 13⁄16" L - 2 ⅛" H -EM on remodel prevents daisy chain	EKCL10RIC	10.5W, 950 lm, 120V, Triac/ELV
		EKCL10RIC-EM1	8W, 90 Min. Battery Backup
		EKCL10RIC-EM2	15W, 90 Min. Battery Backup
		EKCL10RICDX	10.5W, 950 lm, 120-277V, 0-10V/Triac/ELV
		EKCL10RICDX-EM1	8W, 90 Min. Battery Backup
		EKCL10RICDX-EM2	15W, 90 Min. Battery Backup
	New Construction Plaster Frames for Remodel Power Pack (Optional)	E2LKF1	2" Frame. 3" Cutout
		E3LKF1	3" Frame. 3 ⅝" Cutout
		E4LF1	4" Frame. 4 ¼" Cutout
		E6LF1	6" Frame. 6 ¼" Cutout
	Emergency Battery Backup (Optional) 15 ½" L - 2 ⅛" W - 1 ⅝" H	KEM-ERT	120-277V optional 90 min. battery backup

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

2" Pex™ Diecast Trims for Canless Koto™ Module

	Description		CAT. #	Specs
	2" Round Deep Reflector 3 ½" O.D. - 2 ⅛" I.D.	WET LOCATION	EKCL2818W	All White
			EKCL2818BB	All Black
			EKCL2818BZ	All Bronze
			EKCL2818B	Black/White Ring
			EKCL2818H	Haze/White Ring
	2" Round Adjustable Pinhole 3 ½" O.D. - 1 ½" I.D.	DAMP LOCATION	EKCL2827W	All White
			EKCL2827BB	All Black
			EKCL2827BZ	All Bronze
			EKCL2827B	Black/White Ring
	2" Round Adjustable Reflector 3 ½" O.D. - 2 3⁄16" I.D. - 30° tilt	DAMP LOCATION	EKCL2829W	All White
			EKCL2829BB	All Black
			EKCL2829BZ	All Bronze
			EKCL2829B	Black/White Ring
			EKCL2829H	Haze/White Ring
	2" Round Sleek Reflector 3 ½" O.D. - 2 ½" I.D.	WET LOCATION	EKCL2863W	All White
			EKCL2863BB	All Black
	2" Round Sleek Wall Wash Reflector NEW! 3 ½" O.D. - 1 ⅜" I.D.	WET LOCATION	EKCL2883W	All White
			EKCL2883BB	All Black
	2" Round Curved Reflector 3 ½" O.D. - 1 ½" I.D.	WET LOCATION	EKCL2872W	All White
			EKCL2872B	All Black
	2" Round Gimbal 3 ½" O.D. - 1 ½" I.D. - 30° tilt	DAMP LOCATION	EKCL2888W	All White
			EKCL2888B	All Black
			EKCL2888BZ	All Bronze
	2" Square Deep Reflector 3 ½" Sq. - 2 ⅛" I.D.	WET LOCATION	EKCL2518W	All White
			EKCL2518BB	All Black
			EKCL2518B	Black/White Ring
	2" Square Adjustable Reflector 3 ½" Sq. - 2 3⁄16" I.D. - 30° tilt	DAMP LOCATION	EKCL2529W	All White
			EKCL2529BB	All Black
			EKCL2529B	Black/White Ring
	2" Square Reflector 3 ½" Sq. - 1 ⅜" Sq.	WET LOCATION	EKCL2541W	All White
			EKCL2541BB	All Black
			EKCL2541B	Black/White Ring
	2" Square Adjustable Pinhole 3 ½" Sq. - 1 ½" Sq. - 30° tilt	DAMP LOCATION	EKCL2527W	All White
			EKCL2527BB	All Black
			EKCL2527B	Black/White Ring
	2" Square Gimbal 3 ½" Sq. - 1 ½" I.D. - 30° tilt	DAMP LOCATION	EKCL2588W	All White
			EKCL2588B	All Black
			EKCL2588BZ	All Bronze

2" Pex™ Trimless for Canless Koto™ Module

	Description		CAT. #	Specs
	2" Round Adjustable Trimless Reflector 2 ⅝" O.D.	DAMP LOCATION	ELK215W	White
			ELK215B	Black
	2" Round Trimless Spackle Frame 7 " O.D. - 2 ½" I.D.		EL2SFR	For use with ELK215

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

3" Pex™ Diecast Trims for Canless Koto™ Module

	Description		CAT. #	Specs
	3" Round Deep Reflector 4 ⅜" O.D. - 3" I.D.	WET LOCATION	EKCL3618W	All White
			EKCL3618BB	All Black
			EKCL3618BZ	All Bronze
			EKCL3618B	Black/White Ring
			EKCL3618C	Chrome/White Ring
			EKCL3618H	Haze/White Ring
	3" Round Adjustable Reflector 4 ⅜" O.D. - 3" I.D. - 15° - 30° tilt	DAMP LOCATION	EKCL3629W	All White
			EKCL3629BB	All Black
			EKCL3629BZ	All Bronze
			EKCL3629B	Black/White Ring
			EKCL3629C	Chrome/White Ring
			EKCL3629H	Haze/White Ring
	3" Round Adjustable Pinhole 4 ⅜" O.D. - 1 ¾" I.D. - 15° - 30° tilt	DAMP LOCATION	EKCL3627W	All White
			EKCL3627B	Black/White Ring
			EKCL3627H	Haze/White Ring
			EKCL3627BB	All Black
			EKCL3627BZ	All Bronze
	3" Round Adjustable Slot Aperture 4 ⅜" O.D. - 45° tilt	DAMP LOCATION	EKCL3620W	Black Slot/White Ring
	3" Round Adjustable Reflector Wall Wash 4 ⅜" O.D. - 3" I.D. - 45° tilt	DAMP LOCATION	EKCL3622W	All White
	3" Round Sleek Regressed Eyeball 4 ⅜" O.D. - 2 ⅞" I.D. - 15° - 30° tilt	WET LOCATION	EKCL3653W	All White
			EKCL3653BB	All Black
	3" Round Sleek Reflector 4 ⅜" O.D. - 3 ⅜" I.D.	WET LOCATION	EKCL3663W	All White
			EKCL3663BB	All Black
	3" Round Sleek Wall Wash Reflector NEW! 3 ½" O.D. - 1 ⅜" I.D.	WET LOCATION	EKCL3683W	All White
			EKCL3683BB	All Black
	3" Round Curved Reflector 4 ⅜" O.D. - 1 ½" I.D.	WET LOCATION	EKCL3672W	All White
			EKCL3672B	All Black
	3" Round Directional Gimbal 4 ⅜" O.D. - 3" I.D. - 25° tilt	DAMP LOCATION	EKCL3679W	All White
			EKCL3679B	Black/White Ring
			EKCL3679H	Haze/White Ring
			EKCL3679BB	All Black
	3" Round Adjustable Baffle 4 ⅜" O.D. - 3" I.D. - 35° tilt	DAMP LOCATION	EKCL3693W	All White

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

3" Pex™ Diecast Trims for Canless Koto™ Module

	Description		CAT. #	Specs
	3" Square Deep Reflector 4 ⅜" Sq. - 3" I.D.	WET LOCATION	EKCL3318W	All White
			EKCL3318B	Black/White Ring
			EKCL3318BB	All Black
			EKCL3318BZ	All Bronze
			EKCL3318C	Chrome/White Ring
			EKCL3318H	Haze/White Ring
	3" Square Adjustable Reflector 4 ⅜" Sq. - 3" I.D. - 15° - 30° tilt	DAMP LOCATION	EKCL3329W	All White
			EKCL3329BB	All Black
			EKCL3329BZ	All Bronze
			EKCL3329B	Black/White Ring
			EKCL3329C	Chrome/White Ring
			EKCL3329H	Haze/White Ring
	3" Square Adjustable Reflector Wall Wash 4 ⅜" Sq. - 3" I.D. - 35° tilt	DAMP LOCATION	EKCL3322W	All White
	3" Square Adjustable Pinhole 4 ⅜" Sq. - 2" Sq. - 15° - 30° tilt	DAMP LOCATION	EKCL3327W	All White
			EKCL3327B	Black/White Ring
			EKCL3327H	Haze/White Ring
			EKCL3327BB	All Black
			EKCL3327BZ	All Bronze
	3" Square Reflector 4 ⅜" Sq. - 2" Sq.	WET LOCATION	EKCL3341W	All White
			EKCL3341B	Black/White Ring
			EKCL3341BB	All Black
			EKCL3341BZ	All Bronze
	3" Square Adjustable Baffle 4 ⅜" Sq. - 3" I.D. - 35° tilt	DAMP LOCATION	EKCL3393W	All White

3" Pex™ Flush Mount Trim Adapters for Canless Koto™ Trims

	Description	CAT. #	Specs
	3" Round Flush Mount Trim Adaptor 7 ⅛" O.D. - 4 ⅜" I.D.	EL3FMR	For 3" Pex Round Trims
	3" Square Flush Mount Trim Adaptor 7 ⅛" Sq. - 4 ⅜" Sq.	EL3FMS	For 3" Pex Square Trims

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

3" Pex™ Trimless for Canless Koto™ Module

	Description		CAT. #	Specs
	3" Round Trimless Reflector 3" O.D.	WET LOCATION	ELK308W	White
			ELK308B	Black
			ELK308H	Haze
	3" Round Adjustable Trimless Reflector 3" O.D. - 35° tilt	DAMP LOCATION	ELK315W	White
			ELK315B	Black
			ELK315H	Haze
	3" Round Trimless Spackle Frame 7" O.D. - 3" I.D.		EL3SFR	For use with ELK308 & ELK315
	3" Round Trimless Wood Ceiling Ring 3 ⅛" O.D.		EL3WCARD	For use with ELK308 & ELK315
	3" Round Knife Edge Wood Ceiling Trim with Mounting Clips 3 ⅞" O.D. - 3 ⅜" I.D.		EL3WCRW	White, for use with ELK308 & ELK315
			EL3WCRB	Black, for use with ELK308 & ELK315
	3" Square Trimless Reflector 2 ⅜" Sq.	WET LOCATION	ELK370W	White
			ELK370B	Black
			ELK370H	Haze
	3" Square Adjustable Trimless Reflector 2 ⅜" Sq. - 35° tilt	DAMP LOCATION	ELK381W	White
			ELK381B	Black
			ELK381H	Haze
	3" Square Trimless Spackle Frame 5 ⅞" Sq. - 2 ½" Sq.		EL03SFS	For use with ELK370 & ELK381

4" Pex™ Diecast Trims for Canless Koto™ Module

	Description		CAT. #	Specs
	4" Round Shallow Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	EKCL4116W	All White
			EKCL4116H	Haze/White Ring
	4" Round Deep Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	EKCL4118W	All White
			EKCL4118BB	All Black
			EKCL4118BZ	All Bronze
			EKCL4118B	Black/White Ring
			EKCL4118C	Chrome/White Ring
			EKCL4118H	Haze/White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Canless Koto™ Module

	Description		CAT. #	Specs
	4" Round Adjustable Reflector 5" O.D. - 4" I.D. - 25° - 35° tilt	DAMP LOCATION	EKCL4129W	All White
			EKCL4129BB	All Black
			EKCL4129BZ	All Bronze
			EKCL4129B	Black/White Ring
			EKCL4129C	Chrome/White Ring
			EKCL4129H	Haze/White Ring
	4" Round Adjustable Reflector with Clear Glass Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	WET LOCATION	EKCL4111W	All White
			EKCL4111BB	All Black
			EKCL4111BZ	All Bronze
			EKCL4111B	Black/White Ring
			EKCL4111C	Chrome/White Ring
			EKCL4111H	Haze/White Ring
	4" Round Adjustable Reflector with Frosted Lens 5" O.D. - 4" I.D. - 25° - 35° tilt	WET LOCATION	EKCL4112W	All White
			EKCL4112BB	All Black
			EKCL4112BZ	All Bronze
			EKCL4112B	Black/White Ring
	4" Round Slot Aperture 5" O.D. - 2 ⅜" I.D. - 45° tilt	DAMP LOCATION	EKCL4130W	Black Slot/White Ring
	4" Round Adjustable Wall Wash 5" O.D. - 3 ¾" I.D. - 45° tilt	DAMP LOCATION	EKCL4122W	All White
	4" Round Adjustable Pinhole 5" O.D. - 2" I.D. - 25° - 35° tilt	DAMP LOCATION	EKCL4127W	All White
			EKCL4127BB	All Black
			EKCL4127BZ	All Bronze
			EKCL4127B	Black/White Ring
			EKCL4127H	Haze/White Ring
	4" Round Adjustable Pinhole with Frosted Lens 5" O.D. - 2" I.D. - 25° - 35° tilt	WET LOCATION	EKCL4125W	All White
			EKCL4125BB	All Black
			EKCL4125BZ	All Bronze
			EKCL4125B	Black/White Ring
			EKCL4125H	Haze/White Ring
	4" Round Sleek Regressed Eyeball 5" O.D. - 3 ½" I.D. - 15° - 30° tilt	WET LOCATION	EKCL4153W	All White
			EKCL4153BB	All Black
			EKCL4153B	Black/White Ring
	4" Round Sleek Reflector 5" O.D. - 3 ⅞" I.D.	WET LOCATION	EKCL4163W	All White
			EKCL4163BB	All Black
	4" Round Sleek Wall Wash Reflector 5" O.D. - 3 ½" I.D.	WET LOCATION	EKCL4183W	All White
			EKCL4183BB	All Black

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Diecast Trims for Canless Koto™ Module

	Description		CAT. #	Specs
	4" Round Curved Reflector 5" O.D. - 1 ½" I.D.	WET LOCATION	EKCL4172W	All White
			EKCL4172B	All Black
	4" Round Directional Gimbal 5" O.D. - 3 ½" I.D. - 25° tilt	DAMP LOCATION	EKCL4179W	All White
			EKCL4179BB	All Black
			EKCL4179B	Black/White Ring
			EKCL4179H	Haze/White Ring
	4" Round Adjustable Spot 5" O.D. - 25° tilt	DAMP LOCATION	EKCL4188W	All White
			EKCL4188B	All Black
			EKCL4188BZ	All Bronze
	4" Round Adjustable Baffle 5" O.D. - 4" I.D. - 35° tilt	DAMP LOCATION	EKCL4193W	All White
			EKCL4193BB	All Black
			EKCL4193B	Black/White Ring
	4" Square Shallow Reflector 5" Sq. - 3 ⅝" I.D.	WET LOCATION	EKCL4216W	All White
			EKCL4216H	Haze/White Ring
	4" Square Deep Reflector 5" Sq. - 3 ¾" I.D.	WET LOCATION	EKCL4218W	All White
			EKCL4218B	Black/White Ring
			EKCL4218BB	All Black
			EKCL4218BZ	All Bronze
			EKCL4218C	Chrome/White Ring
			EKCL4218H	Haze/White Ring
	4" Square Adjustable Pinhole 5" Sq. - 2 ½" Sq. - 25° - 35° tilt	DAMP LOCATION	EKCL4227W	All White
			EKCL4227BB	All Black
			EKCL4227BZ	All Bronze
			EKCL4227B	Black/White Ring
			EKCL4227H	Haze/White Ring
	4" Square Adjustable Pinhole with Frosted Lens 5" Sq. - 2 ½" Sq. - 25° - 35° tilt	WET LOCATION	EKCL4212W	All White
			EKCL4212BB	All Black
			EKCL4212BZ	All Bronze
			EKCL4212B	Black/White Ring
	4" Square Adjustable Reflector 5" Sq. - 3 ⅝" I.D. - 25° - 35° tilt	DAMP LOCATION	EKCL4229W	All White
			EKCL4229BB	All Black
			EKCL4229BZ	All Bronze
			EKCL4229B	Black/White Ring
			EKCL4229C	Chrome/White Ring
			EKCL4229H	Haze/White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



93+ CRI · IC RATED · IN TODAY OUT TODAY · 50K HRS 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE


4" Pex™ Diecast Trims for Canless Koto™ Module

	Description		CAT. #	Specs
	4" Square Adjustable Wall Wash 5" Sq. - 3 ¾" I.D. - 45° tilt	DAMP LOCATION	EKCL4222W	White Ring
	4" Square Adjustable Reflector 5" Sq. - 2 ⅝" Sq. - 35° tilt	DAMP LOCATION	EKCL4282W	All White
			EKCL4282BZ	All Bronze
	4" Square Adjustable Baffle 5" Sq. - 3 ⅝" Sq. - 35° tilt	DAMP LOCATION	EKCL4284W	All White
			EKCL4284B	All Black
			EKCL4284BZ	All Bronze

4" Pex™ Flush Mount Trim Adapters for Canless Koto™ Trims

	Description	CAT. #	Specs
	4" Round Spackle Frame 7 ⅛" O.D. - 5" I.D.	EL4FMR	For EKCL4116, EKCL4118, EKCL4127, EKCL4129, EKCL4710, EKCL4713, EKCL4715
	4" Square Spackle Frame 7 ⅛" Sq. - 4 ⅜" Sq.	EL4FMS	For EKCL4216, EKCL4218, EKCL4227, EKCL4229

4" Pex™ Trimless for Canless Koto™ Module

	Description		CAT. #	Specs
	4" Round Fixed Trimless Reflector 4" O.D.	WET LOCATION	ELK408W	White
			ELK408B	Black
			ELK408H	Haze
			ELK408BZ	Bronze
	4" Round Adjustable Trimless Reflector 4" O.D. - 35° tilt	DAMP LOCATION	ELK415W	White
			ELK415B	Black
			ELK415H	Haze
			ELK415BZ	Bronze
	4" Round Trimless Spackle Frame 7 ⅛" O.D. - 4" I.D.		EL4SFR	For use with ELK408 and ELK415
	4" Square Trimless Reflector 3 ¼" Sq.	WET LOCATION	ELK445W	White
			ELK445B	Black
	4" Square Adjustable Trimless Reflector 3 ¼" Sq. - 35° tilt	DAMP LOCATION	ELK459W	White
			ELK459B	Black
			ELK459H	Haze
	4" Square Trimless Spackle Frame 6 ¼" Sq. - 3 ⅛" Sq.		EL4SFS	For use with ELK445 and ELK459

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com


The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

4" Unique™ Trims for Canless Koto™ Module

	Description		CAT. #	Specs
	4" Round Adjustable Reflector 5" O.D. - 3 ⅞" I.D. - 25° - 35° tilt	DAMP LOCATION	EKCL4710W	All White
	4" Round Adjustable Deep Reflector	DAMP LOCATION	EKCL4717W	All White
	4" Round Adjustable Baffle 5" O.D. - 3 ⅞" I.D. - 25° - 35° tilt	DAMP LOCATION	EKCL4713W	All White
	4" Square Reflector 4 ½" Sq. - 2 ¾" Sq.	WET LOCATION	EKCL4714W	All White
	4" Square Baffle 4 ⅝" Sq. - 2 ⅞" Sq.	WET LOCATION	EKCL4716W	All White

4" Flexa™ Trims for Canless Koto™ Module

	Description		CAT. #	Specs
	4" Round Adjustable Reflector 5" O.D. - 3 ⅛" I.D. - 35° tilt	DAMP LOCATION	EKCL4721WW	All White
			EKCL4721BB	All Black
			EKCL4721BZBZ	All Bronze
			EKCL4721BW	Black Ref./White Ring
			EKCL4721CW	Chrome Ref./White Ring
			EKCL4721HW	Haze Ref./White Ring
	4" Square Reflector 4 ¾" Sq. - 2 ⅜" Sq.	WET LOCATION	EKCL4741WW	All White
			EKCL4741BB	All Black
			EKCL4741BZBZ	All Bronze
			EKCL4741BW	Black Ref./White Ring
			EKCL4741HW	Haze Ref./White Ring
	4" Adjustable Square Reflector 4 ¾" Sq. - 2 ⅜" Sq. - 35° tilt	DAMP LOCATION	EKCL4759WW	All White
			EKCL4759BB	All Black
			EKCL4759B	Black Ref./White Ring
			EKCL4759H	Haze Ref./White Ring

The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims



93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

4" Pex™ Universal Sloped Ceiling Trims for Canless Koto™ Module

	Description		CAT. #	Specs
	4" Round Universal Sloped Ceiling Reflector 5" O.D. - 3 5⁄8" I.D.	DAMP LOCATION	EKCL4357W	All White
			EKCL4357BB	All Black
			EKCL4357BZ	All Bronze
			EKCL4357B	Black/White Ring
			EKCL4357H	Haze/White Ring
	4" Round Universal Sloped Ceiling Reflector with Clear Glass 5" O.D. - 3 5⁄8" I.D.	WET LOCATION	EKCL4347W	All White
			EKCL4347BB	All Black
			EKCL4347BZ	All Bronze
			EKCL4347B	Black/White Ring
			EKCL4347H	Haze/White Ring

6" Pex™ Trims for Canless Koto™ Module

	Description		CAT. #	Specs
	6" Round Reflector 7 ½" O.D. - 6" I.D.	WET LOCATION	EKCL6418W	All White
			EKCL6418BB	All Black
			EKCL6418BZ	All Bronze
			EKCL6418H	Haze Ref./White Ring
	6" Round Adjustable Reflector 7 ½" O.D. - 6" I.D. - 30° tilt	WET LOCATION	EKCL6429W	All White
			EKCL6429BB	All Black
			EKCL6429BZ	All Bronze
			EKCL6429H	Haze Ref./White Ring
	6" Round Adjustable Pinhole Reflector 8" O.D. - 1 3⁄4" I.D. - 25° tilt	DAMP LOCATION	EKCL6427W	All White
			EKCL6427B	Black Ref./White Ring
	6" Square Adjustable Reflector 6 3⁄4" Sq. - 4 1⁄4" Sq.	WET LOCATION	EKCL6829W	All White
			EKCL6829BB	All Black
			EKCL6829H	Haze Ref./White Ring



The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims






Accessories Field Changeable

Description		CAT. #	Specs
	Field Changeable Lens	EP731C	18° Lens
		EP732C	25° Lens
		EP733C	38° Lens
		EP734C	60° Lens
		EP739C	90° Lens
	Field Changeable Reflectors	EP735C	15° Reflector
		EP736C	25° Reflector
		EP737C	38° Reflector
		EP738C	60° Reflector
	Field Changeable Secondary Optic Hex Louver	L45	Black, for a better glare shield
		L57	White, for a better glare shield
	Field Changeable Secondary Optic Linear	L46	For a wide rectangular illumination pattern
	Field Changeable Secondary Optic Spread	L47	For a symmetrical broadening of light beams
	Field Changeable Secondary Optic Frosted Diffuser	L49	For a frosted lens look
	Field Changeable Secondary Optic Color Shifter	L51	For a reduced color temperature
	Field Changeable Secondary Optic Color Lens	L52	Blue lens
		L53	Pink lens
	Asymmetric Lens	L54	Single elliptical illumination pattern
		L55	Double elliptical illumination pattern for accent lighting
	Snoot for Koto™ Modules	L50W	White
		L50B	Black
	Hard Wire Adapter	PSA38	Hard wire adapter to male Quick Connect terminal
	4" Hard Wire Adapter	PSA38-4	4" Hard Wire Adapter to male Quick
	Rewiring Kit	PSA38-22	22" Rewiring Kit to male Quick Connect terminal.

Commercial Koto™ MAX LED Fixture

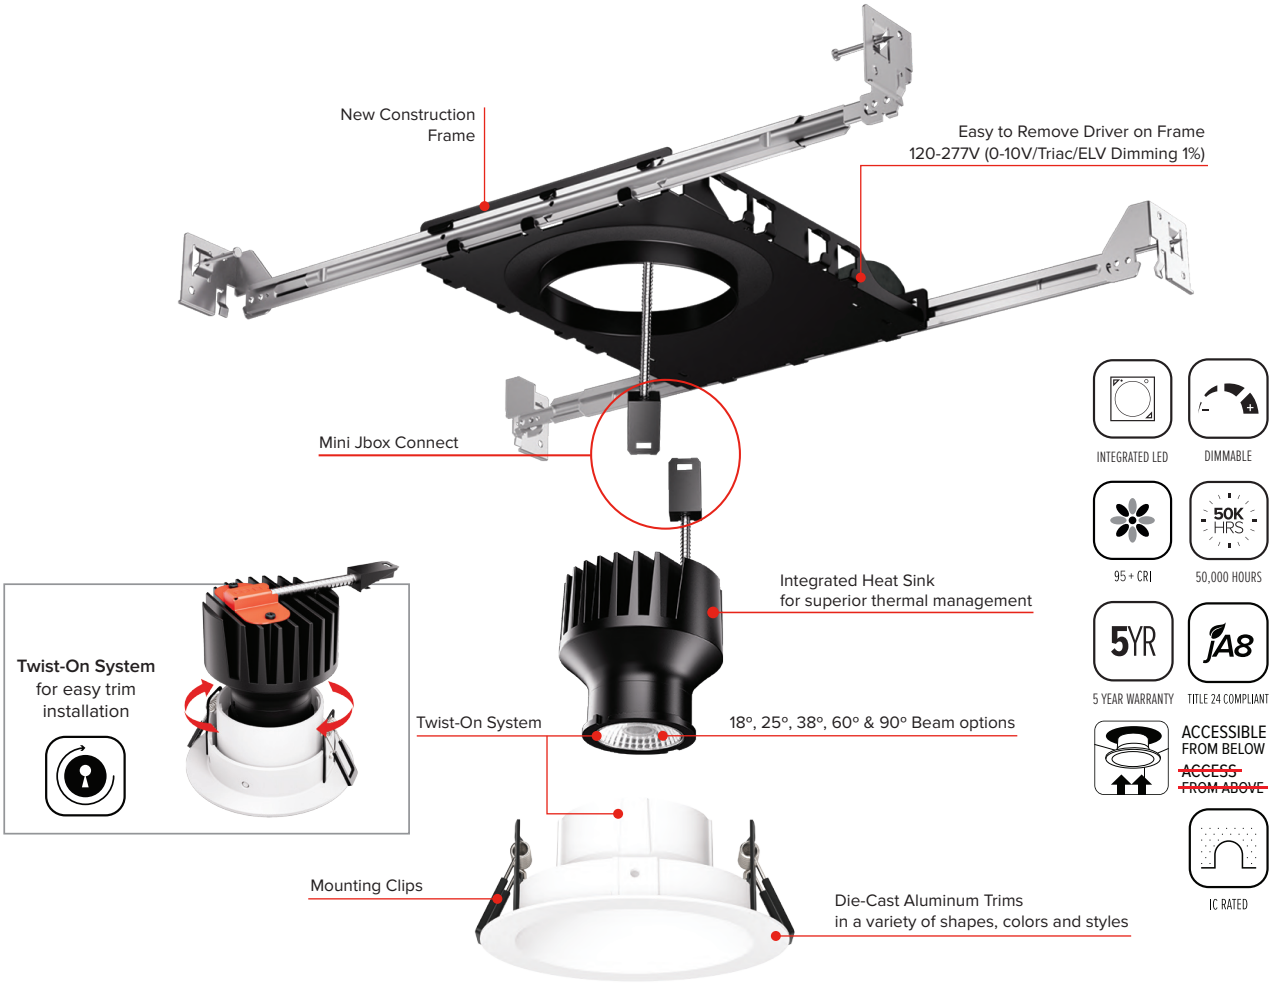

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
2″ 3″ 4″ 6″	Round (Reflector, Baffle, Adjustable, Pinhole, Slot Aperture, and Wall Wash) Square (Reflector, Adjustable, Pinhole, Slot Aperture, and Wall Wash) Trimless (Round and Square)	White, Black, Bronze, Black White Ring, Haze White Ring, Chrome White Ring	750 lm - 3500 lm	2700K - 4000K

Covered by U.S. PATENTS and Patents Pending

The Koto™ MAX **System**

1 ½" Commercial Module with Twist-On Trims

INTEGRATED LED · TWIST-ON · 95+ CRI · IC RATED · 5 YEAR WARRANTY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE · ACCESSIBLE FROM BELOW ~~ACCESS FROM ABOVE~~

NEW! Koto™ MAX LED Commercial Module



- The high quality commercial grade downlight engineered to be shallow, taking less space than a regular recessed housing.
- **ECKT35 module** works with all Koto™ MAX frames & trims, for all sizes & lumen outputs
- 1 ½" Aperture - 3 ¼" Height
- Includes Standard 38° lens installed, with field changeable 25° and 60° lenses Included. Optional: 18° and 90° lenses available
- Color temperature range options of 2700K, 3000K, 3500K and 4000K.


Koto™ MAX Module Product Number Builder

Module		Color Temperature		Beam Angle	
ECKT35[1]	Koto™ Max Module	**27D**	2700K	**(Blank)**	38°
		30D	3000K	**-S**	18°
		35D	3500K	**-N**	25°
		40D	4000K	**-W**	60°
				-E	90°

Example: **ECKT3530D** [Koto™ MAX Module, 3000K, 38° Beam Angle]

[1] 38° installed on module with 25° & 60° included in the box.

NEW! Koto™ MAX New Construction Frames and Remodel/Retrofit



Plaster Frame
Available in 2", 3", 4", and 6"



Architectural Frame
Available in 2", 3", 4", and 6"



Remodel/Retrofit
-EM on remodel prevents daisy chain

Koto™ MAX Frame Product Number Builder

Style/Size		Frame		Lumens/Wattage		Voltage/Dimming		EM Optional	
E2CKT	2" New Construction	**(Blank)**[2]	Plaster Frame	**07**[4]	750 lm (6W)	**DX**	120-277V, 0-10V/Triac/ELV (1%)	**(Blank)**	No EM
E3CKT	3" New Construction	**AF**[3]	Architectural Frame	**10**[4]	1000 lm (8W)	**DAL**[6]	120-277V, eldoLED DALI-2 DT8 (0.1%)	**-EM**[7]	25W, 90 min battery backup
E4CKT	4" New Construction			**12**[4]	1250 lm (11W)			**-EM1**	8W, 90 min battery backup
E6CKT	6" New Construction			**15**[4]	1500 lm (14W)	**LAN**	Lutron Athena Wireless Node	**-EM2**	15W, 90 min battery backup
ECKTRM[1]	Remodel/Retrofit			**20**[5]	2000 lm (19W)				
				25[5]	2500 lm (23W)				
				30[5]	3000 lm (29W)				
				35[5]	3500 lm (32W)				

Example: **E2CKT12DX** [Koto™ MAX 2" New Construction, Plaster Frame, 1250 lumens, 120-277V,0-10V/Triac/ELV (1%)]

[1] Remodel is available up to 2500 lm, works with all size trims, no frame.
[2] Includes Hanger Bars
[3] Hanger bars ordered separately. FB27 - 27" Flat bars for wood construction. CH26 - 26" C-Channel bars for T-Bar ceiling.
[4] IC rated for direct contact with insulation, cUL up to 1500 lumens (14W). [5] Non IC, for use without insulation, or keep insulation 3" away from fixture. 2000 (19W) - 3500 (32W) lumens.
[6] DALI-2 DT8, E2CKT (2" frame) option is only available up to 2500 lm
[7] Cannot be used with 30 (29W) and 35 (32W) Lumen options.

The Koto™ MAX **System**

1 ½" Commercial Module with Twist-On Trims

INTEGRATED LED · TWIST-ON · 95+ CRI · IC RATED · 5 YEAR WARRANTY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE · ACCESSIBLE FROM BELOW ~~ACCESS FROM ABOVE~~

2" Pex™ Canless Diecast Trims for Koto™ MAX Module

	Description		CAT. #	Specs
	2" Round Deep Reflector 3 ½" O.D. - 2 ⅛" I.D.	WET LOCATION	EKCL2818W	All White
			EKCL2818BB	All Black
			EKCL2818BZ	All Bronze
			EKCL2818B	Black/White Ring
			EKCL2818H	Haze/White Ring
	2" Round Adjustable Pinhole 3 ½" O.D. - 1 ½" I.D. - 30° tilt	DAMP LOCATION	EKCL2827W	All White
			EKCL2827BB	All Black
			EKCL2827BZ	All Bronze
			EKCL2827B	Black/White Ring
	2" Round Adjustable Reflector 3 ½" O.D. - 2 ⅜" I.D. - 30° tilt	DAMP LOCATION	EKCL2829W	All White
			EKCL2829BB	All Black
			EKCL2829BZ	All Bronze
			EKCL2829B	Black/White Ring
			EKCL2829H	Haze/White Ring
	2" Round Sleek Reflector 3 ½" O.D. - 2 ½" I.D.	WET LOCATION	EKCL2863W	All White
			EKCL2863BB	All Black
	2" Round Sleek Wall Wash Reflector 3 ½" O.D. - 1 ⅜" I.D.	WET LOCATION	EKCL2883W	All White
			EKCL2883BB	All Black
	2" Round Curved Reflector 3 ½" O.D. - 1 ½" I.D.	WET LOCATION	EKCL2872W	All White
			EKCL2872B	All Black
	2" Square Deep Reflector 3 ½" Sq. - 2 ⅛" I.D.	WET LOCATION	EKCL2518W	All White
			EKCL2518BB	All Black
			EKCL2518B	Black/White Ring
	2" Square Adjustable Reflector 3 ½" Sq. - 2 ⅜" I.D. - 30° tilt	DAMP LOCATION	EKCL2529W	All White
			EKCL2529BB	All Black
			EKCL2529B	Black/White Ring
	2" Square Reflector 3 ½" Sq. - 1 ⅜" Sq.	WET LOCATION	EKCL2541W	All White
			EKCL2541BB	All Black
			EKCL2541B	Black/White Ring
	2" Square Adjustable Pinhole 3 ½" Sq. - 1 ½" Sq. - 30° tilt	DAMP LOCATION	EKCL2527W	All White
			EKCL2527BB	All Black
			EKCL2527B	Black/White Ring

The Koto™ MAX **System**

1 ½" Commercial Module with Twist-On Trims

INTEGRATED LED · TWIST-ON · 95+ CRI · IC RATED · 5 YEAR WARRANTY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE · ACCESSIBLE FROM BELOW ~~ACCESS FROM ABOVE~~

3" Pex™ Canless Diecast Trims for Koto™ MAX Module

Description		CAT. #	Specs
	3" Round Deep Reflector 4 ⅜" O.D. - 3" I.D. WET LOCATION	EKCL3618W	All White
		EKCL3618BB	All Black
		EKCL3618BZ	All Bronze
		EKCL3618B	Black/White Ring
		EKCL3618C	Chrome/White Ring
		EKCL3618H	Haze/White Ring
	3" Round Adjustable Reflector 4 ⅜" O.D. - 3" I.D. - 30° tilt DAMP LOCATION	EKCL3629W	All White
		EKCL3629BB	All Black
		EKCL3629BZ	All Bronze
		EKCL3629B	Black/White Ring
		EKCL3629C	Chrome/White Ring
		EKCL3629H	Haze/White Ring
	3" Round Adjustable Pinhole 4 ⅜" O.D. - 1 ¾" I.D. - 30° tilt DAMP LOCATION	EKCL3627W	All White
		EKCL3627BB	All Black
		EKCL3627BZ	All Bronze
		EKCL3627B	Black/White Ring
	3" Round Adjustable Slot Aperture 4 ⅜" O.D. - 45° tilt DAMP LOCATION	EKCL3620W	Black Slot/White Ring
	3" Round Adjustable Reflector Wall Wash 4 ⅜" O.D. - 3" I.D. - 45° tilt DAMP LOCATION	EKCL3622W	All White
	3" Round Curved Reflector 4 ⅜" O.D. - 1 ½" I.D. WET LOCATION	EKCL3672W	All White
		EKCL3672B	All Black
	3" Round Directional Gimbal 4 ⅜" O.D. - 3" I.D. - 25° tilt DAMP LOCATION	EKCL3679W	All White
		EKCL3679B	Black/White Ring
		EKCL3679H	Haze/White Ring
		EKCL3679BB	All Black

The Koto™ MAX **System**

1 ½" Commercial Module with Twist-On Trims

INTEGRATED LED · TWIST-ON · 95+ CRI · IC RATED · 5 YEAR WARRANTY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE · ACCESSIBLE FROM BELOW ~~ACCESS FROM ABOVE~~

3" Pex™ Canless Diecast Trims for Koto™ MAX Module

	Description		CAT. #	Specs
	3" Round Sleek Reflector 4 ⅜" O.D. - 3 ⅜" I.D.	WET LOCATION	EKCL3663W	All White
			EKCL3663BB	All Black
	3" Round Sleek Lensed Wall Wash Reflector 3 ½" O.D. - 1 ⅜" I.D.	WET LOCATION	EKCL3683W	All White
			EKCL3683BB	All Black
	3" Square Deep Reflector 4 ⅜" Sq. - 3" I.D.	WET LOCATION	EKCL3318W	All White
			EKCL3318B	Black/White Ring
			EKCL3318BB	All Black
			EKCL3318BZ	All Bronze
			EKCL3318C	Chrome/White Ring
			EKCL3318H	Haze/White Ring
	3" Square Adjustable Reflector 4 ⅜" Sq. - 3" I.D. - 30° tilt	DAMP LOCATION	EKCL3329W	All White
			EKCL3329BB	All Black
			EKCL3329BZ	All Bronze
			EKCL3329B	Black/White Ring
			EKCL3329C	Chrome/White Ring
			EKCL3329H	Haze/White Ring
	3" Square Adjustable Reflector Wall Wash 4 ⅜" Sq. - 3" I.D. - 45° tilt	DAMP LOCATION	EKCL3322W	All White
	3" Square Adjustable Pinhole 4 ⅜" Sq. - 2" Sq. - 30° tilt	DAMP LOCATION	EKCL3327W	All White
			EKCL3327B	Black/White Ring
			EKCL3327BB	All Black
			EKCL3327BZ	All Bronze
	3" Square Reflector 4 ⅜" Sq. - 2" Sq.	WET LOCATION	EKCL3341W	All White
			EKCL3341B	Black/White Ring
			EKCL3341BB	All Black
			EKCL3341BZ	All Bronze

The Koto™ MAX **System**

1 ½" Commercial Module with Twist-On Trims

INTEGRATED LED · TWIST-ON · 95+ CRI · IC RATED · 5 YEAR WARRANTY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE · ACCESSIBLE FROM BELOW ~~ACCESS FROM ABOVE~~

3" Pex™ Flush Mount Trim Adapters for Koto™ MAX Trims

	Description	CAT. #	Specs
	3" Round Flush Mount Spackle Frame 7 ⅛" O.D. - 4 ⅜" I.D.	EL3FMR	For 3" Pex Round Trims
	3" Square Flush Mount Spackle Frame 7 ⅛" Sq. - 4 ⅜" Sq.	EL3FMS	For 3" Pex Square Trims

3" Pex™ Diecast Trimless for Koto™ MAX Module

	Description		CAT. #	Specs
	3" Round Trimless Reflector 3" O.D.	WET LOCATION	ELK308W	White
			ELK308B	Black
			ELK308H	Haze
	3" Round Adjustable Trimless Reflector 3" O.D. - 35° tilt	DAMP LOCATION	ELK315W	White
			ELK315B	Black
			ELK315H	Haze
	3" Round Trimless Spackle Frame 7" O.D. - 3" I.D.		EL3SFR	For use with ELK308 and ELK315
	3" Round Knife Edge Wood Ceiling Trim with Mounting Clips 3 ⅞" O.D. - 3 3/16" I.D.		EL3WCRW	White, for use with ELK308 and ELK315
			EL3WCRB	Black, for use with ELK308 and ELK315
	3" Trimless Wood Ceiling Ring 5 ⅜" W - 3 ⅛" I.D.		EL3WCARD	For use with ELK308 and ELK315

The Koto™ MAX **System**

1 ½" Commercial Module with Twist-On Trims

INTEGRATED LED · TWIST-ON · 95+ CRI · IC RATED · 5 YEAR WARRANTY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE · ACCESSIBLE FROM BELOW ~~ACCESS FROM ABOVE~~

4" Pex™ Canless Diecast Trims for Koto™ MAX Module

	Description		CAT. #	Specs
	4" Round Shallow Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	EKCL4116W	All White
			EKCL4116H	Haze/White Ring
	4" Round Deep Reflector 5" O.D. - 3 ⅝" I.D.	WET LOCATION	EKCL4118W	All White
			EKCL4118BB	All Black
			EKCL4118BZ	All Bronze
			EKCL4118B	Black/White Ring
			EKCL4118C	Chrome/White Ring
			EKCL4118H	Haze/White Ring
	4" Round Adjustable Reflector 5" O.D. - 4" I.D. - 35° tilt	DAMP LOCATION	EKCL4129W	All White
			EKCL4129BB	All Black
			EKCL4129BZ	All Bronze
			EKCL4129B	Black/White Ring
			EKCL4129C	Chrome/White Ring
			EKCL4129H	Haze/White Ring
	4" Round Adjustable Reflector with Clear Glass Lens 5" O.D. - 4" I.D. - 35° tilt	WET LOCATION	EKCL4111W	All White
			EKCL4111BB	All Black
			EKCL4111BZ	All Bronze
			EKCL4111B	Black/White Ring
			EKCL4111C	Chrome/White Ring
			EKCL4111H	Haze/White Ring
	4" Round Adjustable Reflector with Frosted Lens 5" O.D. - 4" I.D. - 35° tilt	WET LOCATION	EKCL4112W	All White
			EKCL4112BB	All Black
			EKCL4112BZ	All Bronze
			EKCL4112B	Black/White Ring
			EKCL4112C	Chrome/White Ring
			EKCL4112H	Haze/White Ring
	4" Round Slot Aperture 5" O.D. - 2 ⅜" I.D. - 45° tilt	DAMP LOCATION	EKCL4130W	Black Slot/White Ring
	4" Round Adjustable Wall Wash 5" O.D. - 3 ¾" I.D. - 45° tilt	DAMP LOCATION	EKCL4122W	All White
	4" Round Adjustable Pinhole 5" O.D. - 2" I.D. - 35° tilt	DAMP LOCATION	EKCL4127W	All White
			EKCL4127BB	All Black
			EKCL4127BZ	All Bronze
			EKCL4127B	Black/White Ring
			EKCL4127H	Haze/White Ring
	4" Round Adjustable Pinhole with Frosted Lens 5" O.D. - 2" I.D. - 35° tilt	WET LOCATION	EKCL4125W	All White
			EKCL4125BB	All Black
			EKCL4125BZ	All Bronze
			EKCL4125B	Black/White Ring
			EKCL4125H	Haze/White Ring

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Koto™ MAX **System**

1 ½" Commercial Module with Twist-On Trims

INTEGRATED LED · TWIST-ON · 95+ CRI · IC RATED · 5 YEAR WARRANTY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE · ACCESSIBLE FROM BELOW ~~ACCESS FROM ABOVE~~

4" Pex™ Canless Diecast Trims for Koto™ MAX Module

	Description		CAT. #	Specs
	4" Round Curved Reflector 5" O.D. - 1 ½" I.D.	WET LOCATION	EKCL4172W	All White
			EKCL4172B	All Black
	4" Round Directional Gimbal 5" O.D. - 3 ½" I.D. - 25° tilt	DAMP LOCATION	EKCL4179W	All White
			EKCL4179BB	All Black
			EKCL4179B	Black/White Ring
			EKCL4179H	Haze/White Ring
	4" Round Adjustable Spot 5" O.D. - 3 ⅝" I.D. - 25° tilt	DAMP LOCATION	EKCL4188W	All White
			EKCL4188B	All Black
			EKCL4188BZ	All Bronze
	4" Square Shallow Reflector 5" Sq. - 3 ⅝" I.D.	WET LOCATION	EKCL4216W	All White
			EKCL4216H	Haze/White Ring
	4" Square Deep Reflector 5" Sq. - 3 ¾" I.D.	WET LOCATION	EKCL4218W	All White
			EKCL4218B	Black/White Ring
			EKCL4218BB	All Black
			EKCL4218BZ	All Bronze
			EKCL4218C	Chrome/White Ring
			EKCL4218H	Haze/White Ring
	4" Square Adjustable Pinhole 5" Sq. - 2 ½" Sq. - 35° tilt	DAMP LOCATION	EKCL4227W	All White
			EKCL4227BB	All Black
			EKCL4227BZ	All Bronze
			EKCL4227B	Black/White Ring
			EKCL4227H	Haze/White Ring
	4" Square Adjustable Pinhole with Frosted Lens 5" Sq. - 2 ½" Sq. - 35° tilt	WET LOCATION	EKCL4212W	All White
			EKCL4212BB	All Black
			EKCL4212BZ	All Bronze
			EKCL4212B	Black/White Ring
			EKCL4212H	Haze/White Ring
	4" Square Adjustable Reflector 5" Sq. - 3 ⅝" I.D. - 25° - 35° tilt	DAMP LOCATION	EKCL4229W	All White
			EKCL4229BB	All Black
			EKCL4229BZ	All Bronze
			EKCL4229B	Black/White Ring
			EKCL4229C	Chrome/White Ring
			EKCL4229H	Haze/White Ring

The Koto™ MAX **System**

1 ½″ Commercial Module with Twist-On Trims

INTEGRATED LED · TWIST-ON · 95+ CRI · IC RATED · 5 YEAR WARRANTY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE · ACCESSIBLE FROM BELOW ~~ACCESS FROM ABOVE~~

4″ Pex™ Canless Diecast Trims for Koto™ MAX Module

	Description		CAT. #	Specs
	4″ Round Sleek Reflector 5″ O.D. - 3 ⅞″ I.D.	WET LOCATION	EKCL4163W	All White
			EKCL4163BB	All Black
	4″ Round Sleek Wall Wash Reflector 5″ O.D. - 3 ½″ I.D.	WET LOCATION	EKCL4183W	All White
			EKCL4183BB	All Black

4″ Flexa™ Canless Trims for Koto™ MAX Module

	Description		CAT. #	Specs
	4″ Square Reflector 4 ¾″ Sq. - 2 ⅜″ Sq.	WET LOCATION	EKCL4741WW	All White
			EKCL4741BB	All Black
			EKCL4741BZBZ	All Bronze
			EKCL4741BW	Black Ref./White Ring
			EKCL4741HW	Haze Ref./White Ring
	4″ Adjustable Square Reflector 4 ¾″ Sq. - 2 ⅜″ Sq. - 35° tilt	DAMP LOCATION	EKCL4759WW	All White
			EKCL4759BB	All Black
			EKCL4759B	Black Ref./White Ring
			EKCL4759H	Haze Ref./White Ring

The Koto™ MAX **System**


1 ½" Commercial Module with Twist-On Trims

INTEGRATED LED · TWIST-ON · 95+ CRI · IC RATED · 5 YEAR WARRANTY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE · ACCESSIBLE FROM BELOW ~~ACCESS FROM ABOVE~~

4" Pex™ Flush Mount Trim Adapters for Koto™ MAX Trims

	Description	CAT. #	Specs
	4" Round Flush Mount Spackle Frame 7 ⅛" O.D. - 5" I.D.	EL4FMR	For EKCL4111, EKCL4112, EKCL4125, EKCL4116, EKCL4118, EKCL4127, EKCL4129, EKCL4710, EKCL4713, EKCL4715
	4" Square Flush Mount Spackle Frame 7 ⅛" Sq. - 4 ⅜" Sq.	EL4FMS	For EKCL4212, EKCL4216, EKCL4218, EKCL4227, EKCL4229

4" Pex™ Trimless for Koto™ MAX Module

	Description		CAT. #	Specs
	4" Round Non-Adjustable Trimless Reflector 4" O.D.	WET LOCATION	ELK408W	White
			ELK408B	Black
			ELK408H	Haze
			ELK408BZ	Bronze
	4" Round Adjustable Trimless Reflector 4" O.D. - 35° tilt	DAMP LOCATION	ELK415W	White
			ELK415B	Black
			ELK415H	Haze
			ELK415BZ	Bronze
	4" Round Trimless Spackle Frame 7 ⅛" O.D. - 4" I.D.		EL4SFR	For use with ELK408 and ELK415
	4" Trimless Wood Ceiling Ring 5 ¾" W - 3 ¾" I.D.		EL4WCARD	For use with ELK408 and ELK415
	4" Square Trimless Reflector 3 ¼" Sq.	WET LOCATION	ELK445W	White
			ELK445B	Black
			ELK445H	Haze
	4" Square Adjustable Trimless Reflector 3 ¼" Sq. - 35° tilt	DAMP LOCATION	ELK459W	White
			ELK459B	Black
			ELK459H	Haze
	4" Square Trimless Spackle Frame 6 ¼" Sq. - 3 ⅛" Sq.		EL4SFS	For use with ELK445 and ELK459

The Koto™ MAX **System**


1 ½" Commercial Module with Twist-On Trims

INTEGRATED LED · TWIST-ON · 95+ CRI · IC RATED · 5 YEAR WARRANTY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE · ACCESSIBLE FROM BELOW ~~ACCESS FROM ABOVE~~

6" Pex™ Canless Trims for Koto™ MAX Module

	Description		CAT. #	Specs
	6" Round Reflector 7 ½" O.D. - 6" I.D.	WET LOCATION	EKCL6418W	All White
			EKCL6418BB	All Black
			EKCL6418BZ	All Bronze
			EKCL6418H	Haze Ref./White Ring
	6" Round Adjustable Reflector 7 ½" O.D. - 6" I.D. - 30˚ tilt	DAMP LOCATION	EKCL6429W	All White
			EKCL6429BB	All Black
			EKCL6429BZ	All Bronze
			EKCL6429H	Haze Ref./White Ring
	6" Round Adjustable Pinhole with Reflector 8" O.D. - 1 ¾" I.D. - 35˚ tilt	DAMP LOCATION	EKCL6427W	All White
			EKCL6427B	Black Ref./White Ring
			EKCL6427H	Haze Ref./White Ring
	6" Square Adjustable Reflector 6 ¾" Sq. - 4 ¼" Sq. - 30˚ tilt	DAMP LOCATION	EKCL6829W	All White
			EKCL6829BB	All Black
			EKCL6829H	Haze Ref./White Ring

Accessories Field Changeable, Fire Rated, and Emergency Battery


	Description	CAT. #	Specs
	Field Changeable Lens	EP731C	18º Lens
		EP732C	25º Lens
		EP733C	38º Lens
		EP734C	60º Lens
	Field Changeable Lens	EP739C	90º Frosted Reflector
	Field Changeable Secondary Optic Hex Louver	L45	Black, for a better glare shield
		L57	White, for a better glare shield

The Koto™ MAX **System**


1 ½" Commercial Module with Twist-On Trims

INTEGRATED LED · TWIST-ON · 95+ CRI · IC RATED · 5 YEAR WARRANTY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE · ACCESSIBLE FROM BELOW ~~ACCESS FROM ABOVE~~


Accessories Field Changeable, Fire Rated, and Emergency Battery


	Description	CAT. #	Specs
	Field Changeable Secondary Optic Linear	L46	For a wide rectangular illumination pattern
	Field Changeable Secondary Optic Spread	L47	For a symmetrical broadening of light beams
	Field Changeable Secondary Optic Frosted Diffuser	L49	For a softer light
	Field Changeable Secondary Optic Color Shifter	L51	For a reduced color temperature
	Field Changeable Secondary Optic Color Lens	L52	Blue lens
		L53	Pink lens
	Asymmetric Lens	L54	Single asymmetric, for elliptical illumination pattern
		L55	Double asymmetric, for elliptical illumination pattern
	Snoot for Koto™ Modules	L50W	White, reduces glare and light spill
		L50B	Black, reduces glare and light spill
	1-Hour Fire Enclosure	FIREENCL	20 ⅜" L - 14 ⅜" W - 9" H
		FIREENCL-S	Shallow 16" L - 14 ⅜" W - 7 ¼" H
	Mica Fire Tape for use with FIREENCL	FIRETAPE	16' Roll
	Recessed Fixture 2-Hour Fire Rated Cover	FIRECVR	Made of heat activated intumescent material. 17" O.D. - 13" I.D. - 9 ¾" H
	Emergency Battery Backup (90 Min. of Emergency Light)	KEM-ERT	25W, 120/277V AC, 50/60 Hz. Compatible to all 3"-8" Elm Fixtures (ERT3, ERT4, ERT6, & ERT8) & Canless Koto™ System

Koto™ Multiples With Module & Twist-On Trims



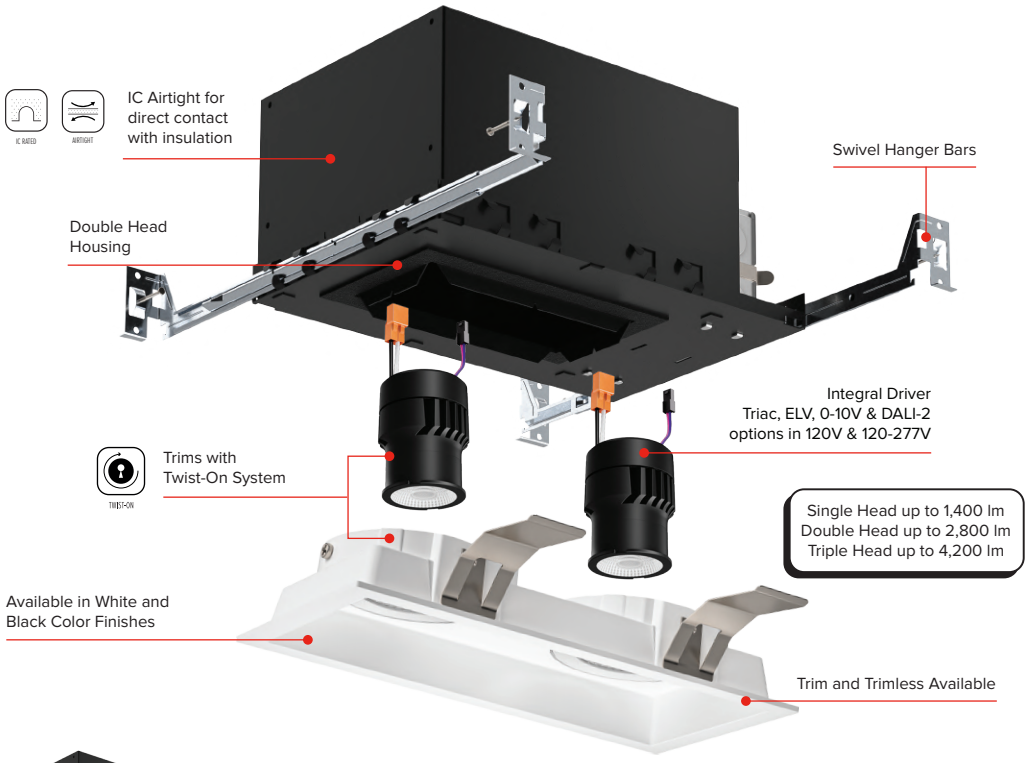


TITLE 24 COMPLIANT
DIMMABLE
DAMP LOCATION
5 YEAR WARRANTY
95+ CRI
INTEGRATED LED
50,000 HOURS

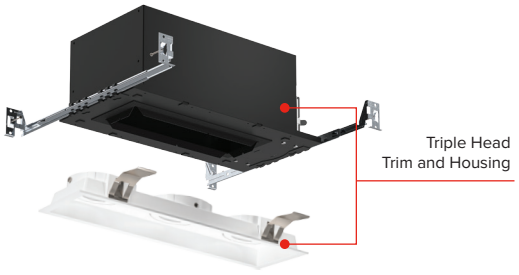

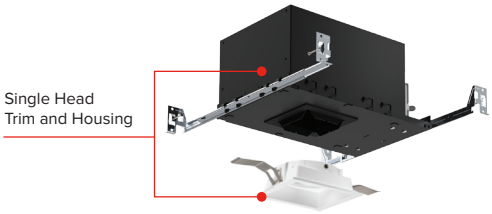

Covered by U.S. PATENTS and Patents Pending

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
1 ½″ Aperture Module 	Single, Double and Triple Head Trims and Trimless 	All Black ● All White ○	 350 lm - 1400 lm per head	 2400K - 4000K, Sunset, Human Centric, 5-CCT & 1800K - 4000K Tunable White

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Koto™ Multiples **System**

1 ½" Aperture Module with Twist-On Trims





NEW! Koto™ Multiples IC Airtight Housings

	Description	CAT. #	Specs
	**Single Head** Koto™ Multiples IC Airtight New Construction Housing IC rated for use with and without insulation	E2KM1AICDXA	Single Head, 5 ½" Height
	**Double Head** Koto™ Multiples IC Airtight New Construction Housing IC rated for use with and without insulation	E2KM2BICDXA	Double Head, 5 ½" Height
	**Triple Head** Koto™ Multiples IC Airtight New Construction Housing IC rated for use with and without insulation	E2KM3CICDXA	Triple Head, 5 ½" Height

Koto™ Multiples LED Modules

	Description	CAT. #	Specs
	Koto™ **DX** LED Module 120-277V, 0-10V/Triac/ELV dims to 1% 1 ½" Aperture - 3 ¼" H Standard 38° Lens Installed, with field changeable 25° & 60° lenses included Optional Lenses: 18° (EP731C), 90° (EP739C) For full list of optional accessories see Koto™ LED Module accessories (pg. 9)	ELK10DX27	11.8W, 1000 lm, 2700K, 120-277V, 0-10V/Triac/ELV
		ELK10DX30	11.8W, 1000 lm, 3000K, 120-277V, 0-10V/Triac/ELV
		ELK10DX35	11.8W, 1000 lm, 3500K, 120-277V, 0-10V/Triac/ELV
		ELK10DX40	11.8W, 1000 lm, 4000K, 120-277V, 0-10V/Triac/ELV
		ELK10DXSD	11.8W, 1000 lm, Sunset, 120-277V, 0-10V/Triac/ELV
	DALI-2 DT8 Koto™ **Tunable White** LED Module dims to 0.1% 1 ½" Aperture - 3 ¼" H Tunable White 4000K - 1800K Standard 38° Lens Installed, with field changeable 25° & 60° lenses included Optional Lenses: 18° (EP731C), 90° (EP739C) For full list of optional accessories see Koto™ LED Module accessories (pg. 11)	ELK08AL41TW	11.5W, 880 lm, 4000K-1800K, 120-277V

The Koto™ Multiples **System**

1 ½" Aperture Module with Twist-On Trims





Koto™ Multiples LED Modules

Description	CAT. #	Specs
Koto™ LED Module 1 ½" Aperture - 2 ⅞" H Standard 38° Lens Installed, with field changeable 25° & 60° lenses included Optional Lenses: 18° (EP731C), 90° (EP739C) Optional: White Louver (L45) Black Louver (L57) Linear Lens (L46) Spread Lens (L47) Frosted Diffuser (L49) Snoot (L50) Color Shifter (L51) Blue Lens (L52) Pink Lens (L53) Single Asymmetric Lens (L54) Double Asymmetric Lens (L55) TWIST-ON	ELK0327	5W, 350 lm, 2700K, 120V
	ELK0330	5W, 350 lm, 3000K, 120V
	ELK0724	10.5W, 730 lm, 2400K, 120V
	ELK0727	10.5W, 770 lm, 2700K, 120V
	ELK0730	10.5W, 800 lm, 3000K, 120V
	ELK0735	10.5W, 830 lm, 3500K, 120V
	ELK0740	10.5W, 860 lm, 4000K, 120V
	ELK0924	10.5W, 900 lm, 2400K, 120V
	ELK0927	10.5W, 940 lm, 2700K, 120V
	ELK0930	10.5W, 990 lm, 3000K, 120V
	ELK0935	10.5W, 1040 lm, 3500K, 120V
	ELK0940	10.5W, 1100 lm, 4000K, 120V
	ELK09SD	10.5W, 940 lm, Sunset, 120V
	ELK1124	12.5W, 1060 lm, 2400K, 120V
	ELK1127	12.5W, 1100 lm, 2700K, 120V
	ELK1130	12.5W, 1150 lm, 3000K, 120V
	ELK1135	12.5W, 1200 lm, 3500K, 120V
	ELK1140	12.5W, 1260 lm, 4000K, 120V
	ELK11HC	12.5W, 1050 lm, Human Centric, 120V
	ELK11SD	12.5W, 1050 lm, Sunset, 120V
	ELK1327	12.5W, 1250 lm, 2700K, 120V
	ELK1330	12.5W, 1300 lm, 3000K, 120V
	ELK1335	12.5W, 1350 lm, 3500K, 120V
	ELK1340	12.5W, 1400 lm, 4000K, 120V
Koto™ **5-CCT** LED Module Switch to desire Color Temperature: 2700K, 3000K, 3500K, 4000K, 5000K CCT SWITCH	ELK08CT5	10.5W, 850 lm, 120V, 2700K - 5000K
	ELK10CT5	12.5W, 1000 lm, 120V, 2700K - 5000K
10° Koto™ LED Module **(Narrow Spot)** Includes 10° lens installed, and field changeable 25° & 38° lens included.	ELK0327-NSP	5W, 350 lm, 2700K, 120V
	ELK0330-NSP	5W, 350 lm, 3000K, 120V
10° Koto™ LED Module **(Narrow Spot)** Includes 10° lens installed, and field changeable 25° & 38° lens included.	ELK0827-NSP	10.5W, 850 lm, 2700K, 120V
	ELK0830-NSP	10.5W, 850 lm, 3000K, 120V
Koto™ **FOCUS** LED Module 18° - 50° Adjustable Focus with a simple twist of the lens. TWIST-ON Includes white snoot installed on module and field changeable black snoot.	ELK0727-FC	10.5W, 770 lm, 2700K, 120V
	ELK0730-FC	10.5W, 800 lm, 3000K, 120V
	ELK0735-FC	10.5W, 830 lm, 3500K, 120V
	ELK0740-FC	10.5W, 860 lm, 4000K, 120V
	ELK07SD-FC	10.5W, 720 lm, Sunset, 120V

The Koto™ Multiples **System**

1 ½" Aperture Module with Twist-On Trims








NEW! Koto™ Multiples Trims


	Description	CAT. #	Specs
	Single Head Trim	EKCM218A1W	All White, 359° rotation, 35° tilt
		EKCM218A1BB	All Black, 359° rotation, 35° tilt
	Double Head Trim	EKCM218B2W	All White, 359° rotation, 35° tilt
		EKCM218B2BB	All Black, 359° rotation, 35° tilt
	Triple Head Trim	EKCM218C3W	All White, 359° rotation, 35° tilt
		EKCM218C3BB	All Black, 359° rotation, 35° tilt

NEW! Koto™ Multiples Trimless

	Description	CAT. #	Specs
	Single Head Trimless Trim	EKCM230A1W	All White, 359° rotation, 35° tilt
		EKCM230A1BB	All Black, 359° rotation, 35° tilt
	Single Head Trimless Spackle Frame	EKCM2SFA1	For use with EKCM230A1
	Double Head Trimless Trim	EKCM230B2W	All White, 359° rotation, 35° tilt
		EKCM230B2BB	All Black, 359° rotation, 35° tilt
	Double Head Trimless Spackle Frame	EKCM2SFB2	For use with EKCM230B2
	Triple Head Trimless Trim	EKCM230C3W	All White, 359° rotation, 35° tilt
		EKCM230C3BB	All Black, 359° rotation, 35° tilt
	Triple Head Trimless Spackle Frame	EKCM2SFC3	For use with EKCM230C3

The Koto™ System

Canless Koto™ Multiples With Module & Twist-On Trims

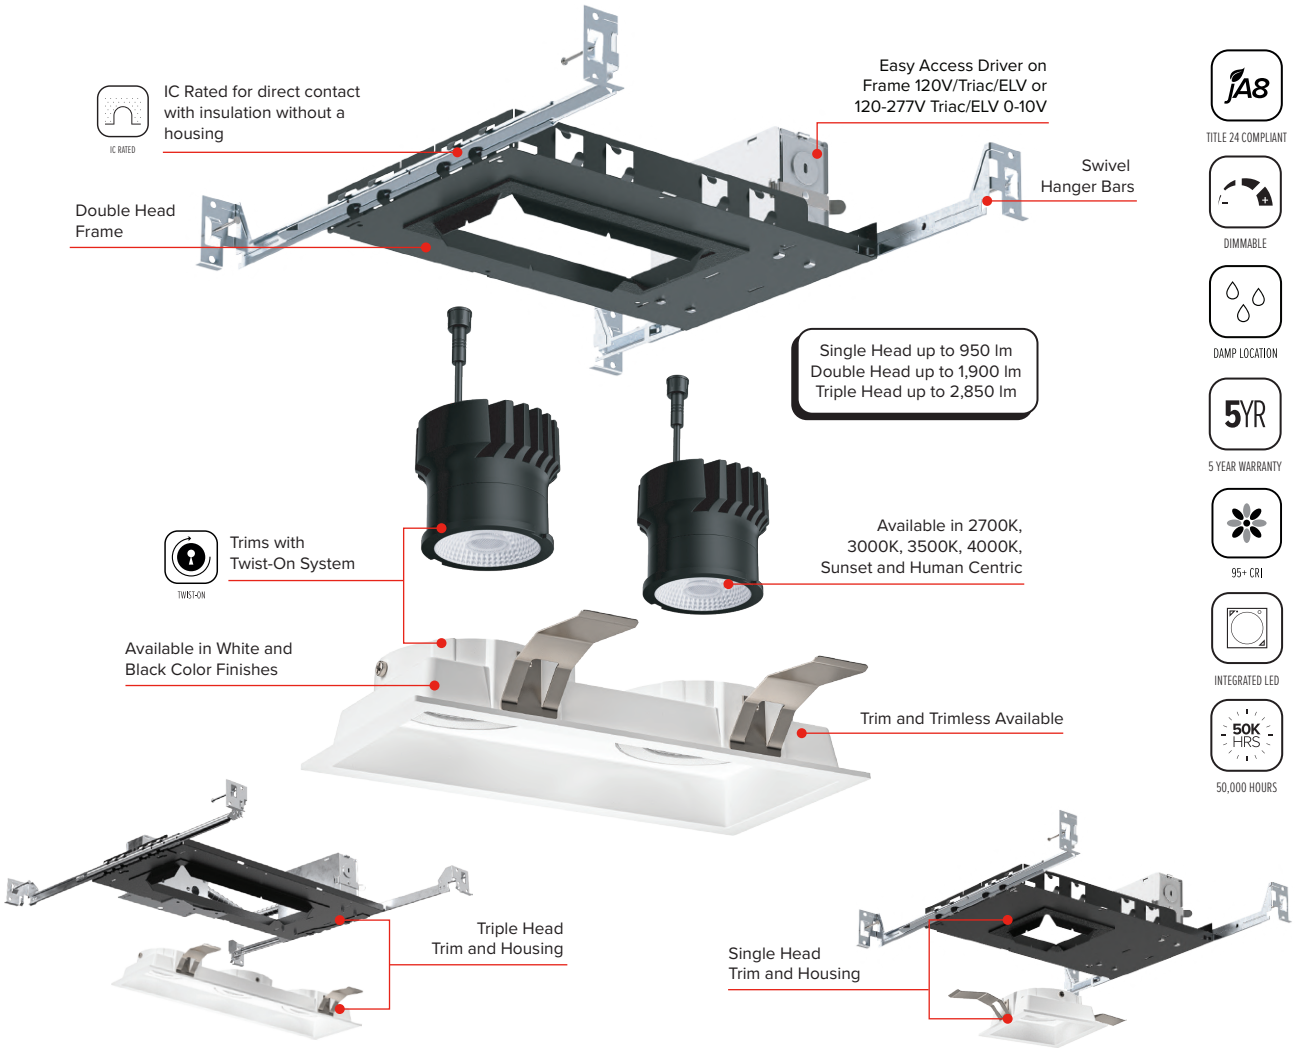

Covered by U.S. PATENTS and Patents Pending

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
1 ½" Aperture Module	Single, Double and Triple Head Trims and Trimless	All Black All White	Up to 950 lm per head	2700K - 4000K, Sunset & Human Centric

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Koto™ Multiples **System**

1 ½" Aperture Module with Twist-On Trims



93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

NEW! **Canless Koto™ Multiples** Frames and Remodel Power Packs

	Description	CAT. #	Specs
	**Single Head** Canless Koto™ Multiples New Construction IC Frame with Driver	E2MCK10IC	120V - Triac/ELV, 3 ½" Height
		E2MCK10ICDX	120-277V - 0-10V/Triac/ELV, 3 ½" Height
	**Double Head** Canless Koto™ Multiples New Construction IC Frame with Driver	E2MCK102BIC	120V - Triac/ELV, 3 ½" Height
		E2MCK102BICDX	120-277V - 0-10V/Triac/ELV, 3 ½" Height
	**Triple Head** Canless Koto™ Multiples New Construction IC Frame with Driver	E2MCK103CIC	120V - Triac/ELV, 4 ½" Height
		E2MCK103CICDX	120-277V - 0-10V/Triac/ELV, 3 ½" Height
	**Single Head** Canless Koto™ Multiples IC Remodel Power Pack with driver	EKCL10RIC	120V - Triac/ELV, 2 ⅛" Height
		EKCL10RICDX	120-277V - 0-10V/Triac/ELV, 2 ⅛" Height
	**Double Head** Canless Koto™ Multiples IC Remodel Power Pack with driver	EKCL10R2BIC	120V - Triac/ELV, 2 ¾" Height
		EKCL10R2BICDX	120-277V - 0-10V/Triac/ELV, 2 ¾" Height
	**Triple Head** Canless Koto™ Multiples IC Remodel Power Pack with driver	EKCL10R3CIC	120V - Triac/ELV, 2 ¾" Height
		EKCL10R3CICDX	120-277V - 0-10V/Triac/ELV, 2 ¾" Height

Canless Koto™ Multiples LED Module

	Description	CAT. #	Specs
	Canless Koto™ Multiples LED Module Designed to be installed without a recessed housing! 1 ½" Aperture - 2" H Standard 38° Lens Installed, with field changeable 25° & 60° lenses included Optional Lenses: 18° (EP731C) 90° (EP739C) Optional: White Louver (L45) Black Louver (L57) Linear Lens (L46) Spread Lens (L47) Frosted Diffuser (L49) Snoot (L50) Color Shifter (L51) Single Asymmetric Lens (L54) Double Asymmetric Lens (L55) TWIST-ON	EKCL2124D	Up to 950 lm, 2400K
		EKCL2127D	Up to 950 lm, 2700K
		EKCL2130D	Up to 950 lm, 3000K
		EKCL2135D	Up to 950 lm, 3500K
		EKCL2140D	Up to 950 lm, 4000K
		EKCL21SDD	Up to 950 lm, Sunset Dim to warm
		EKCL21HCD	Up to 950 lm, Human Centric Dim to warm

The Koto™ Multiples **System**

1 ½" Aperture Module with Twist-On Trims







NEW! Canless Koto™ Multiples Trims

	Description	CAT. #	Specs
	Single Head Trim	EKCM218A1W	All White, 359° rotation, 35° tilt
		EKCM218A1BB	All Black, 359° rotation, 35° tilt
	Double Head Trim	EKCM218B2W	All White, 359° rotation, 35° tilt
		EKCM218B2BB	All Black, 359° rotation, 35° tilt
	Triple Head Trim	EKCM218C3W	All White, 359° rotation, 35° tilt
		EKCM218C3BB	All Black, 359° rotation, 35° tilt

NEW! Canless Koto™ Multiples Trimless

	Description	CAT. #	Specs
	Single Head Trimless Trim	EKCM230A1W	All White, 359° rotation, 35° tilt
		EKCM230A1BB	All Black, 359° rotation, 35° tilt
	Single Head Trimless Spackle Frame	EKCM2SFA1	For use with EKCM230A1
	Double Head Trimless Trim	EKCM230B2W	All White, 359° rotation, 35° tilt
		EKCM230B2BB	All Black, 359° rotation, 35° tilt
	Double Head Trimless Spackle Frame	EKCM2SFB2	For use with EKCM230B2
	Triple Head Trimless Trim	EKCM230C3W	All White, 359° rotation, 35° tilt
		EKCM230C3BB	All Black, 359° rotation, 35° tilt
	Triple Head Trimless Spackle Frame	EKCM2SFC3	For use with EKCM230C3

Koto™ MAX Multiples With Module & Twist-On Trims

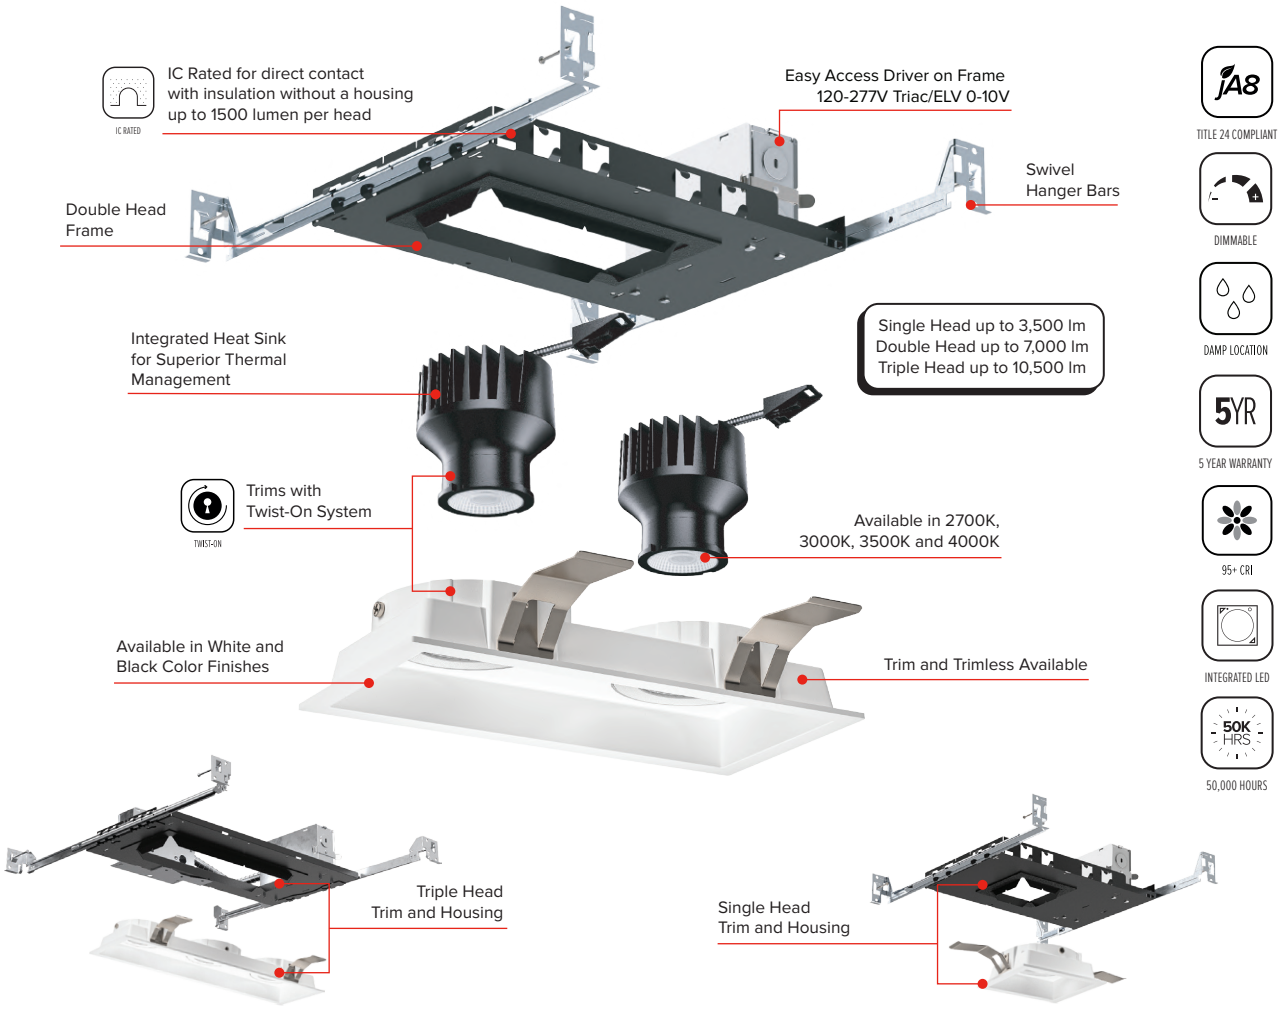

Covered by U.S. PATENTS and Patents Pending

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
1 ½" Aperture Module	Single, Double and Triple Head Trims	All Black All White	Up to 3,500 lm per head Up to 10,500 per triple head	2700K - 4000K

The Koto™ Multiples **System**

1 ½" Aperture Module with Twist-On Trims



93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

NEW! Koto™ MAX Multiples New Construction Frames and Remodel/Retrofit

New Construction Frames



Single Head | Double Head | Triple Head

Remodel/Retrofit Power Packs



Single Head | Double Head | Triple Head

Koto™ MAX Multiples Frame Product Number Builder

Style		Lumens/Wattage Per Head		Frame		Voltage/Dimming	
E2KMT	2" New Construction	**07**[2]	750 lm (6W)	**(Blank)**	Single	**DX**	120-277V, 0-10V/Triac/ELV (1%)
ECKTRM[1]	Remodel/Retrofit	**10**[2]	1000 lm (8W)	**B2**	Double		
		12[2]	1250 lm (11W)	**C3**	Triple		
		15[2]	1500 lm (14W)				
		20[3]	2000 lm (19W)				
		25[3]	2500 lm (23W)				
		30[3]	3000 lm (29W)				
		35[3]	3500 lm (32W)				

Example: **E2KMT15** [Koto™ MAX 2" New Construction, 1500 lm Per head, Double Head Frame, 120-277V,0-10/Triac/ELV (1%)]

[1] Remodel/Retrofit is available up to 2500 lumens [2] IC Rated up tp 1500 lumens [3] Non-IC, for use without insulation 2000 lm - 3500 lm

Koto™ MAX Multiples LED Module



- The high quality commercial grade downlight engineered to be shallow, taking less space than a regular recessed housing.
- **ECKT35 module** works with all Koto™ MAX Multiples housings & trims, for all sizes & lumen outputs
- 1 ½" Aperture - 3 ¼" Height
- Includes Standard 38° lens installed, with field changeable 25° and 60° lenses Included. Optional: 18° and 90° lenses available
- Color temperature range options of 2700K, 3000K, 3500K and 4000K.

Koto™ MAX Multiples Module Product Number Builder

Module		Color Temperature		Beam Angle	
ECKT35	Koto™ Max Module	**27D**	2700K	**(Blank)**[1]	38°
		30D	3000K	**-S**	18°
		35D	3500K	**-N**	25°
		40D	4000K	**-W**	60°
				-E[2]	90°

Example: **ECKT3530D-W** [Koto™ MAX Module, 3000K, 60° Beam Angle]

[1] 38° installed on module with 25° & 60° included in the box.
[2] 90° available with frosted reflector only.

The Koto™ Multiples **System**

1 ½" Aperture Module with Twist-On Trims





NEW! Koto™ MAX Multiples Trims

	Description	CAT. #	Specs
	Single Head Trim	EKCM218A1W	All White, 359° rotation, 35° tilt
		EKCM218A1BB	All Black, 359° rotation, 35° tilt
	Double Head Trim	EKCM218B2W	All White, 359° rotation, 35° tilt
		EKCM218B2BB	All Black, 359° rotation, 35° tilt
	Triple Head Trim	EKCM218C3W	All White, 359° rotation, 35° tilt
		EKCM218C3BB	All Black, 359° rotation, 35° tilt


The Koto™ **System**

1 ½" Aperture Module with Twist-On Trims





Accessories Field Changeable

	Description	CAT. #	Specs
	Field Changeable Lens	EP731C	18° Lens
		EP732C	25° Lens
		EP733C	38° Lens
		EP734C	60° Lens
		EP739C	90° Lens
	Field Changeable Reflectors	EP735C	15° Reflector
		EP736C	25° Reflector
		EP737C	38° Reflector
		EP738C	60° Reflector
	Field Changeable Secondary Optic Hex Louver	L45	Black, for a better glare shield
		L57	White, for a better glare shield
	Field Changeable Secondary Optic Linear	L46	For a wide rectangular illumination pattern
	Field Changeable Secondary Optic Spread	L47	For a symmetrical broadening of light beams
	Field Changeable Secondary Optic Frosted Diffuser	L49	For a frosted lens look
	Field Changeable Secondary Optic Color Shifter	L51	For a reduced color temperature
	Field Changeable Secondary Optic Color Lens	L52	Blue lens
		L53	Pink lens
	Asymmetric Lens	L54	Single elliptical illumination pattern
		L55	Double elliptical illumination pattern for accent lighting
	Snoot for Koto™ Modules	L50W	White
		L50B	Black
	Hard Wire Adapter	PSA38	Hard wire adapter to male Quick Connect terminal
	4" Hard Wire Adapter	PSA38-4	4" Hard Wire Adapter to male Quick
	Rewiring Kit	PSA38-22	22" Rewiring Kit to male Quick Connect terminal.

The **Oak™ System**


1″ Miniature **LED Downlights**




Up to 6 Oak™ fixtures can be daisy-chained to one **E1LDRV60**

Small Aperture, Big Light!

STYLES




Round



Square



Round Adjustable



Square Adjustable

FINISHES


White

Bronze

Black

Haze

LUMENS



450 lm to 700 lm

COLOR TEMPERATURE



2700K - 5000K & Sunset

The Oak™ **System**

1" Miniature LED Downlights

TITLE 24 COMPLIANT · DIMMABLE · 93+ CRI · IC RATED · IN TODAY OUT TODAY · 50,000 HOURS

Recessed LED Downlights

Description			Cat. # / Specs				
			2700K 6W/600 lm	3000K 6W/625 lm	3500K 6W/650 lm	4000K 6W/675 lm	Sunset 6W/450 lm
	1" Round Downlight 2 ¼" O.D. - 2 ⅞" H	WET LOCATION	E1L02F27W E1L02F27B E1L02F27BZ E1L02F27H E1L02F27BB	E1L02F30W E1L02F30B E1L02F30BZ E1L02F30H E1L02F30BB	E1L02F35W E1L02F35B E1L02F35BZ E1L02F35H E1L02F35BB	E1L02F40W E1L02F40B E1L02F40BZ E1L02F40H E1L02F40BB	E1L02FSDW E1L02FSDB E1L02FSDBZ E1L02FSDH E1L02FSDBB
			6W/600 lm	6W/625 lm	6W/650 lm	6W/675 lm	6W/450 lm
	1" Square Downlight 2 ¼" Sq. - 2 ⅞ H"	WET LOCATION	E1L12F27W E1L12F27B E1L12F27BZ E1L12F27H E1L12F27BB	E1L12F30W E1L12F30B E1L12F30BZ E1L12F30H E1L12F30BB	E1L12F35W E1L12F35B E1L12F35BZ E1L12F35H E1L12F35BB	E1L12F40W E1L12F40B E1L12F40BZ E1L12F40H E1L12F40BB	E1L12FSDW E1L12FSDB E1L12FSDBZ E1L12FSDH E1L12FSDBB
			6W/600 lm	6W/625 lm	6W/650 lm	6W/675 lm	6W/450 lm
 E1L61F + EL01SFR	1" Round Trimless Downlight 2 ⅜" O.D. - 3 ⅜" H	WET LOCATION	E1L61F27W E1L61F27BB E1L61F27BZ	E1L61F30W E1L61F30BB E1L61F30BZ	E1L61F35W E1L61F35BB E1L61F35BZ	E1L61F40W E1L61F40BB E1L61F40BZ	E1L61FSDW E1L61FSDBB E1L61FSDBZ
	1" Round Spackle Frame (Sold Separately) 4" O.D. - 2 ⅜" I.D.		EL01SFR				

Finish: (W) All White, **(B)** Black/White, **(BZ)** All Bronze, **(H)** Haze/White, **(BB)** All Black

Recessed LED Adjustables

Description			Cat. # / Specs				
			6W/625 lm	6W/650 lm	6W/675 lm	6W/700 lm	
	1" Round Gimbal 2 11/16" O.D. - 2 11/16" H 36° Adjustability	DAMP LOCATION	E1L32F27W E1L32F27B E1L32F27BZ	E1L32F30W E1L32F30B E1L32F30BZ	E1L32F35W E1L32F35B E1L32F35BZ	E1L32F40W E1L32F40BZ	
			6W/625 lm	6W/650 lm		6W/700 lm	
	1" Square Pull Down 2 ¾" Sq. - 2 5/16" H 36° Adjustability	DAMP LOCATION	E1L22F27W E1L22F27B E1L22F27BZ	E1L22F30W E1L22F30B E1L22F30BZ		E1L22F40W	

Finish: (W) All White, **(B)** All Black, **(BZ)** All Bronze

The Oak™ **System**

1" Miniature LED Downlights

TITLE 24 COMPLIANT | DIMMABLE | 93+ CRI | IC RATED | IN TODAY OUT TODAY | 50,000 HOURS

Mounting Frames

	Description	CAT. #	Specs
	Optional Mounting Frame (Requires Transformer)	E1LF1	For E1L02, E1L12 & E111 Series. 2" Cutout
		E1LF2	For E1L22 & E1L32 Series. 2 ⅜" Cutout
		E2LF2	For E1L61 Series. 2 1⅛" Cutout
	Optional Mounting Frame (Requires Transformer) * -M2 (2 frame holes), -M3 (3 frame holes), -M4 (4 frame holes), -M5 (5 frame holes)	E1LF1-M2*	For E1L02, E1L12 & E111F Series
		E1LF1-M3*	For E1L02, E1L12 & E111F Series
		E1LF1-M4*	For E1L02, E1L12 & E111F Series
		E1LF1-M5*	For E1L02, E1L12 & E111F Series
		E1LF2-M2*	For E1L22 & E1L32 Series
		E1LF2-M3*	For E1L22 & E1L32 Series
		E1LF2-M4*	For E1L22 & E1L32 Series
		E1LF2-M5*	For E1L22 & E1L32 Series
	Optional R60 Housing for E1L02, E1L12 & E111F (Includes Transformer) 2" Opening - 3 ½" H	E1LF1ICAJ	Input: 120V, ELV Dimmable
		E1LF1ICAJ-7	Input: 277V
		E1LF1ICAJDX	Input: 120V, 0-10V Dimmable
		E1LF1ICAJDX-7	Input: 277V, 0-10V Dimmable
	Optional R60 Housing for E1L22, E1L32 & E1L61 (Includes Transformer) 2 ⅜" Opening - 3 ½" H	E1LF2ICAJ	Input: 120V, ELV Dimmable
		E1LF2ICAJ-7	Input: 277V
		E1LF2ICAJDX	Input: 120V, 0-10V Dimmable
		E1LF2ICAJDX-7	Input: 277V, 0-10V Dimmable

Accessories Power Supplies

	Description		CAT. #	Specs
	Enclosed Electronic Transformer	DIMMABLE	E1LDRV60	Input: 120V, Out: 12V AC. 5 1/8" L x 1 3/8" W x 1" H
	Electronic Transformer	DIMMABLE	LET-60	Input: 120V, Out: 12V AC, Side lead
			LET-60H	Input: 120V, Out: 12V AC, Bottom lead
			LET-60-277	Input: 277V, Out: 12V AC
	0-10V Dimmable Electronic Transformer	DIMMABLE	LET-60DX	Input: 120V, Out: 12V AC
			LET-60DX-277	Input: 277V, Out: 12V AC
	Magnetic Transformer	DIMMABLE	ETR12	50W, Daisy Chain 2-6
			ETR12-20	20W, Daisy Chain 1-3


Accessories Trims & Optional Lenses

	Description	CAT. #	Specs
	Round Trim Ring (for use with E1L02 series) 2 ¼" O.D. - ⅞" Aperture	RM1W	All White
		RM1B	Black/White Ring
		RM1BZ	All Bronze
		RM1H	Haze/White Ring
		RM1BB	All Black
	Square Trim Ring (for use with E1L12 series) 2 ¼" Sq. - ⅞" Aperture	RM11W	All White
		RM11B	Black/White Ring
		RM11BZ	All Bronze
		RM11H	Haze/White Ring
		RM11BB	All Black
	Field Changeable Optional Lens (for use with E1L02, E1L12 and E1L32 series)	EP713C	28°
		EP715C	50°

The Architectural Oak™ **System**

1" Miniature LED Downlights with up to 1000 lumens





Recessed Downlight & Adjustable

Description			Cat. # / Specs				
			2700K 8W/850 lm	3000K 8W/900 lm	3500K 8W/950 lm	4000K 8W/1000 lm	Sunset 8W/850 lm
	1" Round Architectural Downlight 2 ¼" O.D. - 1 ⅞" H	WET LOCATION	E1AK02F27W E1AK02F27B E1AK02F27BZ E1AK02F27H E1AK02F27BB	E1AK02F30W E1AK02F30B E1AK02F30BZ E1AK02F30H E1AK02F30BB	E1AK02F35W E1AK02F35B E1AK02F35BZ E1AK02F35H E1AK02F35BB	E1AK02F40W E1AK02F40B E1AK02F40BZ E1AK02F40H E1AK02F40BB	E1AK02FSDW E1AK02FSDB E1AK02FSDBZ E1AK02FSDH E1AK02FSDBB
			8W/850 lm	8W/900 lm	8W/950 lm	8W/1000 lm	8W/850 lm
	1" Square Architectural Downlight 2 ¼" Sq. - 1 ⅞" H	WET LOCATION	E1AK12F27W E1AK12F27B E1AK12F27BZ E1AK12F27H E1AK12F27BB	E1AK12F30W E1AK12F30B E1AK12F30BZ E1AK12F30H E1AK12F30BB	E1AK12F35W E1AK12F35B E1AK12F35BZ E1AK12F35H E1AK12F35BB	E1AK12F40W E1AK12F40B E1AK12F40BZ E1AK12F40H E1AK12F40BB	E1AK12FSDW E1AK12FSDB E1AK12FSDBZ E1AK12FSDH E1AK12FSDBB
			8W/850 lm	8W/900 lm	8W/950 lm	8W/1000 lm	8W/850 lm
 E1AK61F + EL01SFR	1" Round Architectural Trimless Downlight 2 ⅜" O.D. - 2" H	WET LOCATION	E1AK61F27W E1AK61F27BB E1AK61F27BZ	E1AK61F30W E1AK61F30BB E1AK61F30BZ	E1AK61F35W E1AK61F35BB E1AK61F35BZ	E1AK61F40W E1AK61F40BB E1AK61F40BZ	E1AK61FSDW E1AK61FSDBB E1AK61FSDBZ
	1" Round Spackle Frame (Sold Separately) 4" O.D. - 2 ⅜" I.D.		EL01SFR				

Finish: (W) All White, **(B)** Black/White, **(BZ)** All Bronze, **(H)** Haze/White, **(BB)** All Black

Recessed Downlight & Adjustable


Description			Cat. # / Specs				
			8W/850 lm	8W/900 lm			
	1" Round Architectural Gimbal 2 1⁄16" O.D. - 2 9⁄16" H 30˚ Adjustability	DAMP LOCATION	E1AK32F27W E1AK32F27B	E1AK32F30W E1AK32F30B			
			8W/850 lm	8W/900 lm			
	1" Square Architectural Pull Down 2 ¾" Sq. - 2 ¼" H 30˚ Adjustability	DAMP LOCATION	E1AK22F27W E1AK22F27B	E1AK22F30W E1AK22F30B			

Finish: (W) All White, **(B)** All Black

The Architectural Oak™ **System**

1" Miniature LED Downlights with up to 1000 lumens






Oak™ Architectural Housings & Frames

	Description	CAT. #	Specs
	**R60** ICA New Construction Housings for E1AK02 and E1AK12 Downlights. 2" Opening - 3 ½" H	E1DWN08AJIC	120V, Triac/ELV
		E1DWN08AJICDX	120/277V, 0-10V/Triac/ELV
	for E1AK22 and E1AK32 Adjustables 2 ⅜" Opening - 3 ½" H	E1ATB08AJIC	120V, Triac/ELV
		E1ATB08AJICDX	120/277V, 0-10V/Triac/ELV
	for E1AK61 Trimless Downlights 2 ¾" Opening - 5 ½" H	E1TRL08AJIC	120V, Triac/ELV
		E1TRL08AJICDX	120/277V, 0-10V/Triac/ELV
	IC New Construction Frame for E1AK02 and E1AK12 Downlights. 2" Opening - 2 ⅝" H	E1DWN08IC	120V, Triac/ELV
		E1DWN08ICDX	120/277V, 0-10V/Triac/ELV
	for E1AK22 and E1AK32 Adjustables. 2 ⅜" Opening - 2 ⅝" H	E1ATB08IC	120V, Triac/ELV
		E1ATB08ICDX	120/277V, 0-10V/Triac/ELV
	for E1AK61 Trimless Downlights. 2 ¾" Opening - 2 ⅝" H	E1TRL08IC	120V, Triac/ELV
		E1TRL08ICDX	120/277V, 0-10V/Triac/ELV
	IC Remodel Power Pack for use with Architectural Oak Light Engines. 1 ½" W - 6 ¼" L - 3 ¼" H	E1RLA08IC	120V, Triac/ELV
		E1RLA08ICDX	120/277V, 0-10V/Triac/ELV
	Single Downlight Frame (Requires transformer)	E1LF1	For E1AK02 and E1AK12 Downlights. 2" Cutout
		E1LF2	For E1AK22 and E1AK32 Adjustables. 2 ⅜" Cutout
		E2LF1	For E1AK61 Trimless Downlights. 2 ⅝" Cutout
	Multiple Downlight Frames (Requires transformer) for E1AK02 and E1AK12 Downlights	E1LF1-M2	2 Set - frame Length: 8 ¾"
		E1LF1-M3	3 Set - frame Length: 13"
		E1LF1-M4	4 Set - frame Length: 17 ½"
		E1LF1-M5	5 Set - frame Length: 21 ¾"
	for E1AK22 and E1AK32 Adjustables	E1LF2-M2	2 Set - frame Length: 8 ¾"
		E1LF2-M3	3 Set - frame Length: 13"
		E1LF2-M4	4 Set - frame Length: 17 ½"
		E1LF2-M5	5 Set - frame Length: 21 ¾"
	for E1AK61 Trimless Downlights	E2LF2-M2	2 Set - frame Length: 8 ¾"
		E2LF2-M3	3 Set - frame Length: 13 ⅛"
		E2LF2-M4	4 Set - frame Length: 17 ½"
		E2LF2-M5	5 Set - frame Length: 21 ⅞"

Accessories Trims & Optional Lenses

	Description	CAT. #	Specs
	Round Trim Ring (for use with E1AK02 series) 2 ¼" O.D. - ⅞" Aperture	RM1W	All White
		RM1B	Black/White Ring
		RM1BZ	All Bronze
		RM1H	Haze/White Ring
		RM1BB	All Black
	Square Trim Ring (for use with E1AK12 series) 2 ¼" Sq. - ⅞" Aperture	RM11W	All White
		RM11B	Black/White Ring
		RM11BZ	All Bronze
		RM11H	Haze/White Ring
		RM11BB	All Black
	Round Trimless Ring (for use with E1AK61 series) 2 ⅜" O.D. - ⅞" Aperture	RM1TLW	All White
		RM1TLB	All Black
		RM1TLBZ	All Bronze
	Field Changeable Optional Lens (for use with E1AK02, E1AK12 & E1AK32 series)	EP713C	28°
		EP714C	38°
		EP715C	50°
	Field Changeable Frosted Diffuser (for use with E1AK02, E1AK12 & E1AK32 series)	L60	For a softer light
	Field Changeable Hex Louver (for use with E1AK02, E1AK12 & E1AK32 series)	L61	For a better glare shield

2″ LED **Downlights** & **Adjustables**

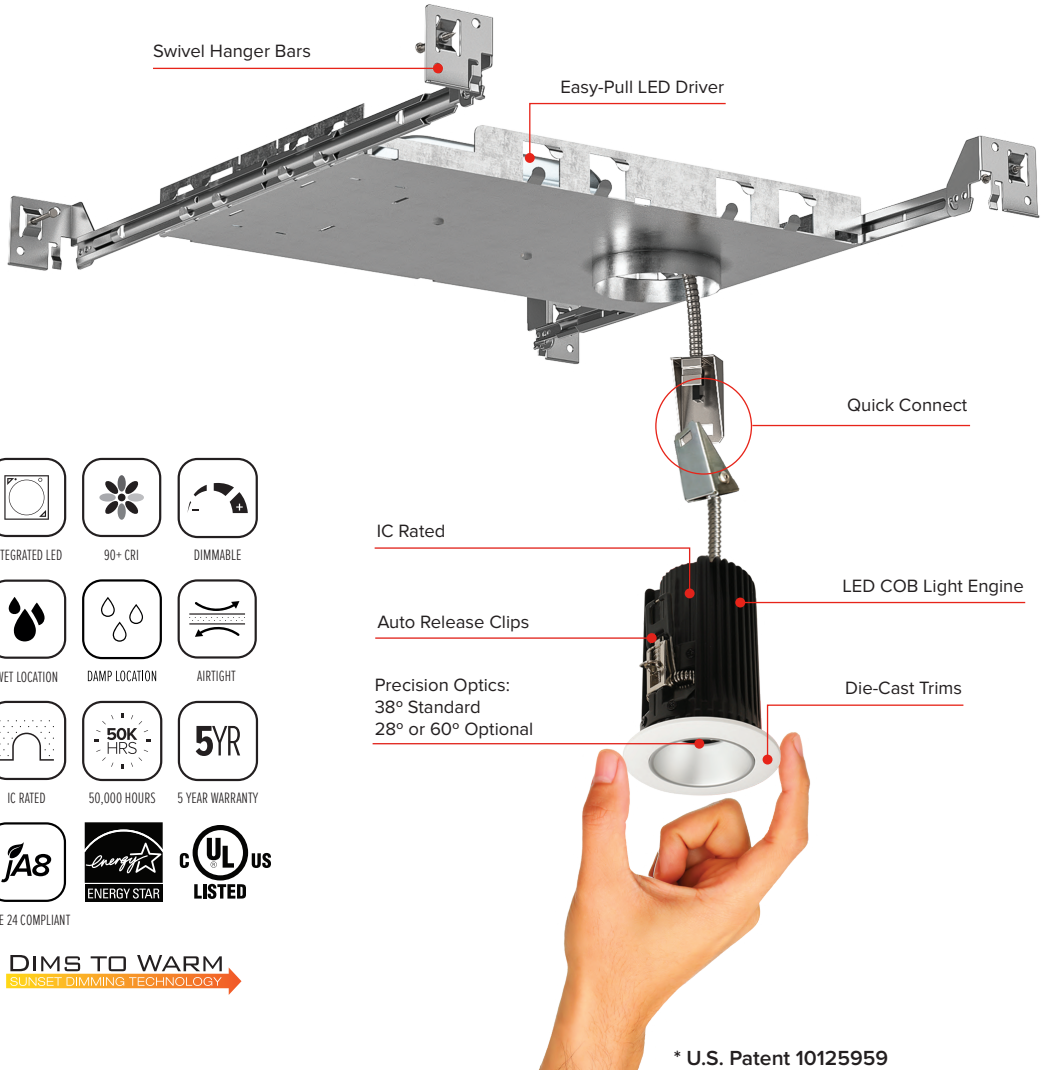

INTEGRATED LED · 90+ CRI · DIMMABLE

WET LOCATION · DAMP LOCATION · AIRTIGHT


IC RATED · 50,000 HOURS · 5 YEAR WARRANTY

TITLE 24 COMPLIANT · ENERGY STAR · c UL us LISTED


DIMS TO WARM
SUNSET DIMMING TECHNOLOGY

*** U.S. Patent 10125959**

STYLES



Round · Round Gimbal · Round Pull-Down



Square · Square Gimbal


FINISHES

White · Bronze

Black · Haze

Chrome

LUMENS



850 lm to 1100 lm

COLOR TEMPERATURE



2700K - 4000K
& Sunset

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Teak™ **System**

2″ LED Downlights & Adjustables

TITLE 24 COMPLIANT | DIMMABLE | 93+ CRI | IC RATED | IN TODAY OUT TODAY | 50,000 HOURS


2″ IC Rated Housings & Frames

	Description	Cat. #	Specs
	2″ IC New Construction Frame with Driver 2 11/16″ Opening - 2 5/8″ H	E2L08ICA	10.5W, 850 lm, 120V
		E2L08ICA-EM1	8W, 90 Min. Battery Backup, up to 800 lm
		E2L08ICA-EM2	15W, 90 Min. Battery Backup, up to 800 lm
		E2L11ICA	12.5W, 1100 lm, 120V
		E2L11ICA-EM1	8W, 90 Min. Battery Backup, up to 800 lm
		E2L11ICA-EM2	15W, 90 Min. Battery Backup, up to 1100 lm
		E2L08ICAD	10.5W, 850 lm, 120-277V
		E2L08ICAD-EM1	8W, 90 Min. Battery Backup, up to 800 lm
		E2L08ICAD-EM2	15W, 90 Min. Battery Backup, up to 800 lm
		E2L11ICAD	12.5W, 1100 lm, 120-277V
		E2L11ICAD-EM1	8W, 90 Min. Battery Backup, up to 800 lm
		E2L11ICAD-EM2	15W, 90 Min. Battery Backup, up to 1100 lm
	2″ R60 IC New Construction Housing with Driver 2 ½″ Opening - 5 ½″ H	E2LAJ08ICA	10.5W, 850 lm, 120V
		E2LAJ08ICA-EM1	8W, 90 Min. Battery Backup, up to 800 lm
		E2LAJ08ICA-EM2	15W, 90 Min. Battery Backup, up to 800 lm
		E2LAJ11ICA	12.5W, 1100 lm, 120V
		E2LAJ11ICA-EM1	8W, 90 Min. Battery Backup, up to 800 lm
		E2LAJ11ICA-EM2	15W, 90 Min. Battery Backup, up to 1100 lm
		E2LAJ08ICAD	10.5W, 850 lm, 120-277V
		E2LAJ08ICAD-EM1	8W, 90 Min. Battery Backup, up to 800 lm
		E2LAJ08ICAD-EM2	15W, 90 Min. Battery Backup, up to 800 lm
		E2LAJ11ICAD	12.5W, 1100 lm, 120/277V
		E2LAJ11ICAD-EM1	8W, 90 Min. Battery Backup, up to 800 lm
		E2LAJ11ICAD-EM2	15W, 90 Min. Battery Backup, up to 1100 lm
	2″ IC Remodel Power Pack 2 ½″ W - 5 ¾″ L - 2 ¼″ H	E2L08RIC	10.5W, 850 lm, 120V
		E2L08RIC-EM1	8W, 90 Min. Battery Backup, up to 800 lm
		E2L08RIC-EM2	15W, 90 Min. Battery Backup, up to 800 lm
		E2L11RIC	12.5W, 1100 lm, 120V
		E2L11RIC-EM1	8W, 90 Min. Battery Backup, up to 800 lm
		E2L11RIC-EM2	15W, 90 Min. Battery Backup, up to 1100 lm
	Emergency Battery Backup With 2″ IC Remodel Power Pack	E2L08RICD	10.5W, 850 lm, 120/277V
		E2L08RICD-EM1	8W, 90 Min. Battery Backup, up to 800 lm
		E2L08RICD-EM2	15W, 90 Min. Battery Backup, up to 800 lm
		E2L11RICD	12.5W, 1100 lm, 120-277V
		E2L11RICD-EM1	8W, 90 Min. Battery Backup, up to 800 lm
		E2L11RICD-EM2	15W, 90 Min. Battery Backup, up to 1100 lm

The Teak™ **System**

2″ LED Downlights & Adjustables





2″ LED Light Engines

Description			Cat. # / Specs				
			2700K 10.5W - 12W 850/1100 lm	3000K 10.5W - 12W 850/1100 lm	3500K 10.5W - 12W 850/1100 lm	4000K 10.5W - 12W 850/1100 lm	Sunset 10.5W - 12W 800/1000 lm
	2″ Round Reflector 3 ¼″ O.D. - 4 ½″ H	WET LOCATION	E2L10F27W E2L10F27B E2L10F27BZ E2L10F27C E2L10F27H E2L10F27BB	E2L10F30W E2L10F30B E2L10F30BZ E2L10F30C E2L10F30H E2L10F30BB	E2L10F35W E2L10F35B E2L10F35BZ E2L10F35C E2L10F35H E2L10F35BB	E2L10F40W E2L10F40B E2L10F40BZ E2L10F40C E2L10F40H E2L10F40BB	E2L10FSDW E2L10FSDB E2L10FSDBZ E2L10FSDC E2L10FSDH E2L10FSDBB
	2″ Round Baffle 3 ¼″ O.D. - 4 ½″ H	WET LOCATION	E2L14F27W E2L14F27B E2L14F27BZ E2L14F27BB	E2L14F30W E2L14F30B E2L14F30BZ E2L14F30BB	E2L14F35W E2L14F35B E2L14F35BZ E2L14F35BB	E2L14F40W E2L14F40B E2L14F40BZ E2L14F40BB	E2L14FSDW E2L14FSDB E2L14FSDBZ E2L14FSDBB
	2″ Square Reflector 3 ¼″ Sq. - 4 ½″ H	WET LOCATION	E2L13F27W E2L13F27B E2L13F27BZ E2L13F27C E2L13F27H E2L13F27BB	E2L13F30W E2L13F30B E2L13F30BZ E2L13F30C E2L13F30H E2L13F30BB	E2L13F35W E2L13F35B E2L13F35BZ E2L13F35C E2L13F35H E2L13F35BB	E2L13F40W E2L13F40B E2L13F40BZ E2L13F40C E2L13F40H E2L13F40BB	E2L13FSDW E2L13FSDB E2L13FSDBZ E2L13FSDC E2L13FSDH E2L13FSDBB
	2″ Square Baffle 3 ¼″ Sq. - 4 ½″ H	WET LOCATION	E2L15F27W E2L15F27B E2L15F27BZ E2L15F27BB	E2L15F30W E2L15F30B E2L15F30BZ E2L15F30BB	E2L15F35W E2L15F35B E2L15F35BZ E2L15F35BB	E2L15F40W E2L15F40B E2L15F40BZ E2L15F40BB	E2L15FSDW E2L15FSDB E2L15FSDBZ E2L15FSDBB
	2″ Round Adjustable 3 ¼″ O.D. - 4 ½″ H 35° Adjustability	DAMP LOCATION	E2L18F27W E2L18F27B E2L18F27BZ	E2L18F30W E2L18F30B E2L18F30BZ	E2L18F35W E2L18F35B	E2L18F40W	
	2″ Square Adjustable 3 ¼″ Sq. - 4 ½″ H 35° Adjustability	DAMP LOCATION	E2L19F27W E2L19F27B E2L19F27BZ	E2L19F30W E2L19F30B E2L19F30BZ			

The Teak™ **System**

2″ LED Downlights & Adjustables

TITLE 24 COMPLIANT | DIMMABLE | 93+ CRI | IC RATED | IN TODAY OUT TODAY | 50,000 HOURS

2″ LED Light Engines

Description			Cat. # / Specs			
			2700K 10.5W - 12W 850/1100 lm	3000K 10.5W - 12W 850/1100 lm	3500K 10.5W - 12W 850/1100 lm	4000K 10.5W - 12W 850/1100 lm
	2″ Round Pull Down 3 ¼″ O.D. - 4 ½″ H 80˚ Adjustability	DAMP LOCATION	E2L97F27W	E2L97F30W		
			E2L97F27B	E2L97F30B		
			E2L97F27BZ	E2L97F30BZ		

Accessories Interchangeable Trims

Description	CAT. #	Specs
2″ Flexa Round Ring (For use with E2L10, E2L13, E2L14, and E2L15 Series)	RM2W	White
	RM2B	Black
	RM2BZ	Bronze
 Reflector for 2″ Flexa Round Reflector (For use with RM2)	PR2W	White
	PR2B	Black
	PR2BZ	Bronze
	PR2C	Chrome
	PR2H	Haze
2″ Flexa Square Ring (For use with E2L10, E2L13, E2L14, and E2L15 Series)	RM22W	White
	RM22B	Black
	RM22BZ	Bronze
 Reflector for 2″ Flexa Square Reflector (For use with RM22)	PR22W	White
	PR22B	Black
	PR22BZ	Bronze

The Teak™ **System**

2″ LED Downlights & Adjustables



TITLE 24 COMPLIANT | DIMMABLE | 93+ CRI | IC RATED | IN TODAY OUT TODAY | 50,000 HOURS

Accessories Optional Lenses

	Description	CAT. #	Specs
	Field Changeable Optional Lens	EP716C	28°
		EP717C	38°
		EP718C	60°

Plaster Frames for Remodel Power Packs

	Description	Cat. #	Specs
	Single Cutout Plaster Frame 2 ⅝″ Opening	E2LF1	Requires Power Pack
	Large New Construction Frame 2 11⁄16″ Opening	E2LF2	Requires Power Pack
	Multiple Cutout Plaster Frame For row mounting fixtures 2 ⅝″ Opening	E2LF1-M2	2 Head. Requires Power Pack
		E2LF1-M3	3 Head. Requires Power Pack
		E2LF1-M4	4 Head. Requires Power Pack
		E2LF1-M5	5 Head. Requires Power Pack

The **Poplar™ System**

LED **Module** & Twist-On **Trims**

CAN BE USED IN 2-HOUR FIRE RATED CEILINGS



T24 TITLE 24 COMPLIANT

DIMMABLE

INTEGRATED LED

WET LOCATION

50K HRS 50,000 HOURS

5YR 5 YEAR WARRANTY

90+ CRI

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
4″ 6″	Round Wall Wash Square on Square Trimless	White, Black, Bronze, Black White Ring, Haze White Ring	750 lm to 1250 lm	CT5 Switch: 2700K, 3000K, 3500K, 4000K, 5000K

The Poplar™ **System**

3" Aperture Module with 4" & 6" Twist-On Trims

INTEGRATED LED | IC RATED | 50,000 HOURS | DIMMABLE | WET LOCATION | 5 YEAR WARRANTY | 90+ CRI | AIRTIGHT | TITLE 24 COMPLIANT

NEW! **Poplar**™ LED Module

Description	CAT. #	Specs
 **Poplar™ LED Module with 5-CCT and 3-Lumen Switch** TWIST-ON 3" Aperture - 2 ⅜" H Module works with all 4" and 6" Poplar™ recessed housings & Poplar™ Twist-on trims. Frosted polycarbonate lens diffuses light while reducing glare. CCT SWITCH LUMEN Switch	ELP11CT5DX	**3-Lumen Switch:** 850 lm, 1100 lm, 1250 lm **5-CCT Switch:** 2700K - 5000K 120-277V - 0-10V/Triac/ELV to 1%
 **Poplar™ LED Module with 5-CCT Switch** TWIST-ON 3" Aperture - 2 ½" H Module works with all 4" and 6" Poplar™ recessed housings & Poplar™ Twist-on trims. Frosted polycarbonate lens diffuses light while reducing glare. CCT SWITCH	ELP11CT5	1250 lm, **5-CCT Switch:** 2700K - 5000K 120V, Triac/ELV to 5%

4" Housings for Poplar™ LED Module

Description	CAT. #	Specs
  ICDXA 4" IC- Airtight Standard New Construction Housing	EL490ICA	120-277V - Triac/ELV, 5 ½" Height
	EL490ICA-EM5	Emergency Battery Backup
	EL490ICDXA	120-277V - 0-10V/Triac/ELV, 5 ½" Height
	EL490ICDXA-EM5	Emergency Battery Backup
  ICDXA 4" IC- Airtight Standard Remodel Housing	EL490RICA	120-277V - Triac/ELV, 5 ½" Height
	EL490RICA-EM5	Emergency Battery Backup
	EL490RICDXA	120-277V - 0-10V/Triac/ELV, 5 ½" Height
	EL490RICDXA-EM5	Emergency Battery Backup
  ICDXA 4" IC- Airtight Shallow New Construction Housing For shallow housing compatible trims look for this icon: (S)	EL492ICA	120-277V - Triac/ELV, 3 ½" Height
	EL492ICA-EM5	Emergency Battery Backup
	EL492ICDXA	120-277V - 0-10V/Triac/ELV, 3 ½" Height
	EL492ICDXA-EM5	Emergency Battery Backup




Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Poplar™ **System**

3″ Aperture Module with 4″ & 6″ Twist-On Trims

INTEGRATED LED · IC RATED · 50,000 HOURS · DIMMABLE · WET LOCATION · 5 YEAR WARRANTY · 90+ CRI · AIRTIGHT · TITLE 24 COMPLIANT

4″ Housings for Poplar™ LED Module

Description	CAT. #	Specs
 ICDXA 4″ IC- Airtight Shallow Remodel Housing For shallow housing compatible trims look for this icon: Ⓢ	EL492RICA	120-277V - Triac/ELV, 3 ½″ Height
	EL492RICA-EM5	Emergency Battery Backup
	EL492RICDXA	120-277V - 0-10V/Triac/ELV, 3 ½″ Height
	EL492RICDXA-EM5	Emergency Battery Backup
 ICDXA **R-60 Foam Insulation** 4″ IC- Airtight New Construction Housing	EL490AJICA	120-277V - Triac/ELV, 5 ½″ Height
	EL490AJICA-EM5	Emergency Battery Backup
	EL490AJICDXA	120-277V - 0-10V/Triac/ELV, 5 ½″ Height
	EL490AJICDXA-EM5	Emergency Battery Backup
 ICDXA **2-Hour Fire Junction Box** 4″ IC Airtight New Construction FIRE RATED	EJB4ICA	120-277V - Triac/ELV, 4 ⅝″″ Height
	EJB4ICA-EM5	Emergency Battery Backup
	EJB4ICDXA	120-277V - 0-10V/Triac/ELV, 4 ⅝″″ Height
	EJB4ICDXA-EM5	Emergency Battery Backup
 ICDXA **2-Hour Fire Junction Box** 4″ IC Airtight Remodel FIRE RATED	EJB4RICA	120-277V - Triac/ELV, 4 ½″ Height
	EJB4RICA-EM5	Emergency Battery Backup
	EJB4RICDXA	120-277V - 0-10V/Triac/ELV, 4 ½″ Height
	EJB4RICDXA-EM5	Emergency Battery Backup
 ICDXA **2-Hour Fire Junction Box** 4″ IC Airtight New Construction FIRE RATED	EJB475ICA	120-277V - Triac/ELV, 4 ⅝″ Height
	EJB475ICA-EM5	Emergency Battery Backup
	EJB475ICDXA	120-277V - 0-10V/Triac/ELV, 4 ⅝″Height
	EJB475ICDXA-EM5	Emergency Battery Backup
 **Concrete Pour** 4″ IC Airtight 2-Hour Fire Junction Box FIRE RATED	EJB4CNC	120-277V, 4 ½″ Height

The Poplar™ **System**

3″ Aperture Module with Twist-On Trims

INTEGRATED LED | IC RATED | 50,000 HOURS | DIMMABLE | WET LOCATION | 5 YEAR WARRANTY | 90+ CRI | AIRTIGHT | TITLE 24 COMPLIANT

4″ Flexa™ Diecast Trims for Poplar™ Module

Description		CAT. #	Specs
	4″ Round Reflector 5″ O.D. - 3 5⁄8″ I.D. WET LOCATION	ELL4621WW	All White
		ELL4621BB	All Black
		ELL4621BZ	All Bronze
		ELL4621BW	Black/White Ring
		ELL4621HW	Haze/White Ring
	4″ Round Baffle 5″ O.D. - 3 1⁄8″ I.D. WET LOCATION	ELL4623WW	All White
		ELL4623BB	All Black
		ELL4623BW	Black/White Ring
	4″ Square Reflector 4 3⁄4″ O.D. - 2 3⁄8″ I.D. WET LOCATION	ELL4641WW	All White
		ELL4641BB	All Black
		ELL4641BZ	All Bronze
		ELL4641BW	Black/White Ring
		ELL4641HW	Haze/White Ring
	4″ Square Baffle 4 3⁄4″ O.D. - 2 3⁄8″ I.D. WET LOCATION	ELL4643WW	All White
		ELL4643BB	All Black
		ELL4643BZBZ	All Bronze
		ELL4643BW	Black/White Ring

The Poplar™ **System**


3″ Aperture Module with Twist-On Trims

INTEGRATED LED · IC RATED · 50,000 HOURS · DIMMABLE · WET LOCATION · 5 YEAR WARRANTY · 90+ CRI · AIRTIGHT · TITLE 24 COMPLIANT

4″ Unique™ Diecast Trims for Poplar™ Module

	Description		CAT. #	Specs
	4″ Round Reflector 5″ O.D. - 3 5⁄8″ I.D.	S · WET LOCATION	ELL4810W	All White
			ELL4810B	All Black
			ELL4810BZ	All Bronze
	4″ Round Deep Reflector 5 1⁄8″ O.D. - 4″ I.D.	WET LOCATION	ELL4817W	All White
			ELL4817BZ	All Bronze
	4″ Round Wall Wash Reflector 5″ O.D. - 3 5⁄8″ I.D.	S · WET LOCATION	ELL4815W	All White
			ELL4815B	All Black
			ELL4815BZ	All Bronze
	4″ Square Reflector 4 1⁄2″ S.q. - 2 3⁄4″ I.D.	S · WET LOCATION	ELL4814W	All White
			ELL4814B	All Black
			ELL4814BZ	All Bronze
	4″ Square Baffle 4 1⁄2″ S.q. - 2 3⁄4″ I.D.	S · WET LOCATION	ELL4816W	All White
			ELL4816BZ	All Bronze
	4″ Square Deep Reflector 4 5⁄8″ S.q. - 2 5⁄8″ I.D.	WET LOCATION	ELL4818W	All White
			ELL4818BZ	All Bronze

4″ Housings for Poplar™ LED Module

	Description		CAT. #	Specs
 ICDXA	4″ New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings	NEW! · FIRE RATED	EJB483ICA	120-277V - Triac/ELV, 4 1⁄8″ Height
			EJB483ICA-EM5	Emergency Battery Backup
			EJB483ICDXA	120-277V - 0-10V/Triac/ELV, 4 1⁄8″ Height
			EJB483ICDXA-EM5	Emergency Battery Backup

4″ Unique™ Diecast Trimless for Poplar™ Module (Only for use with EJB483 housing)




	Description		CAT. #	Specs
	4″ Round Trimless Reflector (Spackle frame included) 7 1⁄8″ O.D. - 4″ I.D. **Only for use with EJB483 housing.**	WET LOCATION	ELL430W	All White
			ELL430B	All Black
			ELL430BZ	All Bronze

The Poplar™ **System**

3″ Aperture Module with Twist-On Trims

INTEGRATED LED · IC RATED · 50,000 HOURS · DIMMABLE · WET LOCATION · 5 YEAR WARRANTY · 90+ CRI · AIRTIGHT · TITLE 24 COMPLIANT

6″ Housings for Poplar™ LED Module

Description	CAT. #	Specs
 ICDXA — 6″ IC- Airtight Standard New Construction Housing	EL770ICA	120-277V - Triac/ELV, 7″ Height
	EL770ICA-EM5	Emergency Battery Backup
	EL770ICDXA	120-277V - 0-10V/Triac/ELV, 7″ Height
	EL770ICDXA-EM5	Emergency Battery Backup
 ICDXA — 6″ IC- Airtight Standard Remodel Housing	EL770RICA	120-277V - Triac/ELV, 7″ Height
	EL770RICA-EM5	Emergency Battery Backup
	EL770RICDXA	120-277V - 0-10V/Triac/ELV, 7″ Height
	EL770RICDXA-EM5	Emergency Battery Backup
 ICDXA — 6″ IC- Airtight Shallow New Construction Housing	EL760ICA	120-277V - Triac/ELV, 5 ½″ Height
	EL760ICA-EM5	Emergency Battery Backup
	EL760ICDXA	120-277V - 0-10V/Triac/ELV, 5 ½″ Height
	EL760ICDXA-EM5	Emergency Battery Backup
 ICDXA — 6″ IC- Airtight Shallow Remodel Housing. For shallow housing compatible trims look for this icon: (S)	EL760RICA	120-277V - Triac/ELV, 5 ½″ Height
	EL760RICA-EM5	Emergency Battery Backup
	EL760RICDXA	120-277V - 0-10V/Triac/ELV, 5 ½″ Height
	EL760RICDXA-EM5	Emergency Battery Backup
 ICDXA — 2-Hour Fire Rated 6″ IC Airtight Standard New Construction Housing (FIRE RATED)	EL76FICA	120-277V - Triac/ELV, 7 ¾″ Height
	EL76FICA-EM5	Emergency Battery Backup
	EL76FICDXA	120-277V - 0-10V/Triac/ELV, 7 ¾″ Height
	EL76FICDXA-EM5	Emergency Battery Backup
 ICDXA — 2-Hour Fire Rated 6″ IC Airtight Shallow New Construction Housing (FIRE RATED)	EL75FICAS	120-277V - Triac/ELV, 6 3⁄16″ Height
	EL75FICAS-EM5	Emergency Battery Backup
	EL75FICDXAS	20-277V - 0-10V/Triac/ELV, 6 3⁄16″ Height
	EL75FICDXAS-EM5	Emergency Battery Backup

The Poplar™ **System**

3″ Aperture Module with Twist-On Trims

INTEGRATED LED · IC RATED · 50,000 HOURS · DIMMABLE · WET LOCATION · 5 YEAR WARRANTY · 90+ CRI · AIRTIGHT · TITLE 24 COMPLIANT

6″ Unique™ Diecast Trims for Poplar™ Module

	Description	CAT. #	Specs
	6″ Round Reflector 7 ½″ O.D. - 6″ I.D.	ELL6810W	All White
		ELL6810B	All Black
		ELL6810BZ	All Bronze
	6″ Round Baffle 7 ½″ O.D. - 6″ I.D.	ELL6813W	All White
		ELL6813B	All Black
		ELL6813BZ	All Bronze
	6″ Round Wall Wash 7 ½″ O.D. - 6″ I.D.	ELL6815W	All White
		ELL6815B	All Black
		ELL6815BZ	All Bronze

Accessories for Retrofits

	Description	CAT. #	Specs
	E26 Medium Base Adapter	PSA30	Med. base to LED Quick Connect
	GU10 Base Adapter	PSA31	GU10 to LED Quick Connect

The **Alder System**

2″ **Housings** & LED **Light Engines**



ALDER SYSTEM	STYLES	LUMENS	COLOR TEMPERATURE
HIGHTECH	Round, Square	650 lm to 1100 lm	2700K & 4000K
STANDARDLUMEN	Round Adjustable, Square Adjustable		

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Alder™ **System**

2″ LED Lighting Solution

93+ CRI · IC RATED · IN TODAY OUT TODAY · 50K HRS 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE

2″ LED Housings & Light Engines

	Description		Cat. #	Specs
	2″ IC Airtight New Construction LED Housing with Driver		E2LC106ICA	9W, 120V, Triac/ELV. 4″ Height
	2″ ICA New Construction LED Housing with Driver		E2LC175ICA	9W, 120V, Triac/ELV. 3 ½″ Height
	2″ Non-IC New Construction LED Housing with Driver		E2LC106	9W, 120V, Triac/ELV. 3 ½″ Height
	2″ ICA Remodel LED Housing with Driver		E2LC175RICA	9W, 120V, Triac/ELV. 3 ½″ Height
	2″ Non-IC Remodel LED Housing with Driver		E2LRC106	9W, 120V, Triac/ELV. 3 ½″ Height
	2″ LED Reflector 3 ⅛″ O.D. - 2″ I.D. - 2 ⅝″ H	WET LOCATION	E210C0627W	9W, 600 lm, 2700K
			E210C0630W	9W, 640 lm, 3000K
	2″ HIGHLUMEN LED Reflector	WET LOCATION	E210C0727W	9W, 800 lm, 2700K
			E210C0730W	9W, 840 lm, 3000K
			E210C0735W	9W, 860 lm, 3500K
			E210C0740W	9W, 875 lm, 4000K
	2″ LED Baffle 3 ⅛″ O.D. - 2″ I.D. - 2 ⅝″ H	WET LOCATION	E214C0627W	9W, 600 lm, 2700K
			E214C0630W	9W, 640 lm, 3000K
	2″ HIGHLUMEN LED Baffle	WET LOCATION	E214C0727W	9W, 800 lm, 2700K
			E214C0730W	9W, 840 lm, 3000K
			E214C0735W	9W, 860 lm, 3500K
			E214C0740W	9W, 875 lm, 4000K
	2″ LED Square Reflector 3 ⅛″ Sq. - 1 ½″ Sq. - 2 ½″ H	WET LOCATION	E213C0627W	9W, 600 lm, 2700K
			E213C0630W	9W, 640 lm, 3000K
	2″ HIGHLUMEN LED Square Reflector	WET LOCATION	E213C0727W	9W, 800 lm, 2700K
			E213C0730W	9W, 840 lm, 3000K
			E213C0735W	9W, 860 lm, 3500K
			E213C0740W	9W, 875 lm, 4000K
	2″ LED Square Baffle 3 ⅛″ Sq. - 1 ½″ Sq. - 2 ½″ H	WET LOCATION	E215C0627W	9W, 600 lm, 2700K
			E215C0630W	9W, 640 lm, 3000K
	2″ HIGHLUMEN LED Square Baffle	WET LOCATION	E215C0727W	9W, 800 lm, 2700K
			E215C0730W	9W, 840 lm, 3000K
			E215C0735W	9W, 860 lm, 3500K
			E215C0740W	9W, 875 lm, 4000K
	2″ LED Adjustable 3 ⅛″ Sq. - 1 ⅝″ H - 25° tilt	DAMP LOCATION	E218C0627W	9W, 600 lm, 2700K
			E218C0630W	9W, 640 lm, 3000K
	2″ HIGHLUMEN LED Adjustable	DAMP LOCATION	E218C0727W	9W, 800 lm, 2700K
			E218C0730W	9W, 840 lm, 3000K
			E218C0735W	9W, 860 lm, 3500K
			E218C0740W	9W, 875 lm, 4000K
	2″ LED Square Adjustable 3 ⅛″ Sq. - 1 ¾″ H - 25° tilt	DAMP LOCATION	E219C0627W	9W, 600 lm, 2700K
			E219C0630W	9W, 640 lm, 3000K
	2″ HIGHLUMEN LED Square Adjustable	DAMP LOCATION	E219C0727W	9W, 800 lm, 2700K
			E219C0730W	9W, 840 lm, 3000K
			E219C0735W	9W, 860 lm, 3500K
			E219C0740W	9W, 875 lm, 4000K

The Alder™ **System**


2″ LED Lighting Solution

93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE


2″ LED HighTech Housings & Light Engines

	Description	Cat. #	Specs
	2″ HIGHTECH IC Airtight New Construction Housing	E2AJU12ICA	11W, 120/277V. 5 ½″ Height
	2″ HIGHTECH New Construction Housing	E2LCU86ICA	11W, 120/277V, 0-10V/Triac/ELV. 3 ½″ Height
		E2LC185ICA	11W, 120V, Triac/ELV
	2″ HIGHTECH Remodel Housing	E2LCU86RICA	11W, 120/277V, 0-10V/Triac/ELV. 3 ½″ Height
		E2LC185RICA	11W, 120V, Triac/ELV
	2″ HIGHLUMEN Round LED Reflector 3 ⅛″ O.D. - 2″ I.D. - 2 ⅝″ H WET LOCATION	E210C1827W	11W, 1000 lm, 2700K
		E210C1830W	11W, 1050 lm, 3000K
		E210C1835W	11W, 1100 lm, 3500K
		E210C1840W	11W, 1135 lm, 4000K
		E210C18SDW	11W, 800 lm, Sunset
	2″ HIGHLUMEN Round LED Baffle 3 ⅛″ O.D. - 2″ I.D. - 2 ⅝″ H WET LOCATION	E214C1827W	11W, 1000 lm, 2700K
		E214C1830W	11W, 1050 lm, 3000K
		E214C1835W	11W, 1100 lm, 3500K
		E214C1840W	11W, 1135 lm, 4000K
		E214C18SDW	11W, 800 lm, Sunset
	2″ HIGHLUMEN Square LED Reflector 3 ⅛″ Sq. - 1 ½″ Sq. - 2 ½″ H WET LOCATION	E213C1827W	11W, 1000 lm, 2700K
		E213C1830W	11W, 1040 lm, 3000K
		E213C1835W	11W, 1100 lm, 3500K
		E213C1840W	11W, 1125 lm, 4000K
		E213C18SDW	11W, 800 lm, Sunset
	2″ HIGHLUMEN Square LED Baffle 3 ⅛″ Sq. - 1 ½″ Sq. - 2 ½″ H WET LOCATION	E215C1827W	11W, 1000 lm, 2700K
		E215C1830W	11W, 1040 lm, 3000K
		E215C1835W	11W, 1100 lm, 3500K
		E215C1840W	11W, 1125 lm, 4000K
		E215C18SDW	11W, 800 lm, Sunset
	2″ HIGHLUMEN LED Round Adjustable 3 ⅛″ Sq. - 1 ⅝″ H - 25° tilt DAMP LOCATION	E218C1827W	11W, 1040 lm, 2700K
		E218C1830W	11W, 1100 lm, 3000K
		E218C1835W	11W, 1150 lm, 3500K
		E218C1840W	11W, 1200 lm, 4000K
		E218C18SDW	11W, 800 lm, Sunset
	2″ HIGHLUMEN LED Square Adjustable 3 ⅛″ Sq. - 1 ¾″ H - 25° tilt DAMP LOCATION	E219C1827W	11W, 1030 lm, 2700K
		E219C1830W	11W, 1090 lm, 3000K
		E219C1835W	11W, 1140 lm, 3500K
		E219C1840W	11W, 1190 lm, 4000K
		E219C18SDW	11W, 800 lm, Sunset


Dedicated LED Housings & Inserts

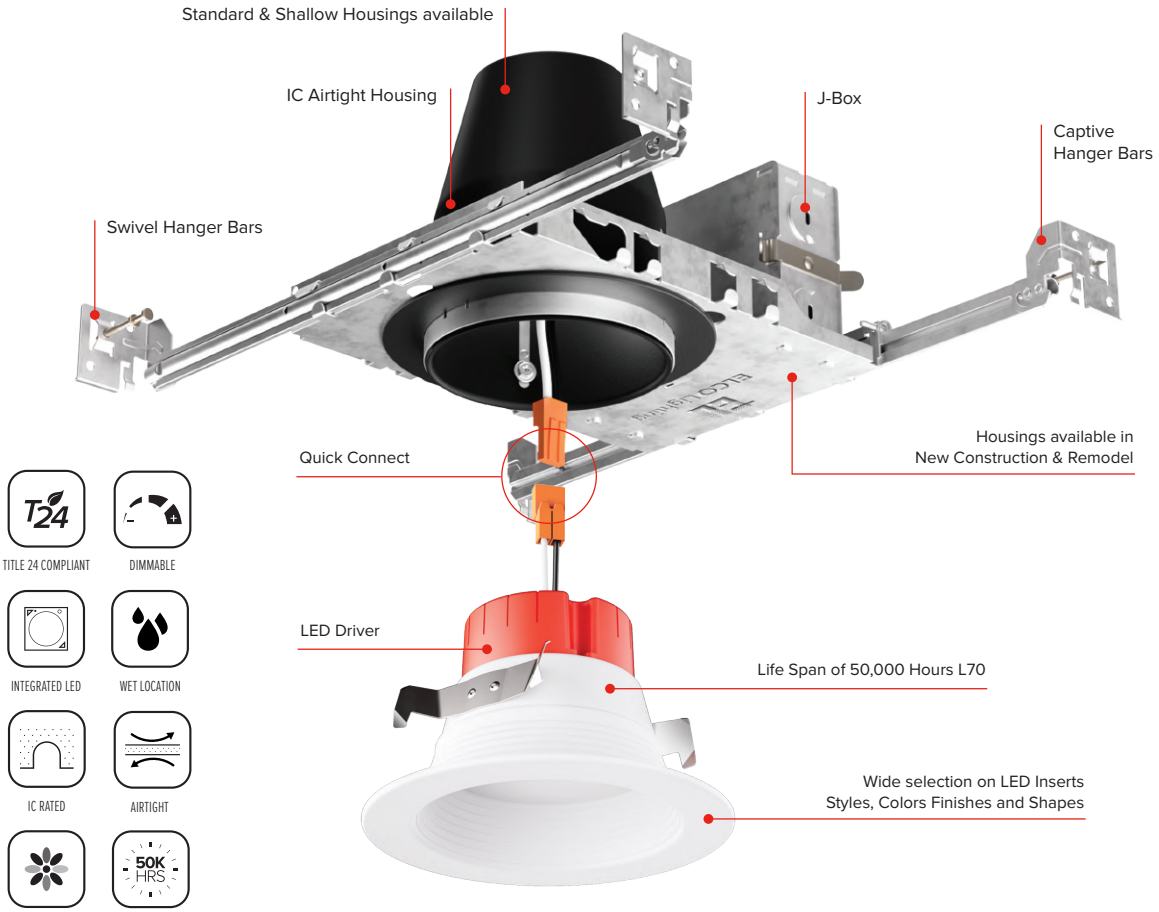


SIZES

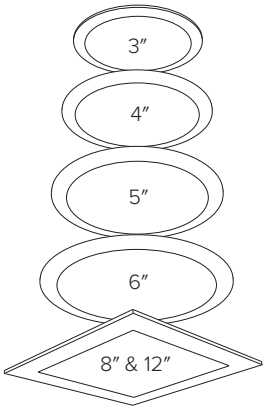

STYLES



Round
(Reflector & Baffle)



Square
(Reflector & Baffle)




Adjustable
Pull Down



Gimbal

LUMENS



600 lm to 2000 lm

COLOR TEMPERATURE



2700K - 5000K
& Sunset

LED **Dedicated**

TITLE 24 COMPLIANT · DIMMABLE · 90+ CRI · IC RATED · IN TODAY OUT TODAY · 50,000 HOURS

3″ LED Housings & Inserts

	Description	CAT. #	Specs
	3″ Shallow Max. Adjustability IC Airtight New Construction Housing Opening: 3 ⅞″ - 3 ½″ H	EL362ICA	120V
	3″ New Construction IC Airtight Dedicated LED Housing Opening: 3 ⅝″ - 5 ½″ H	EL390ICA	120V
		EL390ICA-7	Step-down transformer 277V to 120V
		EL390ICA-EM5	Emergency Battery Backup
	3″ Remodel IC Airtight Dedicated LED Housing Opening: 3 ⅝″ - 5 ½″ H	EL390RICA	120V
	3″ New Construction IC Airtight Housings for 2-Hour Fire Rated Ceilings Opening: 3 ⅞″ - 4″ H FIRE RATED	EL386JBICA	120V
	3″ New Construction Dedicated LED 2-Hour Fire Rated Housing Opening: 3 ½″ - 7 ¾″ H - STC/IIC Sound Rated FIRE RATED	EL39FICA	120V
		EL39FICA-7	Step-down transformer 277V to 120V
	3″ Round LED Baffle 4 ⅜″ O.D. - 3 ⅛″ H CCT SWITCH · WET LOCATION	EL311CT5W	120V, 9W, 710 lm, 2700K - 5000K
	3″ Round LED Reflector 4 ⅜″ O.D. - 3 ⅛″ H CCT SWITCH · WET LOCATION	EL312CT5W	120V, 9W, 710 lm, 2700K - 5000K
		EL312CT5BZ	120V, 9W, 710 lm, 2700K - 5000K
	3″ Round LED Gimbal 4 ⅜″ O.D. - 2 13⁄16″ O.D. - 2 5⁄16″ H CCT SWITCH · DAMP LOCATION	EL313CT5W	120V, 8W, 820 lm, 2700K - 5000K
	3″ HIGHLUMEN Round LED Reflector 4 ⅜″ O.D. - 3 ⅛″ H CCT SWITCH · WET LOCATION	EL317CT5W	120V, 11W, 1040 lm, 2700K - 5000K

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

LED **Dedicated**

TITLE 24 COMPLIANT | DIMMABLE | 90+ CRI | IC RATED | IN TODAY OUT TODAY | 50,000 HOURS

3″ LED Housings & Inserts

	Description	CAT. #	Specs
	3″ Square LED Baffle 4 ⅜″ Sq. - 2 ¾″ H	EL331CT5W	120V, 9W, 700 lm, 2700K - 5000K
	3″ Square LED Reflector 4 ⅜″ Sq. - 2 ¾″ H	EL332CT5W	120V, 9W, 640 lm, 2700K - 5000K
		EL332CT5BB	120V, 9W, 640 lm, 2700K - 5000K


4″ LED Housings

	Description	CAT. #	Specs
	4″ IC Airtight New Construction Housing Opening: 4″ - 5 ½″ H	EL490ICA	120-277V
		EL490ICA-7	Step-down transformer 277V to 120V
		EL490ICA-EM5	Emergency Battery Backup
	4″ Remodel Dedicated LED Housing Opening: 4″ - 5 ½″ H	EL490RICA	120-277V
	4″ IC Airtight Shallow New Construction Housing Opening: 4 ¼″ - 3 ½″ H	EL492ICA	120-277V
		EL492ICA-7	Step-down transformer 277V to 120V
	4″ Remodel Dedicated LED Housing Opening: 4 ¼″ - 3 ½″ H	EL492RICA	120-277V
	**R-60 Foam Insulation** Dedicated LED IC Airtight New Construction Housing Opening: 4 ¼″ - 5 ½″ H	EL490AJICA	120-277V

LED **Dedicated**

TITLE 24 COMPLIANT · DIMMABLE · 90+ CRI · IC RATED · IN TODAY OUT TODAY · 50,000 HOURS

4″ LED Housings & Inserts

	Description		CAT. #	Specs
	4″ LED Fire Rated ICA New Construction Housing Opening: 4 ¼″ - 6 ⅞″ H - STC/IIC Sound Rated	FIRE RATED	EL48FICA	120-277V
	4″ LED Shallow Fire Rated ICA New Construction Housing Opening: 4 ⅜″ - 4 $^{13}/_{16}$″ H	FIRE RATED	EL492FICAS	120-277V, Shallow
	4″ New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings Opening: 4 ⅛″ - 4″ H	FIRE RATED	EJB483ICA	120-277V
	A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714			
	4″ New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings Opening: 4″ - 4 ⅝″ H	FIRE RATED	EJB4ICA	New Construction Housing with quick connector for 2-Hour Fire Rated ceilings.
	A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714			
	4″ Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings Opening: 4″ - 4 ½″ H	FIRE RATED	EJB4RICA	120-277V
	A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714			
	4″ New Construction IC Airtight Housing Jbox for 2-Hour Fire Rated Ceilings Opening: 4″ - 4 ⅝″ H	FIRE RATED	EJB475ICA	120-277V
	**Concrete Pour** 4″ IC Airtight 2-Hour Fire Junction Box Opening: 4″ - 4 ½″ H		EJB4CNC	120-277V
	4″ Round LED Reflector Insert 5 ½″ O.D. - 2 ¾″ H	CCT SWITCH WET LOCATION	EL455CT5W	120V, 9W, 600 lm, 2700K - 5000K
	4″ Round Sunset Dimming LED Reflector (Automatically Dims from 3000K to 1800K on standard dimmer) 5 ½″ O.D. - 3″ H	DIMS TO WARM SUNSET DIMMING TECHNOLOGY WET LOCATION	EL415SDW EL415SDBZ	120V, 10W, 700 lm, Sunset 120V, 10W, 700 lm, Sunset

LED **Dedicated**

TITLE 24 COMPLIANT · DIMMABLE · 90+ CRI · IC RATED · IN TODAY OUT TODAY · 50,000 HOURS

4" LED Inserts

	Description	CAT. #	Specs
	4" Round LED Reflector 5 ½" O.D. - 3 ⅜" H WET LOCATION · CCT SWITCH	EL41527W	120V, 11W, 770 lm, 2700K
		EL41530W	120V, 11W, 770 lm, 3000K
		EL41535W	120V, 11W, 770 lm, 3500K
		EL41535BZ	120V, 11W, 770 lm, 3500K
		EL41540W	120V, 11W, 770 lm, 4000K
		EL41550W	120V, 11W, 770 lm, 5000K
		EL415CT5W	120V, 12W, 800 lm, 2700K - 5000K
		EL415CT5BZ	120V, 12W, 800 lm, 2700K - 5000K
		EL415CT5BB	120V, 12W, 800 lm, 2700K - 5000K
	4" HIGHLUMEN Round LED Reflector 5 ½" O.D. - 3" H WET LOCATION · CCT SWITCH	EL41740W	120V, 14W, 1200 lm, 4000K
		EL417CT5W	120V, 14W, 1000 lm2700K - 5000K
		EL417CT5BB	120V, 14W, 1000 lm2700K - 5000K
	4" HIGHLUMEN Round Haze Reflector 5 ½" O.D. - 3" H WET LOCATION · CCT SWITCH	EL41735H	120V, 14W, 1100 lm, 3500K
		EL41740H	120V, 14W, 1200 lm, 4000K
		EL417CT5H	120V, 14W, 1000 lm, 2700K - 5000K
	4" HIGHLUMEN Round Chrome Reflector 5 ½" O.D. - 3" H WET LOCATION	EL41727C	120V, 14W, 1000 lm, 2700K
		EL41740C	120V, 14W, 1200 lm, 4000K
	4" Round LED Reflector with 5-CCT & Lumen Switch 5 ½" O.D. - 4" H CCT SWITCH · LUMEN Switch · WET LOCATION	EL427CT5W	120V, 12.5W - 18W, 1000 lm - 1500 lm, 2700K - 5000K
		EL427CT5BB	120V, 12.5W - 18W, 1000 lm - 1500 lm, 2700K - 5000K
		EL427CT5HW	120V, 12.5W - 18W, 1000 lm - 1500 lm, 2700K - 5000K
	4" 0-10V Round LED Reflector with 5-CCT & Lumen Switch 5 ½" O.D. - 4 ⅛" H CCT SWITCH · LUMEN Switch · WET LOCATION	EL475CT5DW	120-277V, 9.3W-18W, 850 lm - 1500 lm, 2700K - 5000K
		EL475CT5DBB	120-277V, 9.3W-18W, 850 lm - 1500 lm, 2700K - 5000K
		EL475CT5DH	120-277V, 9.3W-18W, 850 lm - 1500 lm, 2700K - 5000K
		EL475CT5DHW	120-277V, 9.3W-18W, 850 lm - 1500 lm, 2700K - 5000K
	4" Round Sunset Dimming LED Baffle (Automatically Dims from 3000K to 1800K on standard dimmer) 5 ½" O.D. - 3" H WET LOCATION · DIMS TO WARM SUNSET DIMMING TECHNOLOGY	EL410SDW	120V, 10W, 700 lm, Sunset
	4" Round LED Baffle 5 ½" O.D. - 3" H WET LOCATION · CCT SWITCH	EL41027W	120V, 10W, 800 lm, 2700K
		EL41030W	120V, 10W, 850 lm, 3000K
		EL41035W	120V, 10W, 900 lm, 3500K
		EL41040W	120V, 10W, 900 lm, 4000K
		EL410CT5W	120V, 12W, 850 lm, 2700K - 5000K
		EL410CT5BB	120V, 12W, 850 lm, 2700K - 5000K
	4" HIGHLUMEN LED Baffle 5 ½" O.D. - 3 ⅜" H CCT SWITCH · WET LOCATION	EL412CT5W	120V, 14W, 1000 lm, 2700K - 5000K

LED **Dedicated**

TITLE 24 COMPLIANT · DIMMABLE · 90+ CRI · IC RATED · IN TODAY OUT TODAY · 50,000 HOURS

4" LED Inserts

	Description	CAT. #	Specs
	4" Round 5-CCT LED Shallow Baffle Insert 5 ½" O.D. - 2 ¾" H CCT SWITCH · WET LOCATION	EL460CT5W	120V, 9W, 600 lm, 2700K - 5000K
	4" Round LED Reflector 5 ⅛" O.D. - 3 ⅛" H CCT SWITCH · WET LOCATION	EL431CT5W	120V, 12W, 850 lm, 2700K - 5000K Narrow Lip
	4" Round LED Baffle 5 ⅛" O.D. - 3 ⅛" H CCT SWITCH · WET LOCATION	EL439CT5W	120V, 12W, 850 lm, 2700K - 5000K Narrow Lip
	4" Round LED Baffle Eyeball 5" O.D. - 3 5⁄16" H - 25° tilt CCT SWITCH · WET LOCATION	EL414CT5W	120V, 12W, 650 lm, 2700K - 5000K
		EL414CT5B	120V, 12W, 650 lm, 2700K - 5000K
		EL414CT5BZ	120V, 12W, 650 lm, 2700K - 5000K
	4" Round LED Gimbal 5" O.D. - 3 ⅜" I.D. - 3 ½" H - 25° tilt CCT SWITCH · DAMP LOCATION	EL416CT5W	120V, 8W, 840 lm, 2700K - 5000K
		EL416CT5B	120V, 8W, 840 lm, 2700K - 5000K
		EL416CT5BZ	120V, 8W, 840 lm, 2700K - 5000K
	4" HIGHLUMEN LED Gimbal 5" O.D. - 3 ⅜" I.D. - 3 ½" H - 25° tilt DAMP LOCATION	EL416HLCT5W	120V, 12W, 1300 lm, 2700K - 5000K
	4" Round LED Floating Adjustable Eyeball (90° tilt) 5" O.D. - 3 ½" I.D. - 3 ¼" H 90° tilt - 360° rotation NEW! CCT SWITCH · DAMP LOCATION	EL456CT5W	120V, 9W, 700 lm, 2700K - 5000K
		EL456CT5B	120V, 9W, 700 lm, 2700K - 5000K
	4" Square LED Reflector Insert with 5-CCT Switch 4 ⅞" Sq. - 2 ¾" Sq. - 4 ¼" H NEW! CCT SWITCH · DAMP LOCATION	EL434CT5W	120V, 10W, 1000 lm, 2700K - 5000K
		EL434CT5BB	120V, 10W, 1000 lm, 2700K - 5000K
	4" 0-10V Square LED Reflector Insert with 5-CCT and 3-Lumen Switch 4 ⅞" Sq. - 2 ¾" Sq. - 4 ¼" H LUMEN Switch CCT SWITCH · DAMP LOCATION	EL487CT5W	120V, 10W-18W, 1000lm-1800lm, 2700K-5000K
		EL487CT5BB	120V, 10W-18W, 1000lm-1800lm, 2700K-5000K
	4" Square LED Gimbal 5" Sq. - 3" H - 25° tilt CCT SWITCH · DAMP LOCATION	EL446CT5W	120V, 9W, 700 lm, 2700K - 5000K
		EL446CT5B	120V, 9W, 700 lm, 2700K - 5000K
		EL446CT5BZ	120V, 9W, 700 lm, 2700K - 5000K
	4" HIGHLUMEN Square LED Gimbal	EL446HLCT5W	120V, 12W, 1300 lm, 2700K - 5000K

LED **Dedicated**



TITLE 24 COMPLIANT · DIMMABLE · 90+ CRI · IC RATED · IN TODAY OUT TODAY · 50,000 HOURS

4″ LED Inserts

	Description	CAT. #	Specs
	4″ Square LED Baffle 5″ Sq. - 2 ½″ H CCT SWITCH · WET LOCATION	EL441CT5W	120V, 11W, 750 lm, 2700K - 5000K
		EL441CT5BZ	120V, 11W, 750 lm, 2700K - 5000K
	4″ Square LED Reflector 5″ Sq. - 3 ⅛″ H CCT SWITCH · WET LOCATION	EL442CT5W	120V, 11W, 850 lm, 2700K - 5000K
		EL442CT5BB	120V, 11W, 850 lm, 2700K - 5000K
		EL442CT5BZ	120V, 11W, 750 lm, 2700K - 5000K
	DIMS TO WARM SUNSET DIMMING TECHNOLOGY 4″ Round LED Adjustable Pull-Down Insert (2nd Generation) Includes 28°, 40° & 60° lenses. 5″ O.D. - 4 ⅜″ H - 80˚ tilt CCT SWITCH · DAMP LOCATION	EL497SDW2	120V, 11W, 950 lm, Sunset
		EL497CT5W2	120V, 12W, 950 lm, 2700K - 5000K
		EL497CT5B2	120V, 12W, 950 lm, 2700K - 5000K
	4″ Square LED Adjustable Pull-Down Insert (2nd Generation) Includes 28°, 40° & 60° lenses. 5″ Sq. - 4 ⅜″ H - 80˚ tilt CCT SWITCH · DAMP LOCATION	EL447CT5W2	120V, 12W, 950 lm, 2700K - 5000K
		EL447CT5B2	120V, 12W, 950 lm, 2700K - 5000K

LED **Dedicated**

5″ & 6″ LED Housings & Inserts

	Description	CAT. #	Specs
	5″ Dedicated LED IC Airtight New Construction Housings Opening: 5 ½″ - 7 ½″ H	EL570ICA	120-277V
		EL570ICA-7	Step-down transformer 277V to 120V
		EL560ICA	120-277V, Shallow
	5″ Dedicated LED IC Airtight Remodel Housings Opening: 5 ½″ - 7 ½″ H	EL570RICA	120-277V
		EL560RICA	120-277V, Shallow
	5″ New Construction IC Airtight 2-Hour Fire Rated Housing Opening: 5 ½″ - 7 ¾″ H - STC/ICC Sound Rated FIRE RATED	EL56FICA	120-277V
 ICDXA	6″ Dedicated LED IC Airtight New Construction Housings Opening: 6 ¼″ - 7″ H	EL770ICA	120-277V
		EL770ICA-7	Step-down transformer 277V to 120V
		EL770ICA-EM5	Emergency Back-Up, 120-277V
		EL770ICDXA	120-277V with 0-10V wiring
 ICDXA	6″ Shallow Dedicated LED IC Airtight New Construction Housings Opening: 6 ¼″ - 5 ½″ H	EL760ICA	120-277V, Shallow
		EL760ICA-7	Step-down transformer 277V to 120V
		EL760ICDXA	120-277V with 0-10V wiring
	6″ Dedicated LED IC Airtight Remodel Housings Opening: 6 ½″ - 7 ½″ H	EL770RICA	120-277V
		EL760RICA	120-277V, Shallow
	6″ New Construction IC Airtight 2-Hour Fire Rated Housing Opening: 6 ⅜″ - 7 ¾″ H - STC/ICC Sound Rated FIRE RATED	EL76FICA	120-277V
		EL76FICA-7	Step-down transformer 277V to 120V
		EL75FICAS	120-277V, Shallow
	5″- 6″ LED Reflector Insert 7 ¼″ O.D. - 2 ¾″ H CCT SWITCH WET LOCATION	EL655CT5W	10W, 700 lm, 2700K - 5000K
	5″- 6″ LED Reflector 7 ¼″ O.D. - 3″ H WET LOCATION	EL61527W	120V, 10W, 800 lm, 2700K
		EL61530W	120V, 10W, 850 lm, 3000K
		EL61535W	120V, 10W, 850 lm, 3500K
		EL61540W	120V, 10W, 900 lm, 4000K
		EL61550W	120V, 10W, 950 lm, 5000K
	5″- 6″ LED Reflector with 5-CCT Switch 7 ¼″ O.D. - 3″ H CCT SWITCH WET LOCATION	EL615CT5W	120V, 12W, 880 lm - 1080 lm, 2700K - 5000K
		EL615CT5BB	120V, 12W, 880 lm - 1080 lm, 2700K - 5000K
		EL615CT5BZ	120V, 12W, 880 lm - 1080 lm, 2700K - 5000K

LED **Dedicated**

TITLE 24 COMPLIANT · DIMMABLE · 90+ CRI · IC RATED · IN TODAY OUT TODAY · 50,000 HOURS

5″ & 6″ LED Inserts

	Description		CAT. #	Specs
	5″- 6″ HIGHTECH - LED Reflector 7 ¼″ O.D. - 3″ H	WET LOCATION	EL61740W	120V, 14W, 1200 lm, 4000K
	5″- 6″ HIGHTECH - LED Reflector with 5-CCT Switch 7 ¼″ O.D. - 3″ H	CCT SWITCH · WET LOCATION	EL617CT5W	120V, 17W, 1100 lm, 2700K - 5000K
	EXTRA 5″- 6″ HIGHLUMEN - LED Reflector 7 ¼″ O.D. - 3″ H	WET LOCATION	EL62727W	120V, 20W, 1400 lm, 2700K
	5″- 6″ LED Reflector with 5-CCT Switch	CCT SWITCH · WET LOCATION	EL627CT5W	120V, 20W, 1400 lm, 2700K - 5000K
	5″- 6″ HIGHLUMEN - LED Deep Reflector 7 ½″ O.D. - 4 ⅜″ H	CCT SWITCH · WET LOCATION	EL625CT5W	120V, 15W, 1000 lm, 2700K - 5000K
	5″- 6″ HIGHLUMEN - Haze LED Deep Reflector 7 ½″ O.D. - 4 ⅜″ H	WET LOCATION	EL62527H	Haze, 120V, 14W, 1000 lm, 2700K
			EL62535H	Haze, 120V, 14W, 1100 lm, 3500K
			EL62540H	Haze, 120V, 14W, 1200 lm, 4000K
		CCT SWITCH	EL625CT5H	Haze, 120V, 15W, 1000 lm, 2700K - 5000K
	5″- 6″ HIGHLUMEN - Chrome LED Deep Reflector 7 ½″ O.D. - 4 ⅜″ H	WET LOCATION	EL62535C	Chrome, 120V, 14W, 1100 lm, 3500K
			EL62540C	Chrome, 120V, 14W, 1200 lm, 4000K
		CCT SWITCH	EL625CT5C	Chrome, 120V, 15W, 1000 lm, 2700K - 5000K
	5″- 6″ Round LED Reflector with 5-CCT & 3-Lumen Switch 7 ½″ O.D. - 5″ H	WET LOCATION · LUMEN Switch · CCT SWITCH	EL637CT5W	White, 120V, 1000 lm - 2000 lm, 2700K - 5000K
			EL637CT5BB	Black, 120V, 1000 lm - 2000 lm, 2700K - 5000K
			EL637CT5HW	Haze, 120V, 1000 lm - 2000 lm, 2700K - 5000K
	6″ 0-10V Round LED Reflector with 5-CCT & 3-Lumen Switch 7 ½″ O.D. - 5″ H	WET LOCATION · CCT SWITCH · LUMEN Switch	EL685CT5DW	White, 120-277V, 1000 lm - 2000 lm, 2700K - 5000K
			EL685CT5DBB	Black, 120-277V, 1000 lm - 2000 lm, 2700K - 5000K
			EL685CT5DH	Haze, 120-277V, 1000 lm - 2000 lm, 2700K - 5000K
			EL685CT5DHW	Haze/White Trim, 120-277V, 1000 lm - 2000 lm, 2700K - 5000K
			EL685CT5DCW	Chrome/White Trim, 120-277V, 1000 lm - 2000 lm, 2700K - 5000K
	5″- 6″ Round Sunset Dimming LED Insert (Automatically Dims from 3000K to 1800K on standard dimmer) 7 ½″ O.D. - 3″ H	WET LOCATION · DIMS TO WARM SUNSET DIMMING TECHNOLOGY	EL610SDW	120V, 10W, 750 lm, Sunset, Baffle
			EL615SDW	120V, 10W, 750 lm, Sunset, Reflector
			EL615SDBZ	120V, 10W, 750 lm, Sunset, Reflector

LED **Dedicated**

TITLE 24 COMPLIANT | DIMMABLE | 90+ CRI | IC RATED | IN TODAY OUT TODAY | 50,000 HOURS

5″ & 6″ LED Inserts

	Description		CAT. #	Specs
	5″- 6″ LED Baffle 7 ½″ O.D. - 3″ H	WET LOCATION	EL61027W	120V, 12W, 800 lm, 2700K
			EL61030W	120V, 12W, 850 lm, 3000K
	5″- 6″ Round LED Baffle with 5-CCT Switch 7 ¼″ O.D. - 3″ H	CCT SWITCH, WET LOCATION	EL610CT5W	120V, 12W, 880 lm - 1080 lm, 2700K - 5000K
			EL610CT5BB	120V, 12W, 880 lm - 1080 lm, 2700K - 5000K
	5″- 6″ HIGHLUMEN LED Baffle 7 ½″ O.D. - 3″ H	WET LOCATION	EL61140W	120V, 14W, 1200 lm, 4000K
	5″- 6″ HIGHLUMEN Round LED Baffle with 5-CCT Switch 7 ¼″ O.D. - 3″ H	CCT SWITCH, WET LOCATION	EL611CT5W	120V, 17W, 1100 lm, 2700K - 5000K
			EL612CT5W	120V, 20W, 1400 lm, 2700K - 5000K
	6″ Round 5-CCT LED Baffle Insert with Adapter 7 ¼″ O.D. - 2 ¾″ H	CCT SWITCH, WET LOCATION	EL670CT5W	120V, 10W, 700 lm, 2700K - 5000K
	6″ LED Regressed Gimbal Insert 7 ¼″ O.D. - 3 ½″ H - 25° tilt	CCT SWITCH, DAMP LOCATION	EL613CT5W	120V, 13W, 1000 lm, 2700K - 5000K
			EL613CT5B	120V, 13W, 1000 lm, 2700K - 5000K
	5″- 6″ LED Gimbal Insert 7 ¼″ O.D. - 3 ½″ H - 25° tilt	CCT SWITCH, DAMP LOCATION	EL616CT5W	120V, 13W, 1000 lm, 2700K - 5000K
			EL616CT5B	120V, 13W, 1000 lm, 2700K - 5000K
			EL616CT5BZ	120V, 13W, 1000 lm, 2700K - 5000K
	5″- 6″ LED HIGHLUMEN Deep Baffle Insert 7 ½″ O.D. - 4 ⅜″ H	CCT SWITCH, WET LOCATION	EL621CT5W	120V, 15W, 1000 lm, 2700K - 5000K
	5″ LED Square Reflector 6 ½″ Sq. - 3″ H	CCT SWITCH, WET LOCATION	EL552CT5W	120V, 15W, 1100 lm, 2700K - 5000K
	6″ LED Square Reflector 7 ¼″ Sq. - 3″ H	CCT SWITCH, WET LOCATION	EL662CT5W	120V, 16W, 1300 lm, 2700K - 5000K
	6″ LED Square Baffle 7 ¼″ Sq. - 3″ H	CCT SWITCH, WET LOCATION	EL661CT5W	120V, 16W, 1300 lm, 2700K - 5000K

LED **Dedicated**

TITLE 24 COMPLIANT · DIMMABLE · 90+ CRI · IC RATED · IN TODAY OUT TODAY · 50,000 HOURS

5″ & 6″ LED Housings & Inserts

	Description	CAT. #	Specs
	5″ Pull Down Adjustable (2nd Generation) 6 ¼″ O.D. - 4 ⅛″ H - 65˚ tilt CCT SWITCH · DAMP LOCATION	EL597CT5W2	120V, 12.6W, 840 lm, 2700K - 5000K
		EL597CT5B2	120V, 12.6W, 840 lm, 2700K - 5000K
		EL597CT5BZ2	120V, 12.6W, 840 lm, 2700K - 5000K
	6" Pull-Down Adjustable (2nd Generation) 7 ¼″ O.D. - 4 ⅜″ H - 80˚ tilt CCT SWITCH · WET LOCATION	EL697CT5W2	120V, 12W, 950 lm, 2700K - 5000K
		EL697CT5B2	120V, 12W, 950 lm, 2700K - 5000K
		EL697CT5BZ2	120V, 12W, 950 lm, 2700K - 5000K

8″ & 12″ LED Square Retrofit

	Description	CAT. #	Specs
	8" Square Incandescent IC Single Wall Aluminum New Construction Housing 8 ½″ Sq. - 4 ⅝″ H DAMP LOCATION	EL8SQ	120V
	8" Square Incandescent IC Airtight Single Wall Aluminum New Construction Housing 8 ½″ Sq. - 7 ¼″ H DAMP LOCATION	EL8SQICA	120V
	8″ Square LED Retrofit Insert with 5-CCT Switch 9 ⅜″ Sq. - 1 ¼″ H Perfect for retrofitting existing 8″ Square Housings CCT SWITCH · WET LOCATION	EL881CT5W	18W, 1460 lm - 1530 lm, 2700K - 5000K, 120V, Triac/ELV
	12″ Square LED Retrofit with 5-CCT Switch 12″ Sq. - ⅝″ H For existing 12″ square housings CCT SWITCH · WET LOCATION	EL1212CT5W	22W, 1450 lm, 2700K - 5000K, 120V, Triac/ELV


Specialty **Retrofits**

4″ LED BiPin Low Voltage Retrofits


	Description	CAT. #	Specs
	4″ LED Low Voltage Retrofit Baffle 5 ⅛″ O.D. - 3 ½″ H	EL140CT5W	9W, 600 lm, 2700K - 5000K, 12V AC
	4″ LED Low Voltage Retrofit Reflector 5 ⅛″ O.D. - 3 ½″ H	EL141CT5W	9W, 600 lm, 2700K - 5000K, 12V AC

** Fits in 13W, 18W, 26W - 4-Pin Connector to adapt to existing 4-Pin Socket (Electronic ballast CFL) included. 2-Pin Connector to adapt to 2-Pin Socket (Magnetic ballast CFL) sold separately**

4″ LED Insert & Junction Boxes for **2-Hour Fire Rated** Ceilings

	Description	CAT. #	Specs
	4″ Square Standard Deep Junction Box with Hanger Bars for use in Fire Rated Ceilings	EJB44ICA	IC Airtight for use in IC and Non-IC applications. 4″ Sq - 3 ½″ H
	4″ Square Standard Deep Junction Box for use in Fire Rated Ceilings	ELJ443	IC Airtight for use in IC and Non-IC applications. 4″ Sq - 3 ½″ H
	4″ LED Junction Box **1000 lm** Insert	ELJ42230W	15W, 1000 lm, 3000K 6″ O.D. - 2 ⅝″ H

Fire Rated Products

	Description	CAT. #	Specs
	1-Hour Fire Enclosure	FIREENCL	20 ⅜″ L - 14 ⅜″ W - 9″ H
		FIREENCL-S	Shallow, 16″ L - 14 ⅜″ W - 7 ¼″ H
	Mica Fire tape for use with FIREENCL	FIRETAPE	16′ Roll
	Recessed Fixture 2-Hour Fire Rated Cover	FIRECVR	Made of heat activated intumescent material. 17″ O.D. - 13″ I.D. - 9 ¾″ H

LED **Dedicated**



IC RATED | AIRTIGHT | DAMP LOCATION | WET LOCATION | IN TODAY OUT TODAY

Fire Rated Products

	Description	CAT. #	Specs
	2-Hour Fire Rated LED Housings with Quick Connect	EL39FICA	3″ LED Housing. 7 ¾″ Height
		EL48FICA	4″ LED Housing. 6 ⅞″ Height
		EL56FICA	5″ LED Housing. 7 ¾″ Height
		EL76FICA	6″ LED Housing. 7 ¾″ Height
	2-Hour Fire Rated Medium Base Housing with E26 Base Socket	EL99FICA	4″ LED Housing. 7 ¾″ Height
		EL5FICA	5″ LED Housing. 7 ¾″ Height
		EL7FICA	6″ LED Housing. 7 ¾″ Height
	2-Hour Fire Rated Housing with GU10 Socket	EL39FICA-GU10	3″ LED Housing. 7 ¾″ Height
		EL49FICA-GU10	4″ LED Housing. 7 ¾″ Height
	2-Hour Fire Rated Shallow Housing	EL492FICAS	4″ LED Shallow Housing 4 13⁄16″ Height
	2-Hour Fire Rated Shallow Housing	EL75FICAS	6″ LED, Shallow Housing 6 3⁄16″ Height

Emergency Battery Backups & Accessories

	Description	CAT. #	Specs
	Emergency Battery Backup (Double Whip - 90 Min. of Emergency Light) 11 1⁄8″ L - 2 5⁄8″ W - 1 5⁄8″ H	KEM-LD1	8W, Up to 750 lm EM output
		KEM-LD2	15W, Up to 1100 lm EM output
	Emergency Battery Backup (90 Min. of Emergency Light) 17 1⁄2″ L - 2 1⁄4″ W - 1 5⁄8″ H	KEM-LD5	25W, 120/277V, 50/60 Hz. Compatible with EL390, EL490, EL492, EL560, EL570, EL760, EL770 Series
	Emergency Battery Backup (90 Min. of Emergency Light) 13 3⁄4″ L - 2″ W - 1″ H	KEM-LD6	25W Max., 100/277V AC, 50/60 Hz. Compatible to all 3″-8″ Elm Fixtures (ERT3, ERT4, ERT6, & ERT8), Canless Koto System & Koto MAX System
	Emergency Battery Backup (90 Min. of Emergency Light) 15 1⁄2″ L - 2 1⁄8″ W - 1 5⁄8″ H	KEM-ERT	25W, 100/277V AC, 50/60 Hz. Compatible to all 3″-8″ Elm Fixtures (ERT3, ERT4, ERT6, & ERT8) & Canless Koto System
	Test Switch for KEM-LD1/2/3/4	T-SWITCH-LD1	for KEM-LD1, KEM-LD2, KEM-LD3, and KEM-LD4
	Test Switch for KEM-LD5	T-SWITCH-LD5	for KEM-LD5
	Standard Test Switch for KEM-LD6	T-SWITCH-LD6	for KEM-LD6
	Flat Test Switch for KEM-LD6	T-SWITCH-LD6-F	for KEM-LD6

The **Elm™ System**

Ultra Slim LED Panel Lights & LED Downlights

DESIGNED TO BE INSTALLED WITHOUT A RECESSED HOUSING!



New Construction application requires optional mounting plate or frame. Remodel application requires no additional accessories

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
2″ 3″ 4″ 6″ 8″	Round (2″, 3″, 4″, 6″ & 8″) Square (2″, 4″ & 6″)	White Black Bronze Nickel	350 lm to 2500 lm	2700K - 5000K

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

ELM™ System

2″-8″ Slim Panels

93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

Elm™ System LED Downlights

Description	CAT. #	Specs

2″ Elm™ System LED Downlights featuring 5-CCT Switch to choose desire color temperature (2700K-5000K), and maximum flexibility by mix-&-matching any round or square trim with desire reflector or baffle finish.

Step 1: Choose a Module



2″ LED Round Elm™ Downlight with 5-CCT Switch
3″ O.D. - 2″ I.D. - 2 ½″ H
CCT SWITCH | DAMP LOCATION

ERT2L06CT5 — 8W, 600 lm, 120V, 2700K - 5000K, Triac/ELV dimmable



2″ HIGHLUMEN LED Round Elm™ Downlight with 5-CCT Switch
3″ O.D. - 2″ I.D. - 4 ¼″ H
CCT SWITCH | DAMP LOCATION

ERT2HL08CT5 — 12W, 850 lm, 2700K - 5000K, 120V, Triac/ELV dimmable

ERT2HL10CT5 — 15W, 1000 lm, 2700K - 5000K, 120V, Triac/ELV dimmable

Step 2: Choose a Reflector or Baffle



Reflector for 2″ LED Elm™ Downlights
2 ¼″ O.D. - 1 15⁄16″ I.D. - 5⁄16″ H

ERT210W — White
ERT210B — Black
ERT210H — Haze
ERT210BZ — Bronze



Baffle for 2″ LED Elm™ Downlights
2 ¼″ O.D. - 1 15⁄16″ I.D. - 5⁄16″ H

ERT214W — White
ERT214B — Black
ERT214BZ — Bronze

Step 3: Choose a a Trim Ring



Round Flexa™ Trim Ring for 2″ Elm™ LED Downlights
3 ¼″ O.D. - 1 15⁄16″ I.D.

ERT2RW — White
ERT2RB — Black
ERT2RBZ — Bronze

Square Flexa™ Trim Ring for 2″ Elm™ LED Downlights
3 ¼″ Sq. - 1 15⁄16″ I.D.

ERT22SQW — White
ERT22SQB — Black

4″ Elm™ System LED Downlights featuring 5-CCT Switch to choose desire color temperature (2700K-5000K), Our NEW LED Light Engine and trims feature twist-on mechanism for easy installation.

Step 1: 4″ LED Module



4″ LED Round Elm™ Downlight with 5-CCT Switch
3 ⅛″ O.D. - 2 ⅜″ I.D. - 1 ⅞″ H
CCT SWITCH | WET LOCATION

ERT4L10CT5 — 15W, 1000 lm, 120V, 2700K - 5000K, Triac/ELV dimmable

Step 2: Choose a a Trim



4″ Round Reflector Trims
4 ½″ O.D. - 3″ I.D. - 1 ¼″ H

ERT415W — White
ERT415BB — Black



4″ Square Reflector Trims
4 ½″ Sq. - 2 ⅜″ Sq. - 1 ¼″ H

ERT445W — White
ERT445BB — Black

ELM™ System

2″-8″ Slim Panels

93+ CRI | IC RATED | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

Elm™ System LED Downlights & Slim Panels IC Rated

	Description	CAT. #	Specs
	New Construction Frame for Slim Panels — TRUE NAIL	E2LF1	2″ Frame. 2 5⁄8″ Opening
		E4LF1	4″ Frame. 4 1⁄4″ Opening
		E6LF1	6″ Frame. 6 1⁄4″ Opening
		E8LF1	8″ Frame. 8″ Cutout
	New Construction Round Mounting Plates	EMP4	4″ Plate. 13 1⁄4″ L - 6 1⁄2″ W - 4 1⁄4″ Opening
		EMP6	6″ Plate. 17 1⁄4″ L - 8 3⁄8″ W - 6 1⁄4″ Opening
		EMP8	8″ Plate. 18 1⁄4″ L - 10 3⁄8″ W - 7 3⁄4″ Opening
	New Construction Universal Frame for Elm™ System Downlights 12 1⁄8″ L - 7 5⁄8″ W	E246LF1	For use with 2″ (2 3⁄4″ O.D.), 4″ (4 3⁄8″ O.D.) or 6″ (6 1⁄4″ O.D.) Round Downlights
	2″ LED Round Downlights — CCT SWITCH — DAMP LOCATION 3 1⁄8″ O.D. - 2″ I.D. - 2 1⁄2″ H	ERT210CT5W	Reflector 8W, 550 lm, 2700K - 5000K
		ERT214CT5W	Baffle 8W, 550 lm, 2700K - 5000K
	2″ LED Square Downlights — CCT SWITCH — DAMP LOCATION 3 1⁄8″ Sq. - 2 1⁄4″ Sq. - 2 1⁄2″ H	ERT213CT5W	Reflector 8W, 600 lm, 2700K - 5000K
		ERT215CT5W	Baffle 8W, 600 lm, 2700K - 5000K
	2″ LED Gimbal Lights — CCT SWITCH — DAMP LOCATION 2 3⁄8″ O.D. - 1 1⁄3″ H	ERT218CT5W	5W, 350 lm, 2700K - 5000K
		ERT218CT5BZ	5W, 350 lm, 2700K - 5000K
	2″ LED Round Reflector — CCT SWITCH — DAMP LOCATION 3 1⁄8″ O.D. - 2 1⁄2″ H	ERT230CT5W	8.8W, 1000 lm, 2700K - 5000K
	3″ Adjustable Eyeball Downlight with 5-CCT Switch — CCT SWITCH — WET LOCATION 4 3⁄16″ O.D. - 2 15⁄16″ I.D. - 1 1⁄2″ H	ERT317CT5W	8W, 600 lm, 2700K - 5000K
	3″ Gimbal with 5-CCT Switch — CCT SWITCH — DAMP LOCATION 3 3⁄8″ O.D. - 1 3⁄4″ H	ERT318CT5W	8W, 600 lm, 2700K - 5000K
		ERT318CT5B	8W, 600 lm, 2700K - 5000K
		ERT318CT5BZ	8W, 600 lm, 2700K - 5000K
	3″ Ultra Slim LED Panel Light with 5-CCT Switch — CCT SWITCH — WET LOCATION 4″ O.D. - 2 1⁄2″ I.D. - 1″ H	ERT311CT5W	10W, 600 lm, 2700K - 5000K, 120V
	4″ Slim LED Panel Light with 5-CCT Switch — CCT SWITCH — WET LOCATION 4 3⁄8″ O.D. - 3″ I.D. - 1″ H	ERT411CT5W	9W, 500 lm, 2700K - 5000K
		ERT411CT5BZ	9W, 500 lm, 2700K - 5000K
	4″ HIGHLUMEN Slim LED Panel Light with 5-CCT Switch — CCT SWITCH — WET LOCATION 4 3⁄8″ O.D. - 3″ I.D. - 1″ H	ERT412CT5W	12W, 984 lm, 2700K - 5000K
		ERT412CT5BZ	12W, 984 lm, 2700K - 5000K
		ERT412CT5B	12W, 984 lm, 2700K - 5000K

ELM™ System

2"-8" Slim Panels

93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

Elm™ System LED Downlights & Slim Panels IC Rated

	Description	CAT. #	Specs
	**4" 120/277/347V, 0-10V** LED Slim Panel Light with 5-CCT Switch 4 ⅞" O.D. - 3 ⅛" I.D. - 1" H CCT SWITCH · WET LOCATION	ERT41DXCT5W	12W, 750 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
	4" Retrofit LED Recessed Downlight 5-CCT with Separate J-Box 5 ½" O.D. - 4" I.D. - 2 ½" H CCT SWITCH · WET LOCATION	ERT415CT5W	11W, 750 lm, 2700K - 5000K, 120V, White
		ERT415CT5BB	11W, 750 lm, 2700K - 5000K, 120V, Black
		ERT415CT5BZ	11W, 750 lm, 2700K - 5000K, 120V, Bronze
	4" 120/277/347V, 0-10V Recessed Downlight with 5-CCT Switch 5 ½" O.D. - 4" I.D. - 2 ½" H CCT SWITCH · WET LOCATION	ERT495CT5DXW	11W, 750 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
	4" LED Recessed Gimbal Downlight with 5-CCT Switch 5" O.D. - 3" I.D. - 1 ½" H CCT SWITCH · WET LOCATION	ERT413CT5W	10W, 650 lm, 2700K - 5000K, 120V
	4" 120/277/347V, 0-10V LED Recessed Gimbal with 5-CCT Switch 5" O.D. - 3" I.D. - 1 ½" H CCT SWITCH · DAMP LOCATION	ERT413CT5DXW	10W, 650 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
	4" LED Sloped Round Regressed Gimbal with 5-CCT Switch 5 ¾" O.D. - 3 ⅞" I.D. - 2 ½" H CCT SWITCH · WET LOCATION	ERT425CT5W	8W, 510 lm, 2700K - 5000K, 120V
	4" Round Adjustable Eyeball Downlight with 5-CCT Switch 5" O.D. - 3 ½" I.D. - 1 ½" H CCT SWITCH · DAMP LOCATION	ERT416CT5W	9W, 780 lm, 2700K - 5000K
		ERT416CT5BZ	9W, 780 lm, 2700K - 5000K
		ERT416CT5B	9W, 780 lm, 2700K - 5000K
	**4" Fire Rated** Round Reflector Recessed Downlight with 5-CCT Switch 5" O.D. - 3" I.D. - 2 ⅞" H CCT SWITCH · FIRE RATED · WET LOCATION	ERT417FCT5W	15W, 1000 lm, 2700K - 5000K, 120V, Triac/ELV **Fire Rated**
	**4" High Lumen** LED Reflector Recessed Downlight with 5-CCT & 5-Lumen Switch 5 ½" O.D. - 4" I.D. - 3 ½" H CCT SWITCH · LUMEN Switch	ERT475CT5DW	12W - 25W, 1000 lm - 2000 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All White
		ERT475CT5DH	12W - 25W, 1000 lm - 2000 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All Haze
		ERT475CT5DHW	12W - 25W, 1000 lm - 2000 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, Haze/White Ring
	4" LED Reflector Recessed Downlight with 5-CCT Switch 4 ⅞" Sq. - 2 ¾" Sq. - 2 ¾" H CCT SWITCH	ERT434CT5W	10W, 1000 lm, 2700K - 5000K
		ERT434CT5BB	10W, 1000 lm, 2700K - 5000K
	**4" High Lumen** LED Reflector Recessed Downlight with 5-CCT & 5-Lumen Switch 4 ⅞" Sq. - 2 ¾" Sq. - 2 ¾" H CCT SWITCH · LUMEN Switch	ERT487CT5W	10W - 18W, 1000 lm - 1800 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All White
		ERT487CT5BB	10W - 18W, 1000 lm - 1800 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All Black

ELM™ System
2″-8″ Slim Panels

93+ CRI | IC RATED | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

Elm™ System LED Downlights & Slim Panel IC Rated

	Description	CAT. #	Specs
	4″ LED Square Panel 5″ Sq. - 2 ¾″ Sq. - 1″ H	ERT44130BZ	9W, 550 lm, 3000K
		ERT44140BZ	9W, 600 lm, 4000K
		ERT441CT5W	12W, 700 lm, 2700K - 5000K
	6″ HIGHLUMEN Ultra Slim LED Round Panel Light with 5-CCT Switch 6 ½″ O.D. - 5″ I.D. - 1″ H	ERT612CT5W	15W, 950 lm, 2700K - 5000K, 120V
		ERT612CT5B	15W, 950 lm, 2700K - 5000K, 120V
		ERT612CT5BZ	15W, 950 lm, 2700K - 5000K, 120V
	6″ **120/277/347V** Ultra Slim LED Panel Light with 5-CCT Switch 6 ¾″ O.D. - 5″ I.D. - 1″ H	ERT61DXCT5W	15W, 950 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
	6″ LED Recessed Gimbal Downlight with 5-CCT Switch 7 ⅛″ O.D. - 4 ⅝″ I.D. - 2″ H	ERT613CT5W	15W, 900 lm, 2700K - 5000K, 120V
	6″ **120/277/347V, 0-10V** LED Recessed Gimbal with 5-CCT Switch 7 ⅛″ O.D. - 4 ⅝″ I.D. - 2″ H	ERT613CT5DXW	15W, 900 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
	6″ Shallow LED Recessed Downlight with 5-CCT Switch 7 ¼″ O.D. - 4 ⅞″ I.D. - 2 ¼″ H	ERT615CT5W	12W, 900 lm, 2700K - 5000K, 120V
	6″ Deep LED Recessed Downlight with 5-CCT Switch 7 ½″ O.D. - 4 ⅞″ I.D. - 3 ½″ H	ERT625CT5W	12W, 950 lm, 2700K - 5000K, 120V
	6″ **120/277/347V** Deep LED Recessed Downlight with 5-CCT Switch 7 ½″ O.D. - 4 ⅞″ I.D. - 3 ½″ H	ERT695CT5DXW	12W, 950 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
	6″ **Fire Rated** Round Reflector Recessed Downlight with 5-CCT Switch 6 ⅞″ O.D. -4 ½″ I.D. - 2 ⅞″ H	ERT627FCT5W	18W, 1500 lm, 2700K - 5000K, 120V, Triac/ELV **Fire Rated**
	6″ HIGHLUMEN LED Reflector Recessed Downlight with 5-CCT & 5-Lumen Switch 7 ½″ O.D. - 4 ⅞″ I.D. - 4 ½″ H	ERT685CT5DW	12W - 32W, 1000 lm - 2500 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All White
		ERT685CT5DH	12W - 32W, 1000 lm - 2500 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All Haze
		ERT685CT5DHW	12W - 32W, 1000 lm - 2500 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, Haze/White Ring

ELM™ System
2″-8″ Slim Panels

93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

Elm™ System Slim Panel IC Rated

Description	CAT. #	Specs
 6″ LED Square Panel 7 ¼″ Sq. - 4″ Sq. CCT SWITCH · WET LOCATION	ERT66130W	12W, 750 lm, 3000K
	ERT66130N	12W, 750 lm, 3000K
	ERT66130BZ	12W, 750 lm, 3000K
	ERT66140N	12W, 800 lm, 4000K
	ERT66140BZ	12W, 800 lm, 4000K
	ERT661CT5W	12W, 700 lm, 2700K - 5000K
 8″ HIGHLUMEN LED Panel 9″ O.D. - 6 ⅜″ I.D. - 1 ⅛″ H WET LOCATION	ERT812CT5W	26W, 2200 lm, 2700K - 5000K
 8″ 120/277/347V Ultra Slim LED Panel Light with 5-CCT Switch 8 ⅞″ O.D. - 6 ⅞″ I.D. - ⅞″ H CCT SWITCH · WET LOCATION	ERT81DXCT5W	20W, 1200 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V

Elm™ System Accessories

Description	CAT. #	Specs
 Extension Cord for ELM™ System Fixtures	ECNE10	10″ Extension Cord
	ECNE11	10 ft. Extension Cord
 Emergency Battery Backup for 3″ - 8″ ELM™ System Fixtures 15 ½″ L - 2 ⅛″ W - 1 ⅝″ H	KEM-ERT	90 min. of emergency light. Compatible with 3" - 8" Elm™ system fixtures (ERT3, ERT4, ERT6, & ERT8 Series)

Easy Pro™ Integral Junction Box LED Inserts


Description	CAT. #	Specs


Energy efficient LED Lighting fixtures designed to be easily install without the need of any recessed housing.
For direct contact with insulation. Title 24 Compliant. ENERGY STAR Compliant. ETL Listed.

 6″ Easy Pro™ Jbox LED Insert 7 ½″ O.D. - 2 13⁄16″ H WET LOCATION	ELR68530W	23W, 1400 lm, 3000K

The **Ply™ System**






0-10V Dimmable **LED** & **Housings**

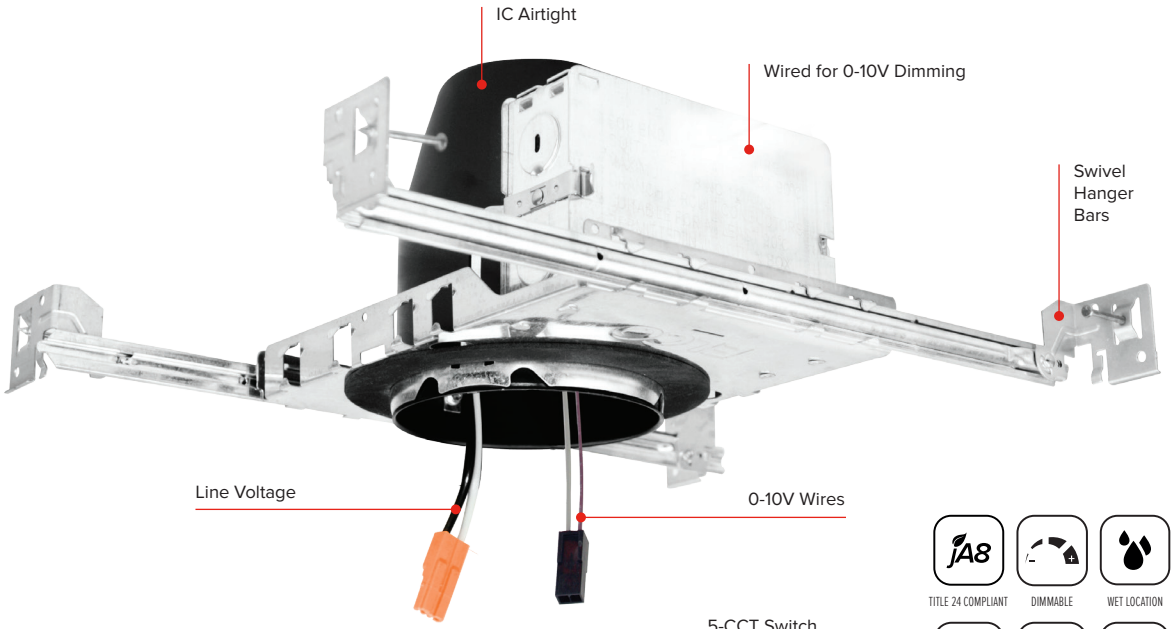

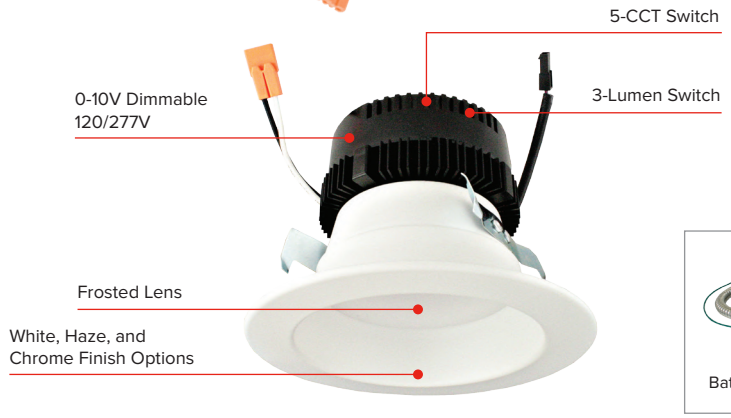



Battery Backup driver available upon request

SIZE	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
 4″	 Downlight	White, Black, Bronze, Chrome, Haze	 650 lm to 2000 lm	 2700K - 5000K
 6″	 Adjustable			



Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Ply™ **System**

0-10V Dimmable LED Recessed Fixtures

93+ CRI | IC RATED | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

4″ 0-10V Dedicated LED Housings

	Description	CAT. #	Specs
	4″ New Construction 2-Hour Fire Rated Housing (Sound Rated) FIRE RATED	EL48FICDXA	4″ Housing. 6 ¾″ Height
	4″ New Construction 2-Hour Fire Rated J-Box Housing FIRE RATED	EJB483ICDXA	4″ Housing. 4 ⅛″ Height
	4″ Standard IC Airtight New Construction Housing	EL490ICDXA	4″ Housing. 5 ½″ Height
		EL490ICDXA-EM5	Emergency Back-Up
	4″ Standard IC Airtight Remodel Housing	EL490RICDXA	4″ Housing. 5 ½″ Height

4″ 0-10V LED Inserts 120/277V

	Description	CAT. #	Specs
	4″ 0-10V LED Insert with 5-CCT & 3-Lumen Switch 5 ½″ O.D. - 4″ I.D. - 4 ⅛″ H LUMEN Switch CCT SWITCH WET LOCATION	EL475CT5DW	All White, 2700K - 5000K, 120/277V 850 lm (9.5W), 1000 lm (13.5W), 1500 lm (18W)
		EL475CT5DH	All Haze, 2700K - 5000K, 120/277V 850 lm (9.5W), 1000 lm (13.5W), 1500 lm (18W)
		EL475CT5DHW	Haze/White Ring, 2700K - 5000K, 120/277V 850 lm (9.5W), 1000 lm (13.5W), 1500 lm (18W)
		EL475CT5DBB	All Black, 2700K - 5000K, 120/277V 850 lm (9.5W), 1000 lm (13.5W), 1500 lm (18W)
	4″ 0-10V LED Insert with 5-CCT & 3-Lumen Switch 4 ⅞″ Sq. - 2 ¾″ Sq. - 4 ¼″ H LUMEN Switch CCT SWITCH WET LOCATION NEW!	EL487CT5W	All White, 2700K - 5000K, 120/277V 1000 lm (10W), 1400 lm (14W), 1800 lm (18W)
		EL487CT5BB	All Black, 2700K - 5000K, 120/277V 1000 lm (10W), 1400 lm (14W), 1800 lm (18W)
	4″ 0-10V LED Insert 5 ½″ O.D. - 4″ I.D. - 3″ H WET LOCATION	EL49530DW	All White, 12W, 800 lm, 3000K, 120/277V
		EL49530DCW	Chrome/White Ring, 12W, 800 lm, 3000K, 120/277V
		EL49540DCW	Chrome/White Ring, 12W, 900 lm, 4000K, 120/277V
	4″ 0-10V LED Round Adjustable Gimbal Insert 5″ O.D. - 4 ⅛″ H - 25° tilt DAMP LOCATION	EL41427DXW	All White, 10.5W, 650 lm, 2700K, 120/277V, 60°
		EL41430DXW	All White, 10.5W, 680 lm, 3000K, 120/277V, 60°
		EL41435DXW	All White, 10.5W, 710 lm, 3500K, 120/277V, 60°
	4″ Round Adjustable 0-10V LED Insert 5″ O.D. - 4 ⅛″ H - 65° tilt Optional Lens: EP710C (20º), EP712C (60º) DAMP LOCATION	EL49727DXW	All White, 12.6W, 850 lm, 2700K, 120/277V
		EL49727DXB	All Black, 12.6W, 850 lm, 2700K, 120/277V
		EL49730DXW	All White, 12.6W, 900 lm, 3000K, 120/277V
		EL49730DXB	All Black, 12.6W, 900 lm, 3000K, 120/277V
	4″ Square Adjustable 0-10V LED Insert 5″ Sq. - 4 ⅛″ H - 65° tilt Optional Lens: EP710C (20º), EP712C (60º) DAMP LOCATION	EL44727DXW	All White, 12.6W, 850 lm, 2700K, 120/277V
		EL44727DXB	All Black, 12.6W, 850 lm, 2700K, 120/277V
		EL44730DXW	All White, 12.6W, 900 lm, 3000K, 120/277V
		EL44730DXB	All Black, 12.6W, 900 lm, 3000K, 120/277V

The Ply™ **System**

0-10V Dimmable LED Recessed Fixtures



93+ CRI | IC RATED | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

6″ 0-10V Dedicated LED Housings

	Description	CAT. #	Specs
	6″ 0-10V New Construction 2-Hour Fire Rated Housing	EL75FICDXAS	6″ Shallow Housing. 6 3⁄16″ Height
		EL76FICDXA	6″ Housing. 7 ¾″ Height
	6″ 0-10V New Construction Housing	EL760ICDXA	6″ Shallow Housing. 5 ½″ Height
		EL760ICDXA-EM5	Emergency Back-Up
		EL770ICDXA	6″ Housing. 7 ½″ Height
		EL770ICDXA-EM5	Emergency Back-Up
	6″ 0-10V Remodel Housing	EL760RICDXA	6″ Shallow Housing. 5 ½″ Height
		EL770RICDXA	6″ Housing. 7 ½″ Height

6″ 0-10V LED Inserts 120/277V


	Description	CAT. #	Specs
	6″ 0-10V LED Insert with 5-CCT & 3-Lumen Switch 7 ½″ O.D. - 5″ I.D. - 5″ H WET LOCATION LUMEN Switch CCT SWITCH	EL685CT5DW	All White, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
		EL685CT5DH	All Haze, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
		EL685CT5DHW	Haze/White Ring, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
		EL685CT5DCW	Chrome/White Ring, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
		EL685CT5DBB	All Black, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
	6″ Round Adjustable LED Insert 7 ¼″ O.D. - 4 ⅛″ H - 65° tilt DAMP LOCATION	EL69727DXW	All White, 12.6W, 850 lm, 2700K, 120/277V
		EL69727DXB	All Black, 12.6W, 850 lm, 2700K, 120/277V
		EL69730DXW	All White, 12.6W, 900 lm, 3000K, 120/277V
		EL69730DXB	All Black, 12.6W, 900 lm, 3000K, 120/277V


0-10V Zinnia™ LED Undercabinet Bar

	Description	CAT. #	Specs
 Bronze available (BZ)	0-10V Zinnia™ LED Undercabinet Bar 3 ½″ W - 1″ H	EUM41DXW	12 ¼″, White, 5W, 450 lm, 3000K, 120V
		EUM42DXW	21″, White, 9W, 800 lm, 3000K, 120V
		EUM43DXW	24 ¼″, White, 10W, 900 lm, 3000K, 120V
		EUM44DXW	33 ¼″, White, 15W, 1350 lm, 3000K, 120V
		EUM45DXW	42 ¼″, White, 20W, 1800 lm, 3000K, 120V
		EUM41DXW-7	12 ¼″, White, 5W, 450 lm, 3000K, 277V
		EUM42DXW-7	21″, White, 9W, 800 lm, 3000K, 277V
		EUM43DXW-7	24 ¼″, White, 10W, 900 lm, 3000K, 277V
		EUM44DXW-7	33 ¼″, White, 15W, 1350 lm, 3000K, 277V
		EUM45DXW-7	42 ¼″, White, 20W, 1800 lm, 3000K, 277V

The **Birch™ System**

Commercial LED Downlights

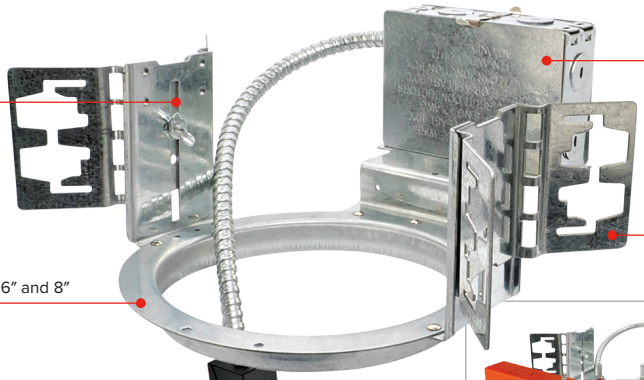



Frames available with Battery Backup

INTEGRATED LED

90+ CRI

DIMMABLE

DAMP LOCATION

5YR — 5 YEAR WARRANTY

50K HRS — 50,000 HOURS





Twist-On System for easy trim installation



Easy Installation Clips




SIZE & STYLE	BEAM ANGLES	FINISHES	LUMENS	COLOR TEMPERATURE
4″ Round & Square 6″ Round 8″ Round	Adjustable Focus Birch™ Pro: 25° - 45° Birch™ High Lumen: 22° - 50°	White Black Haze	750 lm to 5000 lm	2700K - 5000K


The Birch™ **System**

Architectural Commercial LED Lighting







4", 6", & 8" Round Commercial Frames

	Description	Cat. #	Specs
	New Construction Architectural Frames (hanger bars required)	ELB4EH	4" Architectural Frame. 4 ½" H - 4 ¾" O.D.
		ELB6EH	6" Architectural Frame. 5 ½" H - 6 ¼" O.D
	New Construction Architectural Frames with 90 min. Emergency Battery Backup (hanger bars required)	ELB4EH-EM5	4" Architectural Frame with Battery Backup.
		ELB6EH-EM5	6" Architectural Frame with Battery Backup
	27" Flat Hanger Bars	FB27	For wood construction (Set of 2)
	26" C-Channel Hanger Bars	CH26	For T-Bar ceilings (Set of 2)
	New Construction Plaster Frames with Hanger Bars	ELB4PF	4" Plaster Frame. 4 ¾" O.D
		ELB6PF	6" Plaster Frame. 6 ½" O.D
		ELB8PF	8" Plaster Frame. 7 ⅞" O.D
	New Construction Plaster Frames with Hanger Bars with 90 min. Emergency Battery Backup	ELB4PF-EM5	4" Plaster Frame with Battery Backup
		ELB6PF-EM5	6" Plaster Frame with Battery Backup
		ELB8PF-EM5	8" Plaster Frame with Battery Backup


4" Square Commercial Frames

	Description	Cat. #	Specs
	New Construction Architectural Frames (hanger bars required)	ELB44SQEH	4" Architectural Frame 5 ¼" O.D
	New Construction Architectural Frames with 90 min. Emergency Battery Backup (hanger bars required)	ELB44SQEH-EM5	4" Architectural Frame with Battery Backup
	27" Flat Hanger Bars	FB27	For wood construction (Set of 2)
	26" C-Channel Hanger Bars	CH26	For T-Bar ceilings (Set of 2)
	New Construction Plaster Frames with Hanger Bars	ELB44SQPF	4" Plaster Frame 5 ¼" O.D
	New Construction Plaster Frames with Hanger Bars with 90 min. Emergency Battery Backup	ELB44SQPF-EM5	4" Plaster Frame with Battery Backup

The Birch™ **System**

Architectural Commercial LED Lighting






Retrofits for Birch™ Fixtures

	Description		Cat. #	Specs
	Remodel/Retrofit		ELBRMD	Remodel/Retrofit (Add architectural downlighting to an existing ceiling) 4″ Square J-Box with 15″ Cable
	Remodel/Retrofit with 90 min. Emergency Battery Backup		ELBRMD-EM5	Remodel/Retrofit with Battery Backup
	Retrofit		ELBRT	Retrofit (To convert an existing fixture to a Birch™ fixture) 15″ Cable

The Birch™ **System**

Architectural Commercial LED Lighting







Birch™ LED Modules & Trims

	Description	CAT. #	Specs
	**Birch™ Pro** LED Module 750 lm - 1500 lm with 5-CCT Switch IC RATED **5-CCT Switch** 2700K - 5000K **Lumen Switch** 7L - 750 lm, 10W 10L - 1000 lm, 12W 15L - 1500 lm, 20W 	CCT SWITCH LUMEN Switch	• **IC Rated** for IC and Non-IC applications • Focus Beam Angle Adjustment (25˚ - 45˚) with the ease of a manual twist • Works with 4″, 6″, and 8″ commercial frames, remodel and retrofit applications • 4 ⅜″ O.D. - 2 ⅝″ I.D. - 3 ¼″ H
		ELB15RCT5ICA	2700K - 5000K, 120/277V, 0-10V/Triac/ELV dimming
	**Birch™ High Lumen** LED Module 2000 lm - 3000 lm with 5-CCT Switch HIGHLUMEN **5-CCT Switch** 2700K - 5000K **Lumen Switch** 20L - 2000 lm, 21W 25L - 2500 lm, 29W 30L - 3000 lm, 30W 	NEW! CCT SWITCH LUMEN Switch	• **Non-IC Rated** for Non-IC applications • Focus Beam Angle Adjustment (22˚ - 50˚) with the ease of a manual twist • Works with 4″, 6″, and 8″ commercial frames, remodel and retrofit applications • 4 ⅜″ O.D. - 2 ⅝″ I.D. - 3 ¼″ H
		ELB30RCT5	2700K - 5000K, 120/277V, 0-10V/Triac/ELV dimming
	**Birch™ High Lumen** LED Module 3500 lm - 5000 lm with 5-CCT Switch HIGHLUMEN **5-CCT Switch** 2700K - 5000K **Lumen Switch** 35L - 3500 lm, 35W 42L - 4200 lm, 45W 50L - 5000 lm, 56W 	NEW! CCT SWITCH LUMEN Switch	• **Non-IC Rated** for Non-IC applications • Focus Beam Angle Adjustment (22˚ - 50˚) with the ease of a manual twist • Works with 6″, and 8″ commercial frames, remodel and retrofit applications • 4 ⅜″ O.D. - 2 ⅝″ I.D. - 3 ¼″ H
		ELB50RCT5	2700K - 5000K, 120/277V, 0-10V dimming
	4″ Round Reflector Trim 6 ⅞″ O.D. - 4″ I.D. - 2 ⅝″ H	ELB410W	All White
		ELB410H	All Haze
		ELB410HW	Haze/White Ring
		ELB410BB	All Black
	4″ Square Reflector Trim 5 ⅞″ Sq. - 4 7⁄16″ Sq. - 3 ¾″ H	ELB440W	All White
		ELB440H	All Haze
		ELB440HW	Haze/White Ring
		ELB440BB	All Black
	6″ Round Reflector Trim 8 ½″ O.D. - 5 ½″ I.D. - 3 ⅛″ H	ELB610W	All White
		ELB610H	All Haze
		ELB610HW	Haze/White Ring
		ELB610BB	All Black
	6″ Round Adjustable Reflector Trim 7 ⅜″ O.D. - 5″ I.D. - 2 ¼″ H	ELB629W	All White
		ELB629B	All Black
		ELB629H	All Haze
	8″ Round Reflector Trim 10 ⅜″ O.D. - 7 ⅛″ I.D. - 3 ⅞″ H	ELB810W	All White
		ELB810H	All Haze


The **Cedar™ System**

High-End **Residential** & Light **Commercial** LED Lighting

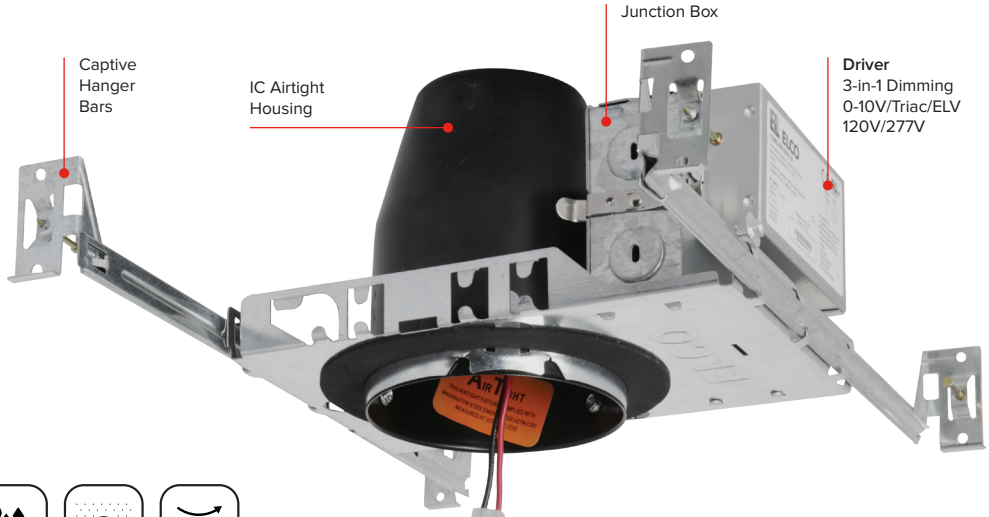

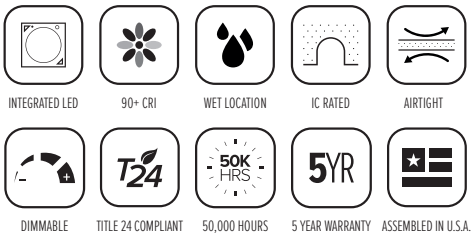


Battery Backup driver available upon request

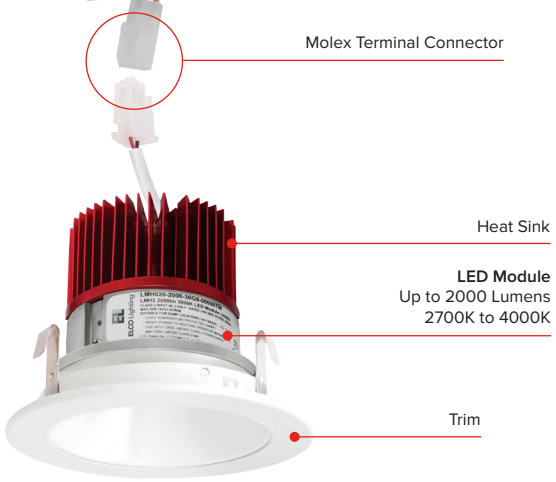

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
4″ 6″	Round Square Adjustable Trimless	White, Black Bronze, Nickel Haze, Copper	850 lm to 2000 lm	2700K - 4000K & Sunset Dimming

The Cedar™ **System**


High-End Residential & Light Commercial LED Lighting

TITLE 24 COMPLIANT · DIMMABLE · 50,000 HOURS · ASSEMBLED IN U.S.A.

3″ LED IC Airtight Housings with Driver

	Description		Cat. #	Specs
	3″ New Construction LED ICA Housing with Driver Opening: 3 ¼″ x 5 ½″ H	IC RATED	E3LC08ICA2	850 lm, 120V, Triac/ELV
			E3LC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
			E3LC08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	3″ New Construction LED ICA Double Wall Housing with Driver Opening: 3 ¼″ x 5 ½″ H	IC RATED	E3LC10ICA2	1000 lm, 120V, Triac/ELV
			E3LC10ICAD2	1000 lm, 120/277V, 0-10V/Triac/ELV
			E3LC10ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	3″ Remodel LED ICA Housing with Driver Opening: 3 ¼″ x 5 ½″ H	IC RATED	E3LRC08ICA2	850 lm, 120V, Triac/ELV
			E3LRC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
			E3LRC08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	3″ New Construction LED Housing with Driver 2-Hour Fire Rated Opening: 3 ¼″ x 7 ¾″ H	FIRE RATED	E3FH08ICA2	850 lm, 120V, Triac/ELV
			E3FH08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
			E3FH08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV

3″ LED Housings with Driver (Non-IC Airtight)

	Description	Cat. #	Specs
	3″ New Construction LED Housing with Driver Opening: 3 ¼″ x 5 ½″ H	E3LC10-2	1000 lm, 120V, Triac/ELV
		E3LC10D2	1000 lm, 120/277V, 0-10V/Triac/ELV
		E3LC10SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	3″ Remodel LED Housing with Driver Opening: 3 ¼″ x 5 ½″ H	E3LRC10-2	1000 lm, 120V, Triac/ELV
		E3LRC10D2	1000 lm, 120/277V, 0-10V/Triac/ELV
		E3LRC10SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV

The Cedar™ **System**

High-End Residential & Light Commercial LED Lighting

TITLE 24 COMPLIANT · DIMMABLE · WET LOCATION · 5 YEAR WARRANTY · 50,000 HOURS

3″ LED Light Engines

Round Reflector	Round Baffle	Square Pinhole	Square Reflector	Round Pinhole
				
E310C Series	E314C Series	E315C Series	E320C Series	E329C Series
Finishes: W2, B2, BZ2, BB2, C2, H2	Finishes: W2, B2, BZ2, BB2	Finishes: W2, B2, C2, BZ2, BB2	Finishes: W2, BZ2, BB2, C2, B2, H2	Finishes: W2, B2, C2, BB2
4 ⅜″ O.D. - 2 ⅞″ I.D. - 4 11⁄16″ H	4 ⅜″ O.D. - 2 ⅞″ I.D. - 4 11⁄16″ H	4 ⅜″ Sq. - 2″ Sq. - 4 11⁄16″ H	4 ⅜″ Sq. - 2 ⅞″ I.D. - 4 11⁄16″ H	4 ⅜″ O.D. - 1 ½″ I.D. - 4 11⁄16″ H

DIMS TO WARM SUNSET DIMMING TECHNOLOGY *All Sunset LED Light Engines must be used with "SD" Housings

Product Number Builder

Cedar™ 3″ Light Engine	Lumen	Color Temp	Finish	Generation	Beam Angle
E310C Round Reflector	**08** 850 lm	**27** 2700K	**W** All White	**2** Gen 2	60°
E314C Round Baffle	**10** 1000 lm	**30** 3000K	**B** Black/Wht Trim		**-F** 38°
E315C Square Pinhole		**35** 3500K	**C** Chrome/Wht Trim		**-N** 24°
E320C Square Reflector		**40** 4000K	**H** Haze/Wht Trim		**-S** 15°
E329C Round Pinhole		**50** 5000K	**BZ** All Bronze		
		SD Sunset	**BB** All Black		

Example: **E310C0827W2** [ELCO Cedar™ 3″ Light Engine, 850 lm, 2700K, All White, Gen 2, 60° lens]

The Cedar™ **System**


High-End Residential & Light Commercial LED Lighting

TITLE 24 COMPLIANT | DIMMABLE | 50,000 HOURS | ASSEMBLED IN U.S.A.

4″ LED IC Airtight Housings with Driver

	Description		Cat. #	Specs
	4″ New Construction LED ICA Housing with Driver Opening: 4 ¼″ x 5 ½″ H	IC RATED	E4LC08ICA2	850 lm, 120V, Triac/ELV
			E4LC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
			E4LC08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	4″ New Construction LED ICA Double Wall Housing with Driver Opening: 4 ¼″ x 5 ½″ H	IC RATED	E4LC12ICA2	1250 lm, 120V, Triac/ELV
			E4LC12ICAD2	1250 lm, 120/277V, 0-10V/Triac/ELV
			E4LC12ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1250 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
			E4LC16ICA2	1600 lm, 120V, Triac/ELV
			E4LC16ICAD2	1600 lm, 120/277V, 0-10V/Triac/ELV
			E4LC16ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	4″ Remodel LED ICA Housing with Driver Opening: 4 ¼″ x 5 ½″ H	IC RATED	E4LRC08ICA2	850 lm, 120V, Triac/ELV
			E4LRC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
			E4LRC08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	4″ New Construction LED Housing with Driver 2-Hour Fire Rated Opening: 4 ¼″ x 7 ¾″ H	FIRE RATED	E4FH08ICA2	850 lm, 120V, Triac/ELV
			E4FH08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
			E4FH08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	4″ New Construction Foam Insulated R60 LED Housing Opening: 4 ¼″ x 5 ½″ H	IC RATED	E4AJ08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
			E4AJ12ICAD2	1250 lm, 120/277V, 0-10V/Triac/ELV

4″ LED Housings with Driver (Non-IC Airtight)

	Description	Cat. #	Specs
	4″ New Construction LED Housing with Driver Opening: 4 ¼″ x 5 ½″ H	E4LC12-2	1250 lm, 120V, Triac/ELV
		E4LC12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LC12SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1250 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	4″ New Construction LED Double Wall Housing with Driver Opening: 4 ¼″ x 7 ¼″ H	E4LC16-2	1600 lm, 120V, Triac/ELV
		E4LC16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LC16SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	4″ Remodel LED Housing with Driver Opening: 4 ¼″ x 5 ½″ H	E4LRC12-2	1250 lm, 120V, Triac/ELV
		E4LRC12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LRC12SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1250 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV

The Cedar™ **System**

High-End Residential & Light Commercial LED Lighting

TITLE 24 COMPLIANT | DIMMABLE | WET LOCATION | 5 YEAR WARRANTY | 50,000 HOURS

4″ LED Light Engines

Round Reflector	Round Wall Wash	Round Baffle	Round Adjustable	Round Pinhole
				
E410C Series	E411C Series	E414C Series	E418C Series	E429C Series
Finishes: W2, B2, BZ2, BB2, C2, H2	Finishes: W2, B2, BZ2, BB2, C2, H2	Finishes: W2, B2, BZ2, BB2	Finishes: W2, BZ2, BB2	Finishes: W2, B2, C2
5″ O.D. - 3 ¼″ I.D. - 4 9⁄16″ H	5″ O.D. - 3 ¼″ I.D. - 4 9⁄16″ H	5″ O.D. - 3 ¼″ I.D. - 4 9⁄16″ H	5″ O.D. - 3 ¾″ I.D. - 4 9⁄16″ H	5″ O.D. - 1 ¾″ I.D. - 4 9⁄16″ H

Square on Square Baffle	Square on Square Reflector	Square on Round Reflector	Square on Round Baffle	Square Adjustable
				
E415C Series	E417C Series	E420C Series	E424C Series	E428C Series
Finishes: W2, BZ2, B2	Finishes: W2	Finishes: W2, B2, BZ2, BB2, C2, H2, MW2, MB2	Finishes: W2, B2, BZ2, BB2	Finishes: W2, BZ2, BB2, C2
5″ Sq. - 2 3⁄8″ Sq. - 4 9⁄16″ H	5″ Sq. - 2 3⁄8″ Sq. - 4 9⁄16″ H	5″ Sq. - 3 5⁄8″ I.D. - 4 9⁄16″ H	5″ Sq. - 3 5⁄8″ I.D. - 4 9⁄16″ H	4 7⁄8″ Sq. - 3 9⁄16″ I.D. - 4 9⁄16″ H

DIMS TO WARM SUNSET DIMMING TECHNOLOGY *All Sunset LED Light Engines must be used with "SD" Housings

Product Number Builder

Cedar™ 4″ Light Engine	Lumen	Color Temp	Finish	Generation	Beam Angle
E410C Round Reflector	**08** 850 lm	**27** 2700K	**W** All White	**2** Gen 2	60°
E411C Round Wall Wash	**12** 1250 lm	**30** 3000K	**B** Black/Wht Trim		**-F** 38°
E414C Round Baffle	**16** 1600 lm	**35** 3500K	**C** Chrome/Wht Trim		**-N** 24°
E418C Round Adjustable		**40** 4000K	**H** Haze/Wht Trim		**-S** 15°
E429C Round Pinhole		**50** 5000K	**BZ** All Bronze		
E415C Square Baffle		**SD** Sunset	**BB** All Black		
E417C Sq/Sq Reflector			**MW** Matte White		
E420C Sq/Round Reflector			**MB** Matte Black		
E424C Sq/Round Baffle					
E428C Square Adjustable					

Example: **E429C16SDW2** [ELCO Cedar™ 4″ Round Pinhole Light Engine, 1600 lm, Sunset Dimming, All White, Gen 2, 60° lens]

The Cedar™ **System**

High-End Residential & Light Commercial LED Lighting

TITLE 24 COMPLIANT · DIMMABLE · 50,000 HOURS · ASSEMBLED IN U.S.A.

4" Trimless LED IC Airtight Housings with Driver



4" New Construction
LED ICA Trimless
Housing with Driver
Opening: 4 ¼" x 5 ½" H

IC RATED

Description	Cat. #	Specs
	E4TL08ICA2	850 lm, 120V, Triac/ELV
	E4TL08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
	E4TL08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E4TL12ICA2	1250 lm, 120V, Triac/ELV
	E4TL12ICAD2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E4TL12ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1250 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E4TL16ICA2	1600 lm, 120V, Triac/ELV, 7 ¼" Height
	E4TL16ICAD2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E4TL16ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV

4" Trimless LED Light Engines

Round Trimless Reflector	Round Trimless Baffle	Square Trimless Reflector
		
E430C Series	E434C Series	E444C Series
Finishes: W2, B2, BZ2 Spackle Frame Included	Finishes: W2, B2, BZ2 Spackle Frame Included	Finishes: W2, B2, BZ2 Spackle Frame Included
3 ⅞" O.D. - 3 ¾" I.D. - 4 ⅝" H	3 ⅞" O.D. - 3 ¾" I.D. - 4 ⅝" H	3 ¼" Sq. - 2 ⅜" H

DIMS TO WARM SUNSET DIMMING TECHNOLOGY *All Sunset LED Light Engines must be used with "SD" Housings

Product Number Builder	Cedar™ 4" Trimless	Lumen	Color Temp	Finish	Generation	Beam Angle
	E430C Round Reflector **E434C** Round Baffle **E444C** Square Reflector	**08** 850 lm **12** 1250 lm* **16** 1600 lm*	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **50** 5000K **SD** Sunset	**W** All White **B** All Black **BZ** All Bronze	**2** Gen 2	60° **-F** 38° **-N** 24° **-S** 15°

Example: **E430C0830W2** [ELCO Cedar™ 4" Round Reflector, 850 lm, 3000K, All White, Gen 2, 60° lens]

* Round Light Engines only

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Cedar™ **System**

High-End Residential & Light Commercial LED Lighting

TITLE 24 COMPLIANT · DIMMABLE · 50,000 HOURS · ASSEMBLED IN U.S.A.

6″ LED IC Airtight Housings with Driver

Description		Cat. #	Specs
	6″ New Construction LED ICA Housing with Driver Opening: 6 ¼″ x 7 ¼″ H IC RATED	E6LC08ICA2	850 lm, 120V, Triac/ELV
		E6LC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
		E6LC08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
		E6LC12ICA2	1200 lm, 120V, Triac/ELV
		E6LC12ICAD2	1200 lm, 120/277V, 0-10V/Triac/ELV
		E6LC12ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1200 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	6″ New Construction LED ICA Double Wall Housing with Driver Opening: 6 ¼″ x 7 ½″ H IC RATED	E6LC16ICA2	1600 lm, 120V, Triac/ELV
		E6LC16ICAD2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E6LC16ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
		E6LC20ICA2	2000 lm, 120V, Triac/ELV
		E6LC20ICAD2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E6LC20ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	2000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	6″ Remodel LED ICA Housing with Driver Opening: 6 ¼″ x 7 ¼″ H IC RATED	E6LRC08ICA2	850 lm, 120V, Triac/ELV
		E6LRC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
		E6LRC08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
		E6LRC12ICA2	1200 lm, 120V, Triac/ELV
		E6LRC12ICAD2	1200 lm, 120/277V, 0-10V/Triac/ELV
		E6LRC12ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1200 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	6″ New Construction LED Housing with Driver 2-Hour Fire Rated Opening: 6 ¼″ x 7 ¾″ H FIRE RATED	E6FH08ICA2	850 lm, 120V, Triac/ELV
		E6FH08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
		E6FH08ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
		E6FH12ICA2	1200 lm, 120V, Triac/ELV
		E6FH12ICAD2	1200 lm, 120/277V, 0-10V/Triac/ELV
		E6FH12ICASD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1200 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV

The Cedar™ **System**

High-End Residential & Light Commercial LED Lighting

TITLE 24 COMPLIANT | DIMMABLE | WET LOCATION | 5 YEAR WARRANTY | 50,000 HOURS

6″ LED Housings with Driver (Non-IC Airtight)

Description	Cat. #	Specs
 6″ New Construction LED Housing with Driver Opening: 6 ¼″ x 7 ¼″ H	E6LC16-2	1600 lm, 120V, Triac/ELV
	E6LC16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E6LC16SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E6LC20-2	2000 lm, 120V, Triac/ELV
	E6LC20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E6LC20SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	2000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 6″ Remodel LED Housing with Driver Opening: 6 ¼″ x 7 ¼″ H	E6LRC16-2	1600 lm, 120V, Triac/ELV
	E6LRC16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E6LRC16SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E6LRC20-2	2000 lm, 120V, Triac/ELV
	E6LRC20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E6LRC20SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	2000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV

The Cedar™ **System**

High-End Residential & Light Commercial LED Lighting

TITLE 24 COMPLIANT · DIMMABLE · WET LOCATION · 5 YEAR WARRANTY · 50,000 HOURS

6″ LED Light Engines

Round Reflector	Round Baffle	Round Adjustable Baffle	Round Adjustable Reflector
			
E610C Series	E614C Series	E616C Series	E617C Series
Finishes: W2, B2, BZ2, C2, G2, H2	Finishes: W2, B2, BZ2, BB2	Finishes: W2, B2, BZ2	Finishes: W2, B2, BZ2
7 ¼″ O.D. - 5 ¾″ I.D. - 4 ⅝″ H	7 ¼″ O.D. - 5 ¾″ I.D. - 4 ⅝″ H	7″ O.D. - 6″ I.D. - 4 ⅜″ H	7″ O.D. - 6″ I.D. - 4 ⅜″ H

DIMS TO WARM SUNSET DIMMING TECHNOLOGY

*All Sunset LED Light Engines must be used with "SD" Housings

Product Number Builder	Cedar™ 6″ Light Engine	Lumen	Color Temp	Finish	Generation	Beam Angle
	E610C Round Reflector	**08** 850 lm	**27** 2700K	**W** All White	**2** Gen 2	60°
	E614C Round Baffle	**12** 1250 lm	**30** 3000K	**B** Black/Wht Trim		**-F** 38°
	E616C Round Adj. Baffle	**16** 1600 lm	**35** 3500K	**BZ** All Bronze		**-N** 24°
	E617C Round Adj. Ref.	**20** 2000 lm	**40** 4000K			**-S** 15°
			50 5000K			
			SD Sunset			

Example: **E614C2040BZ2** [ELCO Cedar™ 6″ Round Baffle Light Engine, 2000 lm, 4000K, All Bronze, Gen 2, 60° lens]

The Cedar™ **System**

High-End Residential & Light Commercial LED Lighting

TITLE 24 COMPLIANT · DIMMABLE · 50,000 HOURS · ASSEMBLED IN U.S.A.

4" Dedicated LED IC Airtight Housings

	Description		Cat. #	Specs
	4" New Construction LED ICA Housing Opening: 4" x 5 ½" H	IC RATED	EL490ICA	14W MAX., 120/277V
			EL490ICA-7	Includes step-down transformer 277V to 12V
	4" Remodel LED ICA Housing Opening: 4" x 5 ½" H	IC RATED	EL490RICA	14W MAX., 120/277V

4" LED Retrofit Module & Driver

Round Reflector	Round Wall Wash	Round Baffle	Round Adjustable	Square on Square Baffle
				
E410R Series Finishes: W, B, BZ, BB, C, H, MW, MB 5" O.D. - 3 ¼" I.D. - 4 ⅛" H	E411R Series Finishes: W, B, BZ, BB, C, H, MW, MB 5" O.D. - 3 ¼" I.D. - 4 ⅛" H	E414R Series Finishes: W, B, BZ, BB 5" O.D. - 3 ¼" I.D. - 4 ⅛" H	E418R Series Finishes: W, BZ, BB, C 5" O.D. - 3 ¾" I.D.	E415R Series Finishes: W, BZ 5" Sq. - 2 ⅜" Sq. - 4 ⅛" H

Square on Square Reflector	Square on Round Reflector	Square on Round Baffle	Square Adjustable
			
E417R Series Finishes: W, BZ 5" Sq. - 2 ⅜" Sq. - 4 ⅛" H	E420R Series Finishes: W, BZ, BB, C, H, MW, MB 5" Sq. - 3 ⅝" I.D. - 4 ⅛" H	E424R Series Finishes: W, BZ, BB, C, H, MW, MB 5" Sq. - 3 ⅝" I.D. - 4 ⅛" H	E428R Series Finishes: W, BZ, BB, C 4 ⅞" Sq. - 3 ⅝" I.D.

DIMS TO WARM SUNSET DIMMING TECHNOLOGY *All Sunset LED Light Engines must be used with "SD" Housings

Product Number Builder

4" LED Module & Driver		Lumen	Color Temp		Finish		Beam Angle	
E410R	Round Reflector	**08** 850 lm	**27**	2700K	**W**	All White		60°
E411R	Round Wall Wash		**30**	3000K	**B**	Black/Wht Trim	**-F**	38°
E414R	Round Baffle		**35**	3500K	**C**	Chrome/Wht Trim	**-N**	24°
E418R	Round Adjustable		**40**	4000K	**H**	Haze/Wht Trim	**-S**	15°
E415R	Sq/Sq Baffle		**50**	5000K	**BZ**	All Bronze		
E417R	Sq/Sq Reflector		**SD**	Sunset	**BB**	All Black		
E420R	Sq/Round Reflector				**MW**	Matte White		
E424R	Sq/Round Baffle				**MB**	Matte Black		
E428R	Square Adjustable							

Example: **E411R0827W-F** [ELCO 4" Round Wall Wash LED Module with Driver, 850 lm, 2700K, All White, 38° lens]

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Cedar™ **System**

High-End Residential & Light Commercial LED Lighting

TITLE 24 COMPLIANT · DIMMABLE · 50,000 HOURS · ASSEMBLED IN U.S.A.

6″ Dedicated LED IC Airtight Housings

	Description		Cat. #	Specs
	6 New Construction LED ICA Housing 2-Hour Fire Rated Opening: 6 ⅜″ x 7 ¾″ H	FIRE RATED	EL76FICA	22W MAX., 120/277V
			EL76FICA-7	Includes step-down transformer 277V to 120V
	6″ New Construction LED ICA Housing Opening: 6 ¼″ x 7″ H	IC RATED	EL770ICA	24W MAX., 120/277V
			EL770ICA-7	Includes step-down transformer 277V to 120V
	6″ Remodel LED ICA Housing Opening: 6 ½″ x 7″ H	IC RATED	EL770RICA	24W MAX., 120/277V
			EL770RICA-7	Includes step-down transformer 277V to 120V

6″ LED Retrofit Module & Driver

Round Reflector	Round Baffle	Round Adjustable Baffle	Round Adjustable Reflector
			
E610R Series Finishes: W, B, C, G, H, BZ 7 ⅛″ O.D. - 5 ¾″ I.D. - 6 ¼″ H	E614R Series Finishes: W, B, BZ 7 ⅛″ O.D. - 5 ¾″ I.D. - 4 ⅝″ H	E616R Series Finishes: W, B, BZ 7″ O.D. - 6″ I.D.	E617R Series Finishes: W, B, C, H, BZ 7″ O.D. - 6″ I.D.

DIMS TO WARM SUNSET DIMMING TECHNOLOGY

*All Sunset LED Light Engines must be used with "SD" Housings


Product Number Builder	6″ LED Module & Driver	Lumen	Color Temp	Finish	Beam Angle
	E610R Round Reflector **E614R** Round Baffle **E616R** Round Adj. Baffle **E617R** Round Adj. Reflector	**08** 850 lm **12** 1250 lm	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **50** 5000K **SD** Sunset	**W** All White **B** Black/Wht Trim **BZ** All Bronze	60° **-F** 38° **-N** 24° **-S** 15°

Example: **E610R1250H** [ELCO 6″ Round Reflector LED Module with Driver, 1250 lm, 5000K, Haze/White Trim, 60° lens]

The **Laurel™ System**

Commercial LED Lighting

THE PERFECT LIGHTING SOLUTION FOR HOSPITALITY, RETAIL & COMMERCIAL PROJECTS

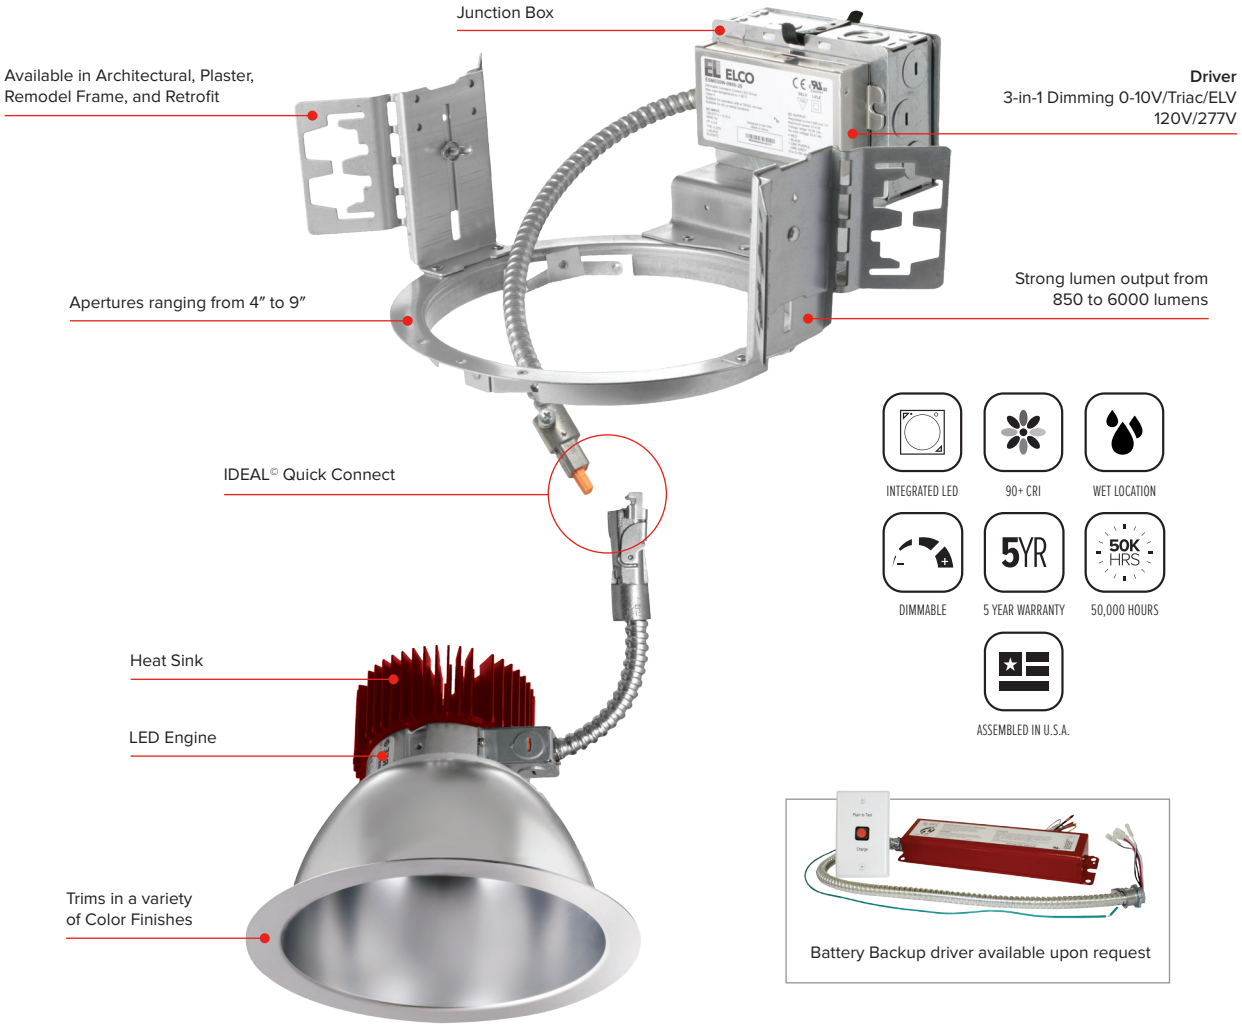

Battery Backup driver available upon request

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
4″	Reflector	White	850 lm to 6000 lm	2700K - 5000K & Sunset Dimming
6″	Wall Wash	Black		
8″	Drop Glass	Chrome		
9″	Adjustable	Haze		

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Laurel™ **System**

Architectural Commercial LED Lighting

DIMMABLE · WET LOCATION · 5 YEAR WARRANTY · ASSEMBLED IN U.S.A.

4″ Round LED Architectural Frames with Driver

	Description	Cat. #	Specs
	4″ New Construction Architectural Frame with Driver Opening: 4 ¾″ x 4 ¼″ H *Requires Hanger Bars	E4LHU08D2*	850 lm, 120/277V, 0-10V/Triac/ELV
		E4LHU12D2*	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LHU16D2*	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LHU20D2*	2000 lm, 120/277V, 0-10V/Triac/ELV
		E4LHU30D2*	3000 lm, 120/277V, 0-10V/Triac/ELV
	4″ New Construction Plaster Frame with Driver Opening: 4 ⅞″ x 3 ½″ H	E4LFU08D2	850 lm, 120/277V, 0-10V/Triac/ELV
		E4LFU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LFU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LFU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E4LFU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	4″ Remodel Frame with Driver Opening: 4 ⅞″ x 6 ½″ H	E4LRU08D2	850 lm, 120/277V, 0-10V/Triac/ELV
		E4LRU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LRU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LRU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E4LRU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	4″ Retrofit Kit with Driver Height: 3 ½″ Width: 4 ⅞″ Depth: 3″	E4LTU08D2	850 lm, 120/277V, 0-10V/Triac/ELV
		E4LTU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LTU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LTU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E4LTU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV

Product Number Builder	ELCO 4″ Round Frame	Voltage	Lumen	Dimming	Optional
	E4LH Architectural **E4LF** Plaster **E4LR** Remodel **E4LT** Retrofit Kit	**U** 120/277V	**08*** 850 lm **12*** 1250 lm **16*** 1600 lm **20** 2000 lm **30** 3000 lm	**D2** Triac/ELV/0-10V **S** Sunset **L2** Lutron	**EM1** Emergency Backup up to 700 lm output **EM2** Emergency Backup up to 1100 lm output

Example: **E4LHU20D2** [ELCO 4″ Architectural Frame, 120/277V, 2000 lm, Triac/ELV/0-10V Dimming]
*IC Rated, up to 1600 lm

4″ Round LED Light Engines

Round Reflector	Round Wall Wash



E410 Series
Finishes:
W2, B2, C2, H2, HW2
5 ½″ O.D. - 4 ¼″ I.D. - 5 ¾″ H



E411 Series
Finishes:
W2, B2, C2, H2, HW2
5 ½″ O.D. - 4 ¼″ I.D. - 5 ⅛″ H

DIMS TO WARM SUNSET DIMMING TECHNOLOGY

*All Sunset LED Light Engines must be used with "SD" Housings

Product Number Builder	ELCO 4″ Engines	Lume	Lumen	Color Temp	Finish	Beam Angle
	E410* Reflector **E411*** Wall Wash	**L**	**08** 850 lm **12** 1250 lm **16** 1600 lm **20** 2000 lm **30** 3000 lm	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **50** 5000K **SD** Sunset	**H2** All Haze **W2** All White **B2** All Black **C2** All Chrome **HW2** Haze/White Ring	60° (Standard) **-F** 36° **-N** 25° **-S** 10°


Example: **E410L2030W2** [ELCO 4″ Reflector, 2000 lm, 3000K, White Finish Trim]
*E410 &E411 Airtight

The Laurel™ **System**

Architectural Commercial LED Lighting

DIMMABLE | WET LOCATION | 5YR | 5 YEAR WARRANTY | ASSEMBLED IN U.S.A.


4″ Square LED Architectural Frames with Driver

Description	Cat. #	Specs
 4″ New Construction Architectural Frame with Driver Opening: 5 ¼″ x 3 ½″ H *Requires Hanger Bars	E4SQLHU08D2*	850 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLHU12D2*	1250 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLHU16D2*	1600 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLHU20D2*	2000 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLHU30D2*	3000 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLHU40D2*	4000 lm, 120/277V, 0-10V/Triac/ELV
 4″ New Construction Plaster Frame with Driver Opening: 5 ¼″ x 3 ½″ H	E4SQLFU08D2	850 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLFU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLFU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLFU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLFU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLFU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV

	ELCO 4″ Square Frame	Voltage	Lumen	Dimming	Optional
Product Number Builder	**E4SQLH** Architectural **E4SQLF** Plaster	**U** 120/277V	**08*** 850 lm **12*** 1250 lm **16*** 1600 lm **20** 2000 lm **30** 3000 lm **40** 4000 lm	**D2** Triac/ELV/0-10V **S** Sunset **L2** Lutron	**EM1** Emergency Backup up to 700 lm output **EM2** Emergency Backup up to 1100 lm output

Example: **E4SQLHU08S** [ELCO 4″ Square Architectural Frame, 120/277V, 850 lm, Sunset Dimming]
*IC Rated, up to 1600 lm

4″ Square LED Light Engines

Square Reflector	Square Wall Wash
 E440 Series Finishes: W2, H2 6″ Sq. - 4 ½″ Sq. - 6 ⅝″ H	 E442 Series Finishes: W2, H2 6″ Sq. - 4 ½″ Sq. - 7″ H

DIMS TO WARM SUNSET DIMMING TECHNOLOGY

*All Sunset LED Light Engines must be used with "SD" Housings

	ELCO 4″ Engines	Lume	Lumen	Color Temp	Finish	Beam Angle
Product Number Builder	**E440*** Reflector **E442*** Wall Wash	**L**	**08** 850 lm **12** 1250 lm **16** 1600 lm **20** 2000 lm **30** 3000 lm **40** 4000 lm	**27** 2700K (Up to 3000 lm) **30** 3000K **35** 3500K **40** 4000K **50** 5000K **SD** Sunset	**W2** All White **H2** Haze/White Ring	60° (Standard) **-F** 36° **-N** 25° **-S** 10°

Example: **E440L2030W2** [ELCO 4″ Reflector, 2000 lm, 3000K, White Finish Trim]
*E440 & E442 Airtight

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Laurel™ **System**

Architectural Commercial LED Lighting

DIMMABLE · WET LOCATION · 5 YEAR WARRANTY · ASSEMBLED IN U.S.A.

6″ Round LED Architectural Frames with Driver

	Description	Cat. #	Specs
	6″ New Construction Architectural Frame with Driver Opening: 6 ¼″ x 4 ½″ H *Requires Hanger Bars	E6LHU08D2*	850 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU12D2*	1250 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU16D2*	1600 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU20D2*	2000 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU30D2*	3000 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU40D2*	4000 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU60D2*	6000 lm, 120/277V, 0-10V/Triac/ELV
	6″ New Construction Plaster Frame with Driver Opening: 6 ¼″ x 3 ½″ H	E6LFU08D2	850 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
	6″ Remodel Frame with Driver Opening: 6 ¼″ x 7″ H	E6LRU08D2	850 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
	6″ Retrofit Kit with Driver Height: 3 ½″ Width: 5″ Depth: 3″	E6LTU08D2	850 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV

	ELCO 6″ Round Frame	Voltage	Lumen	Dimming	Optional
Product Number Builder	**E6LH** Architectural **E6LF** Plaster **E6LR** Remodel **E6LT** Retrofit Kit	**U** 120/277V	**08*** 850 lm **12*** 1250 lm **16*** 1600 lm **20*** 2000 lm **30** 3000 lm **40** 4000 lm **60** 6000 lm	**D2** Triac/ELV/0-10V **S** Sunset **L2** Lutron	**EM1** Emergency Backup up to 700 lm output **EM2** Emergency Backup up to 1100 lm output

Example: **E6LHU20S** [ELCO 6″ Architectural Frame, 120/277V, 2000 lm, Sunset Dimming]
*IC Rated, up to 2000 lm

The Laurel™ **System**

Architectural Commercial LED Lighting

TITLE 24 COMPLIANT | DIMMABLE | WET LOCATION | 5 YEAR WARRANTY | 50,000 HOURS

6″ Round LED Light Engines

Round Reflector	Round Wall Wash	Round Adjustable
		
E610 Series	E611 Series	E618 Series
Finishes: W2, B2, C2, H2, HW2	Finishes: W2, B2, C2, H2, HW2	Finishes: W2, B2, C2, H2, HW2
7″ O.D. - 6″ I.D. - 6 ⅛″-8 ½″ H	7″ O.D. - 6″ I.D. - 6 ⅛″-8 ½″ H	7″ O.D. - 6″ I.D. - 4 ⅜″-6 ¾″ H

DIMS TO WARM SUNSET DIMMING TECHNOLOGY

*All Sunset LED Light Engines must be used with "SD" Housings

	ELCO 6″ Engines	Lume	Lumen	Color Temp	Finish	Beam Angle
Product Number Builder		**L**				
	E610* Reflector **E611*** Wall Wash **E618** Adjustable		**08** 850 lm **12** 1250 lm **16** 1600 lm **20** 2000 lm **30** 3000 lm **40** 4000 lm **60** 6000 lm	**27** 2700K (Up to 3000 lm) **30** 3000K **35** 3500K **40** 4000K **50** 5000K **SD** Sunset	**H2** All Haze **W2** All White **B2** All Black **C2** All Chrome **HW2** Haze/White Ring	60° (Standard) **-F** 36° **-N** 25° **-S** 10°

Example: **E610L2030W2** [ELCO 6″ Reflector, 2000 lm, 3000K, White Finish Trim]
*E610 & E611 Airtight

The Laurel™ **System**

Architectural Commercial LED Lighting

DIMMABLE · WET LOCATION · 5 YEAR WARRANTY · ASSEMBLED IN U.S.A.

8″ Round LED Architectural Frames with Driver

Description	Cat. #	Specs
 8″ New Construction Plaster Frame with Driver Opening: 8″ x 3 ½″ H	E8LFU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E8LFU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E8LFU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E8LFU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E8LFU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	E8LFU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
	E8LFU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
 8″ Remodel Frame with Driver Opening: 8″ x 7″ H	E8LRU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E8LRU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E8LRU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E8LRU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E8LRU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	E8LRU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
	E8LRU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
 8″ Retrofit Kit with Driver Height: 3 ½″ Width: 5″ Depth: 3″	E8LTU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E8LTU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E8LTU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E8LTU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E8LTU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	E8LTU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
	E8LTU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV

Product Number Builder	ELCO 8″ Round Frame	Voltage	Lumen	Dimming	Optional
	E8LH Architectural **E8LF** Plaster **E8LR** Remodel **E8LT** Retrofit Kit	**U** 120/277V	**08*** 850 lm **12*** 1250 lm **16*** 1600 lm **20*** 2000 lm **30** 3000 lm **40** 4000 lm **60** 6000 lm	**D2** Triac/ELV/0-10V **S** Sunset **L2** Lutron	**EM1** Emergency Backup up to 700 lm output **EM2** Emergency Backup up to 1100 lm output

Example: **E8LRU40D2** [ELCO 8″ Remodel Frame, 120/277V, 4000 lm, Triac/ELV/0-10V Dimming]

*IC Rated, up to 2000 lm

The Laurel™ **System**

Architectural Commercial LED Lighting

TITLE 24 COMPLIANT · DIMMABLE · WET LOCATION · 5 YEAR WARRANTY · 50,000 HOURS

8″ Round LED Light Engines

Round Reflector	Round Wall Wash	Round Adjustable
		
E810 Series	E811 Series	E818 Series
Finishes: W2, B2, C2, H2, HW2	Finishes: W2, B2, C2, H2, HW2	Finishes: W2, B2, C2, H2, HW2
9″ O.D. - 7 ½″ I.D. - 7 ⅞″-9 ¼″ H	9″ O.D. - 7 ½″ I.D. - 6 ⅞″-9 ¼″ H	9″ O.D. - 7 ½″ I.D. - 5 ⅝″-8″ H

DIMS TO WARM SUNSET DIMMING TECHNOLOGY *All Sunset LED Light Engines must be used with "SD" Housings

	ELCO 8″ Engines	Lume	Lumen	Color Temp	Finish	Beam Angle
Product		**L**				
Number	**E810*** Reflector **E811*** Wall Wash		**08** 850 lm **12** 1250 lm **16** 1600 lm **20** 2000 lm **30** 3000 lm **40** 4000 lm **60** 6000 lm	**27** 2700K (Up to 3000 lm) **30** 3000K **35** 3500K **40** 4000K **50** 5000K **SD** Sunset	**H2** All Haze **W2** All White **B2** All Black **C2** All Chrome **HW2** Haze/White Ring	60° (Standard) **-F** 36° **-N** 25° **-S** 10°
Builder	**E818** Adjustable					

Example: **E810L2030W2** [ELCO 8″ Reflector, 2000 lm, 3000K, White Finish Trim]
*E810 & E811 Airtight

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The Laurel™ **System**

Architectural Commercial LED Lighting

DIMMABLE · WET LOCATION · 5 YEAR WARRANTY · ASSEMBLED IN U.S.A.

9″ Round LED Architectural Frames with Driver

Description	Cat. #	Specs
 9″ Retrofit Kit with Driver Height: 3 ½″ Width: 5″ Depth: 3″	E9LTU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E9LTU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV

Product Number Builder	ELCO 9″ Round Frame	Voltage	Lumen	Dimming	Optional
	E9LH Architectural **E9LT** Retrofit Kit	**U** 120/277V	**08*** 850 lm **12*** 1250 lm **16*** 1600 lm **20*** 2000 lm **30** 3000 lm **40** 4000 lm **60** 6000 lm	**D2** Triac/ELV/0-10V **S** Sunset **L2** Lutron	**EM1** Emergency Backup up to 700 lm output **EM2** Emergency Backup up to 1100 lm output

Example: **E9LTU30D2** [ELCO 9″ Retrofit Kit, 120/277V, 3000 lm, Triac/ELV/0-10V Dimming]
*IC Rated, up to 2000 lm

9″ Round LED Light Engines

Square Reflector



E910 Series

Finishes:
W2, B2, C2, H2, HW2

11 ½″ O.D. - 9 ½″ I.D. - 13 ¼″-15 ⅝″ H

DIMS TO WARM SUNSET DIMMING TECHNOLOGY *All Sunset LED Light Engines must be used with "SD" Housings

Product Number Builder	ELCO 9″ Engines	Lume	Lumen	Color Temperature	Finish	Beam Angle
	E910* Reflector	**L**	**08** 850 lm **12** 1250 lm **16** 1600 lm **20** 2000 lm **30** 3000 lm **40** 4000 lm **60** 6000 lm	**27** 2700K (Up to 3000 lm) **30** 3000K **35** 3500K **40** 4000K **50** 5000K **SD** Sunset	**H2** All Haze **W2** All White **HW2** Haze/White Ring	60° (Standard) **-F** 36° **-N** 25° **-S** 10°

Example: **E910L6050HW2** [ELCO 9″ Reflector, 6000 lm, 5000K, Haze with White Ring]
*E910 Airtight


The **Alpine™ System**

Recessed Housings & Trims


FOR LED & NON-LED MR16 LAMPS (GU5.3, GU10, PSA37)



SIZES



STYLES



FINISHES



LAMPS



The Alpine™ **System**

MR16 Recessed fixtures

IC RATED · IN TODAY OUT TODAY · TITLE 24 COMPLIANT · DIMMABLE

3" GU10 Housings

	Description	CAT. #	Specs
	3" New Construction IC Airtight Housing for GU10 LED 5" Height	EL39LDICA	12W MAX. 120V
		EL39LDICA-7	12W MAX. with 277V to 120V Step-Down Transformer
	3" Remodel IC Airtight Housing for GU10 LED 5" Height	EL39LDRICA	12W MAX. 120V
	3" Double Wall Shallow IC Housing for MAX. 50W GU10 7 ¼" Height	EL39ICA	50W MAX. 120V
	3" New Construction Housing with Thermal Protector for MAX. 50W GU10. Non-IC 4 ⅞" Height	EL39A	50W MAX. 120V
	3" Remodel Construction Housing with Thermal Protector for MAX. 50W GU10. Non-IC 5 ⅜" Height	EL39RA	50W MAX. 120V

3" Dedicated LED Housings

	Description	CAT. #	Specs
	3" LED New Construction IC Airtight Housing with Quick Connect terminal 5 ½" Height	EL390ICA	14W MAX. 120V
		EL390ICA-7	14W MAX. with 277V to 120V Step-Down Transformer
	3" LED Remodel IC Airtight Housing with Quick Connect terminal 5 ½" Height	EL390RICA	14W MAX. 120V
	LED MR16 with Quick Connect Lamp	PSA37	7W, 3000K, 500 lm, 120V
		PSA37-27	7W, 2700K, 500 lm, 120V
		PSA37-35	7W, 3500K, 500 lm, 120V
		PSA37-40	7W, 4000K, 500 lm, 120V

3" Bi-Pin MR16 LED Lamp Housings

	Description	CAT. #	Specs
	3" Low Voltage Housing for LED MR16 Bi-Pin Lamp 5 ½" Height	EL2699LDICA	12W MAX. Magnetic Transformer, 12V
		EL2699LDICEA	12W MAX. Electronic Transformer, 12V
	3" Low Voltage IC Remodel Housing for LED MR16 Bi-Pin Lamp 5 ⅜" Height	EL2699LDRICA	12W, Magnetic Transformer, 12V
		E2699LDRICEA	12W, Electronic Transformer, 12V

The Alpine™ **System**

MR16 Recessed fixtures

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

3" Low Voltage IC & Non IC Housings for MR16 Bi-Pin

	Description	CAT. #	Specs
	3" Low Voltage IC Housing for MR16 Bi-Pin Lamp 7 ¼" Height	EL2699ICA	50W MAX. 12V
		EL2699ICEA	50W MAX. Electronic Transformer
	3" Low Voltage Airtight Housing for MR16 Bi-Pin Lamp. Non-IC 4 ⅜" Height	EL2699A	50W MAX. Magnetic Transformer
		EL2699EA	50W MAX. Electronic Transformer
	3" Low Voltage Airtight Remodel Housing for MR16 Bi-Pin Lamp. Non-IC 5 ½" Height	EL2699RA	50W MAX.
		EL2699REA	50W MAX. Electronic Transformer

3" MR16 Trims (For LED 2-Wire, Bi-Pin or GU10 MR16 Lamps)

	Description	CAT. #	Specs
	3" Die-cast Round Lensed Shower Trim with Frosted Glass Lens. WET LOCATION 4 5⁄16" O.D.	EL2612W	All White
	3" Die-cast Round Clear Lensed Shower Trim WET LOCATION 4 5⁄16" O.D.	EL2613W	All White
	3" Die-Cast Pinhole Trim with Reflector 1 ⅞" I.D. - 4 5⁄16" O.D.	EL2619WW	All White
		EL2619BB	All Black
		EL2619WC	Chrome w/White Ring
		EL2619WB	Black w/White Ring
	3" Die-cast Round Slot Aperture Trim 4 5⁄16" O.D. - 45° Adjustability	EL2620W	White, 45° Adjustability
		EL2620B	Black, 45° Adjustability
	3" Die-Cast Adjustable Reflector Trim 4 5⁄16" O.D.	EL2621W	All White, 25° Adjustability
		EL2621B	Black w/White Ring, 25° Adjustability
		EL2621BB	All Black, 25° Adjustability
		EL2621BZ	All Bronze, 25° Adjustability
		EL2621C	Chrome w/White Ring, 25° Adjustability
		EL2621CC	All Clear, 25° Adjustability
		EL2621H	Haze w/White Ring, 25° Adjustability
	3" Adjustable Wall Wash Reflector Trim 4 5⁄16" O.D.	EL2622W	All White, 45° Adjustability, Rotate 359°
		EL2622B	Black/White Ring, 45° Adjustability, Rotate 359°

The Alpine™ **System**

MR16 Recessed fixtures

IC RATED · IN TODAY OUT TODAY · TITLE 24 COMPLIANT · DIMMABLE

3" MR16 Trims (For LED 2-Wire, Bi-Pin or GU10 MR16 Lamps)

	Description	CAT. #	Specs
	3" Die-Cast Louvered Bottom Trim 4 5/16" O.D.	EL2633W	All White
		EL2633B	All Black
	3" Cross Blade Reflector Trim 4 5/16" O.D.	EL2644W	All White
		EL2644B	Black/White Ring
		EL2644C	Chrome/White Ring
		EL2644G	Gold/White Ring
	3" Die-Cast Glass Trim 4 5/16" O.D.	EL2652BL	Blue/White Ring
	3" Die-Cast Adjustable Pull Down Trim 4 5/16" O.D.	EL2688W	All White, 30° Adjustability, 358° Rotation
		EL2688B	All Black, 30° Adjustability, 358° Rotation
	3" Die-Cast Adjustable Baffle Trim 4 5/16" O.D.	EL2693W	All White, 25° Adjustability
		EL2693B	Black/White Ring, 25° Adjustability
		EL2693BB	All Black, 25° Adjustability
		EL2693BZ	All Bronze, 25° Adjustability
		EL2693BN	Black/Nickel Ring, 25° Adjustability
		EL2693WN	White/Nickel Ring, 25° Adjustability
	3" Adjustable Wall Wash Scoop with Baffle Trim 4 5/16" O.D.	EL2695W	All White
		EL2695B	All Black
	3" Die-cast Adjustable Eyeball Trim 4 5/16" O.D.	EL2698WW	All White, 30° Tilt
	3" Die-cast Square Adjustable Reflector Trim 4 5/16" Sq.	EL2321W	All White, 30° Adjustability
		EL2321C	Chrome/White Ring, 30° Adjustability
		EL2321BZ	All Bronze, 30° Adjustability

The Alpine™ **System**

MR16 Recessed fixtures



IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

3" MR16 Trims (For LED 2-Wire, Bi-Pin or GU10 MR16 Lamps)

	Description	CAT. #	Specs
	3" Die-Cast Adjustable Trim 4 5⁄16" Sq.	EL2388W	All White, 30° Tilt
		EL2388B	All Black, 30° Tilt
		EL2388BZ	All Bronze, 30° Tilt
	3" Die-Cast Adjustable Wall Wash Reflector Trim 4 5⁄16" Sq.	EL2322W	All White, 45° Adjustability
		EL2322B	Black/White Ring, 45° Adjustability
	3" Square on Round Baffle Trim 4 5⁄16" Sq.	EL2393W	All White
		EL2393B	Black/White Ring
		EL2393BZ	All Bronze
		EL2393BB	All Black
	3" Die-Cast Wall Wash Baffle Trim 4 5⁄16" Sq.	EL2395W	All White
		EL2395B	Black/White Ring
	3" Die-Cast Reflector Trim with Square Pinhole 4 5⁄16" Sq.	EL2382W	All White, 30° Tilt
		EL2382C	Chrome/White Ring, 30° Tilt
		EL2382BB	All Black, 30° Tilt
		EL2382BZ	All Bronze, 30° Tilt
	3" Die-Cast Baffle Trim with Square Pinhole 4 5⁄16" Sq.	EL2384W	All White, 30° Tilt
		EL2384B	All Black, 30° Tilt
		EL2384BZ	All Bronze, 30° Tilt

The Alpine™ **System**

MR16 Recessed fixtures

IC RATED · IN TODAY OUT TODAY · TITLE 24 COMPLIANT · DIMMABLE

4" GU10 Housings

	Description	CAT. #	Specs
	4" New Construction IC Airtight Housing with Thermal Protector 5 ⅛" Height	EL49LDICA	12W MAX. 120V
		EL49LDICA-7	Step-down transformer 277V to 120V
	4" New Construction Shallow IC Airtight Housing 3 ½" Height	EL49LDICAS	12W MAX. 120V
	4" Remodel IC Airtight Housing with Thermal Protector 5 ½" Height	EL49LDRICA	12W MAX. 120V
	4" Double Wall New Construction IC Housing with Thermal Protector for MAX. 50W GU10 - 7 ¼" Height	EL49ICA	50W MAX. 120V
	4" New Construction Housing with Thermal Protector for MAX. 50W GU10. Non-IC 5 ⅛" Height	EL49A	50W MAX. 120V
	4" Remodel Construction Housing with Thermal Protector for MAX. 50W GU10. Non-IC 5 ½" Height	EL49RA	50W MAX. 120V

4" Dedicated LED Housings for PSA37

	Description	CAT. #	Specs
	4" IC Airtight New Construction Housing with Quick Connect Terminal 5 ½" Height	EL490ICA	18W MAX. 120V
		EL490ICA-7	Step-down transformer 277V to 120V
		EL490ICA-EM5	Emergency Battery Back-Up
	4" Remodel IC Airtight Housing with Quick Connect Terminal 5 ½" Height	EL490RICA	12W MAX. 120V

4" Bi-Pin MR16 LED Lamp Housings

	Description	CAT. #	Specs
	4" New Construction IC Housing for Bi-Pin G5.3 LED 5 ½" Height	EL1499LDICA	12W MAX. Magnetic Transformer, 12V
		EL1499LDICAS	Shallow, 3 ½" Height
		EL1499LDICEA	12W MAX. Electronic Transformer, 12V
		EL1499LDICEAS	Shallow, 3 ½" Height
	4" Remodel IC Housing for Bi-Pin G5.3 LED 5 ½" Height	EL1499LDRICA	12W, Magnetic Transformer, 12V
		EL1499LDRICAS	Shallow, 3 ½" Height
		E1499LDRICEA	12W, Electronic Transformer, 12V
		E1499LDRICEAS	Shallow, 3 ½" Height

The Alpine™ **System**

MR16 Recessed fixtures




IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

4" Low Voltage IC & Non IC Housings

	Description	CAT. #	Specs
	4" Low Voltage Airtight IC Housing 7 ¼" Height	EL1499ICA	50W MAX. 12V
		EL1499ICEA	50W MAX. Electronic Transformer
	4" Low Voltage Airtight Housing for MR16 Bi-Pin Lamp. Non-IC 5 ½" Height	EL1499A	50W MAX. Magnetic Transformer
		EL1499EA	50W MAX. Electronic Transformer
	4" Low Voltage Remodel Housing for MR16 Bi-Pin Lamp. Non-IC 5 ½" Height	EL1499RA	50W MAX. 120V Magnetic Transformer
		EL1499REA	50W MAX. 120V Electronic Transformer
	4" Low Voltage Shallow Housing for MR16 Bi-Pin Lamp. Non-IC 3 ⅛" Height	EL1499S	50W MAX. 120V Magnetic Transformer
		EL1499ES	50W MAX. Electronic Transformer
	4" Low Voltage Shallow Remodel Housing for MR16 Bi-Pin Lamp. Non-IC 3 ⅝" Height	EL1499RS	50W MAX. 120V Magnetic Transformer
		EL1499RES	50W MAX. Electronic Transformer
	4" Double Wall New Construction ICA R-60 Foam Insulation Housing 5 ½" Height	EL1499AJICEA	12W MAX. 12V Electronic Transformer

4" Low Voltage Housings for Remote Transformers

	Description	CAT. #	Specs
	4" Thermally Protected Housing for Remote Transformer 4" Height	E400	35W MAX. 12V
	4" Thermally Protected Plater Frame Housing for Remote Transformer 4" Height	E450	35W MAX. 120V

The Alpine™ **System**

MR16 Recessed fixtures

IC RATED · IN TODAY OUT TODAY · TITLE 24 COMPLIANT · DIMMABLE

4" MR16 Trims (For LED 2-Wire, Bi-Pin or GU10 MR16 Lamps)

	Description	CAT. #	Specs
	4" Adjustable Shower Trim with Clear Reflector and Lens Trim (WET LOCATION) 4 ¾" O.D.	EL1411W	White, 25° Tilt
		EL1411B	Black, 25° Tilt
		EL1411N	Nickel, 25° Tilt
		EL1411BZ	Bronze, 25° Tilt
		EL1411SH	Lexan, 25° Tilt
	4" Adjustable Shower Trim with Clear Reflector and Frosted Lens Trim 4 ¾" O.D.	EL1412W	White, 45° Adjustability
		EL1412B	White, 45° Adjustability
		EL1412N	White, 45° Adjustability
		EL1412BZ	Bronze, 45° Adjustability
		EL1412SH	Lexan, 45° Adjustability
	4" Adjustable Shower Trim with Clear Reflector and Frosted Glass Pinhole Trim 4 ¾" O.D.	EL1415W	White
		EL1415B	Black
		EL1415G	Gold
		EL1415N	Nickel
		EL1415BZ	Bronze
		EL1415SH	Lexan
	4" Shower Trim with Round Drop Frosted Lens Trim 4 ¾" O.D.	EL1416W	White
	4" Pinhole Aperture with Baffle Trim 1 ⅞" I.D. - 4 ¾" O.D.	EL1419W	White
	4" Adjustable Reflector Trim 4 ¾" O.D.	EL1421W	All White, 25° Tilt
		EL1421B	Black/White Ring, 25° Tilt
		EL1421BB	All Black, 25° Tilt
		EL1421BZ	All Bronze, 25° Tilt
		EL1421C	Chrome/White Ring, 25° Tilt
		EL1421CN	Chrome/Nickel Ring, 25° Tilt
	4" Adjustable Slot Spinnable Aperture Trim 4 ¾" O.D.	EL1420W	White, 45° Tilt
		EL1420B	Black, 45° Tilt
		EL1420G	Gold, 45° Tilt
		EL1420BZ	Bronze, 45° Tilt
	4" Adjustable Wall Wash Reflector Trim 4 ⅞" O.D.	EL1422W	All White, 359° Rotation
		EL1422B	All Black, 359° Rotation
	4" Adjustable Pinhole with Baffle Trim 4 ¾" O.D.	EL1423W	All White, 25° Tilt, 2" Aperture
		EL1423B	Black/White Ring, 25° Tilt, 2" Aperture
		EL1423BZ	All Bronze, 25° Tilt, 2" Aperture

The Alpine™ **System**

MR16 Recessed fixtures



IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

4" MR16 Trims (For LED 2-Wire, Bi-Pin or GU10 MR16 Lamps)

	Description	CAT. #	Specs
	4" Adjustable Pinhole with Reflector Trim 2" I.D. - 4 ¾" O.D.	EL1429W	All White, 25° Tilt
		EL1429B	Black/White Ring, 25° Tilt
		EL1429C	Chrome/White Ring, 25° Tilt
		EL1429BBZ	Black/Bronze Ring, 25° Tilt
	4" Adjustable Slot Aperture One Piece Trim 4 ¾" O.D.	EL1430W	White, 25° Tilt
	4" Reflector Cross Blade Trim 4 ⅞" O.D.	EL1444C	Chrome/White Ring
	4" Adjustable Reflector Wall Wash Trim 4 ¾" O.D.	EL1445W	All White, 45° Tilt
		EL1445B	Black/White Ring, 45° Tilt
		EL1445C	Chrome/White Ring, 45° Tilt
	4" Frosted Glass Trim 4 ¾" O.D.	EL1452R	Red Glass/White Ring
	4" Frosted Stepped Glass Trim 4 ¾" O.D.	EL1453BL	Blue Glass/White Ring
	4" Die-Cast Adjustable Spot Trim 4 ¾" O.D.	EL1488W	All White, 0° - 30° Tilt
		EL1488B	All Black, 0° - 30° Tilt
		EL1488BZ	All Bronze, 0° - 30° Tilt
	4" Adjustable Phenolic Step Baffle Trim 4 ¾" O.D.	EL1493W	All White, 25° Tilt
		EL1493B	Black/White Ring, 25° Tilt
		EL1493BB	All Black, 25° Tilt
		EL1493BZ	All Bronze, 25° Tilt
		EL1493DW	All White Die-Cast Trim, 25° Tilt
		EL1493DB	Black/White Die-Cast Trim, 25° Tilt

The Alpine™ **System**

MR16 Recessed fixtures

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

4" MR16 Trims (For LED 2-Wire, Bi-Pin or GU10 MR16 Lamps)

	Description	CAT. #	Specs
	4" Square Baffle Trim 4 ¾" Sq.	EL1491W	All White
		EL1491B	Black/White Ring
	4" Adjustable Wall Wash Baffle Trim 4 ¾" O.D.	EL1495W	All White
		EL1495B	Black/White Ring
	4" Adjustable Pull Down Trim 5 ⅛" O.D.	EL1497W	All White, 0° - 90° Tilt, 359° Rotation
		EL1497B	All Black, 0° - 90° Tilt, 359° Rotation
		EL1497BZ	All Bronze, 0° - 90° Tilt, 359° Rotation
	4" Shower Trim with Clear Lens 4 ¾" Sq.	EL2411W	Chrome/White Ring
	4" Shower Trim with Frosted Lens 4 ¾" Sq.	EL2412W	White
		EL2412B	Black
		EL2412BZ	Bronze
	4" Shower Trim with Frosted Pinhole Lens 4 ¾" Sq.	EL2415W	White
		EL2415BZ	Bronze
	4" Round Drop Lens Shower Trim 4 ¾" Sq.	EL2416W	White
	4" Adjustable Slot Rotatable Aperture Trim 4 ⅞" Sq.	EL2420W	White
		EL2420B	Black
	4" Specular Reflector Trim 4 ¾" Sq.	EL2421W	All White
		EL2421B	Black/White Ring
		EL2421C	Chrome/White Ring
		EL2421BZ	All Bronze

The Alpine™ **System**

MR16 Recessed fixtures



IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

4" MR16 Trims (For LED 2-Wire, Bi-Pin or GU10 MR16 Lamps)

	Description	CAT. #	Specs
	4" Adjustable Gimbal with Baffle Trim 4 ¾" Sq.	EL2440W	White, 25° Tilt
		EL2440B	Black, 25° Tilt
	4" Adjustable Gimbal Trim 4 ¾" Sq.	EL2443W	White, 25° Tilt
	4" Adjustable Wall Wash Reflector Trim 4 ⅞" Sq.	EL2445W	All White, 25° Tilt
		EL2445B	Black/White Ring, 25° Tilt
		EL2445C	Chrome/White Ring, 25° Tilt
		EL2445G	Gold/White Ring, 25° Tilt
	4" Frosted Glass Square Trim 4 ⅞" Sq.	EL2452R	Red/White Ring
	4" Frosted Stepped Glass Trim 4 ⅞" Sq.	EL2453BL	Blue/White Ring
	4" Steel Construction Adjustable Reflector Trim 5" Sq.	EL2482W	All White
	4" Die-Cast Aluminum Adjustable Baffle Trim 4 ¾" Sq.	EL2484W	White
		EL2484B	Black
	4" Die-Cast Adjustable with Square Trim 4 ¾" Sq.	EL2488W	White, 0° - 30° Tilt
		EL2488B	Black, 0° - 30° Tilt
	4" Phenolic Baffle Trim 4 ¾" Sq.	EL2493W	All White
		EL2493B	Black w/White Ring
		EL2493BB	All Black
		EL2493BZ	All Bronze
		EL2493BBZ	Black/Bronze Ring
	4" Phenolic Deep Baffle Trim 4 ⅞" Sq.	EL2494W	All White
	4" Wall Wash with Baffle Trim 4 ⅞" Sq.	EL2495W	All White
		EL2495B	Black/White Ring
	4" Pull Down Trim 4 ¾" Sq.	EL2497W	White
		EL2497B	Black
		EL2497BZ	Bronze

The Alpine™ **System**



MR16 Recessed fixtures

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

6" Dedicated LED Housings

	Description	CAT. #	Specs
	6" Dedicated LED IC Airtight New Construction Housings with Quick Connect terminal	EL770ICA	120V, 7" Height
		EL770ICA-7	Step-down transformer 277V to 120V
		EL760ICA	Shallow, 120V, 5 ½" Height
		EL760ICA-7	Step-down transformer 277V to 120V
	6" Dedicated LED IC Airtight Remodel Housings with Quick Connect terminal	EL770RICA	120V, 7 ½" Height
		EL760RICA	Shallow, 120V, 5 ½" Height
	LED MR16 with Quick Connect Lamp	PSA37	7W, 3000K, 500 lm, 120V
		PSA37-27	7W, 2700K, 500 lm, 120V
		PSA37-35	7W, 3500K, 500 lm, 120V
		PSA37-40	7W, 4000K, 500 lm, 120V

6" Low Voltage IC & Non IC Housings & **MR16** Trims

	Description	CAT. #	Specs
	6" Low Voltage Double Wall IC Airtight New Construction Housing 7 ⅜" Height	EL7LVICA	50W MAX. 12V
	6" Low Voltage New Construction Housing 7 ½" Height	EL7LV	75W MAX. 12V
	6" Low Voltage Remodel Housing 7 ½" Height	EL7RLV	75W MAX. 12V
	6" Adjustable Spot with Phenolic Baffle Trim 7 ¼" O.D.	EL2510W	All White
	6" Adjustable Reflector Trim 7 ⅝" O.D.	EL2516W	All White
		EL2516B	Black/White Ring
		EL2516C	Chrome/White Ring
		EL2516H	Haze/White Ring
	6" Adjustable Baffle Trim 8" O.D.	EL2530W	All White
		EL2530B	Black/White Ring


The Alpine™ **System**

MR16 Recessed fixtures




IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

6" MR16 Trims

	Description	CAT. #	Specs
	6" Adjustable Slot Aperture Trim 8" O.D.	EL2550W	White
		EL2550B	Black
	6" Pinhole with Baffle Trim 1 ¾" I.D. - 8" O.D.	EL2579W	White
		EL2579B	Black
	6" Adjustable Pull Down Trim 7 ¼" O.D.	EL2597W	White, 0° - 90° Tilt, 359° Rotation
		EL2597B	Black, 0° - 90° Tilt, 359° Rotation

6" Retrofit Trims (12V Magnetic Transformer Included)



	Description	CAT. #	Specs
	6" Adjustable Spot with Phenolic Baffle Trim 7 ¼" O.D.	EL1510W	All White
		EL1510B	Black/White Ring
	6" Adjustable Reflector Trim 7 ⅝" O.D.	EL1516W	All White
		EL1516B	Black/White Ring
		EL1516C	Chrome/White Ring
	6" Adjustable Baffle Trim 7 ¼" O.D.	EL1530W	All White
		EL1530B	Black/White Ring
	6" Adjustable Slot Aperture Trim 7 ¼" O.D.	EL1550W	White
	6" Baffle with Pinhole Trim 1 ¾" I.D. - 8" O.D.	EL1579W	White
	6" Adjustable Pull Down Trim 7 ¼" O.D.	EL1597W	White
		EL1597B	Black

Line **Voltage**

For LED & Non-LED PAR, R, A and GU24 Based Lamps

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

4" Line Voltage IC & Non IC Housings

	Description	CAT. #	Specs
	4" IC Airtight Housing with Adjustable Lamp Holder 5 ½" Height	EL99ICA	50W MAX. 120V Lamp: E26 Base LED or Incandescent
	4" IC Airtight Remodel Housing with Adjustable Lamp Holder 6 ¼" Height	EL99RICA	50W MAX. 120V Lamp: E26 Base LED or Incandescent
	4" IC Airtight New Construction 2-Hour Fire Rated Housing 7 ¾" Height	EL99FICA	35W MAX. 120V Lamp: E26 Base LED or Incandescent
	**R-60 Foam Insulation** 4" Medium Base IC Airtight New Construction Housing (Suitable for Chicago Plenum construction) 5 ½" Height	EL99AJICA	20W MAX. 120V Lamp: E26 Base LED or Incandescent
	4" IC Airtight New Construction Housing 5 ½" Height	EL99LDICA	12W MAX. 120V Lamp: E26 Base LED Lamps
	4" Housing with Adjustable Lamp Holder 5 ½" Height	EL99A	50W MAX. 120V Lamp: 55W PAR16, 50W PAR20, or R20
	4" Remodel Housing with Adjustable Lamp Holder 5 ½" Height	EL99RA	50W MAX. 120V Lamp: 55W PAR16, 50W PAR20, or R20
	4" Airtight IC Housing with GU24 Base Socket 5 ¾" Height	EL99ICA-G24	18W MAX. 120V Lamp: GU24 LED or CFL
	4" Airtight IC Remodel Housing with GU24 Base Socket 6 ½" Height	EL99RICA-G24	18W MAX. 120V Lamp: GU24 LED or CFL

4" Line Voltage Trims


	Description	CAT. #	Specs
	4" Airtight Smooth Cone Reflector Trim 5 1⁄16" O.D.	EL901W	All White Lamp: 75W MAX PAR30
		EL901C	All Black
	4" Airtight Baffle Cone Trim 5 1⁄16" O.D.	EL902W	All White Lamp: 75W MAX PAR30
	4" Shower Trim with Clear Lens 4 ¾" O.D.	EL911W	White, Lamp: 30W R20
		EL911B	Black
		EL911SH	Lexan Ring
	4" Shower Trim with Frosted Lens 4 ¾" O.D.	EL912W	All White, Lamp: 30W R20
		EL912B	All Black
		EL912BZ	All Bronze
		EL912N	All Nickel
		EL912SH	Lexan Ring

Line **Voltage**

For LED & Non-LED PAR, R, A and GU24 Based Lamps

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

4" Line Voltage Trims

	Description	CAT. #	Specs
	4" Shower Trim with Fresnel Lens 4 ¾" O.D.	EL913W	White, Lamp: 30W R20
		EL913B	Black
		EL913SH	Lexan Ring
	4" Shower Trim with Frosted Pinhole Glass 4 ¾" O.D.	EL915W	White, Lamp: 30W R20
		EL915B	Black
		EL915BZ	Bronze
		EL915SH	Lexan Ring
	4" Shower Trim with Drop Opal Lens 4 ¾" O.D.	EL916W	White, Lamp: 30W R20
		EL916B	Black
		EL916SH	Lexan Ring
	4" Wall Wash with Reflector Trim 4 ¾" O.D.	EL925W	All White, Lamp: 50W PAR20 or R20
		EL925C	Chrome/White Ring
	4" Open Trim 4 ¾" O.D.	EL930W	White, Lamp: 50W PAR30
	4" Adjustable Gimbal Ring Trim 4 ¾" O.D.	EL985W	White, Lamp: 50W PAR20
		EL985B	Black
		EL985BZ	Bronze
	4" Adjustable Spot Trim (Not for use in IC Housings) 4 ¾" O.D.	EL988W	White Lamp: 50W JDR or MR16 with PSA28
		EL988B	Black
	4" Pinhole Trim 2" I.D. - 4 ¾" O.D.	EL990W	White, Lamp: 30W-50W R20, 50W PAR20
		EL990BB	Black
		EL990BZ	Bronze




Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

Line **Voltage**

for LED & Non-LED PAR, R, A and GU24 Based Lamps

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

4" Line Voltage Trims

	Description	CAT. #	Specs
	4" Baffle Trim 4 ¾" Sq.	EL991W	All White Lamp: 40W A19 or R16, 50W PAR20 or R20
		EL991B	Black/White Ring
	4" Wall Wash Baffle Trim 4 ¾" O.D.	EL992W	All White, Lamp: 40W A19 or R16, 50W PAR20 or R20
		EL992B	Black/White Ring
		EL992KW	All White with Bracket
	4" Phenolic Step Baffle Trim 4 ¾" O.D.	EL993W	All White, Lamp: 40W A19 or R16, 50W PAR20 or R20
		EL993B	Black/White Ring
		EL993N	All Nickel
		EL993BB	All Black
		EL993BZ	All Bronze
		EL993BN	Black/Nickel Ring
		EL993MW	All Metal White
		EL993MB	Black/White Metal Ring
	4" Baffle Trim with Lampholder Bracket 4 ¾" O.D.	EL993KW	All White, Lamp: 50W PAR20 or R20
		EL993KB	Black/White Ring
		EL993KBZ	All Bronze
	4" Stepped Phenolic Baffle Trim 4 ¾" O.D.	EL994W	All White Lamp: 40W A19 or R16, 50W PAR20 or R20
	4" Stepped Phenolic Deep Baffle Trim 4 ¾" O.D.	EL994DW	All White Lamp: 40W A19 or R16, 50W PAR20 or R20
	4" Baffle Trim with Socket Bracket 4 ¾" O.D.	EL995W	All White, Lamp: 55W PAR16, 50W PAR20 or R20
		EL995B	Black/White Ring
		EL995N	All Nickel
		EL995BZ	All Bronze
	4" Eyeball Trim 4 ¾" O.D.	EL998W	White, Lamp: 40W R16, 50W PAR20 or R20
	4" Reflector Trim with Socket Bracket 5" O.D.	EL999KW	All White, Lamp: 40W A19 or R16, 50W PAR20 or R20
		EL999KC	Chrome/White Ring

Line **Voltage**

for LED & Non-LED PAR, R, A and GU24 Based Lamps

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

4" Line Voltage Trims

	Description	CAT. #	Specs
	4" Reflector Trim 5" O.D.	EL999W	All White, Lamp: 40W A19 or R16, 50W PAR20 or R20
		EL999B	Black/White Ring
		EL999BB	All Black
		EL999BZ	All Bronze
		EL999C	Clear/White Ring
		EL999H	Haze/White Ring
	4" Shower Reflector Trim with Clear Lens 4 ¾" O.D.	EL9111W	White, Lamp: 40W A19, 50W PAR20
	4" Shower Reflector Trim with Frosted Lens 4 ¾" O.D.	EL9112W	White, Lamp: 40W A19, 50W PAR20
	4" Shower Reflector Trim with Fresnel Lens 4 ¾" O.D.	EL9113W	White, Lamp: 40W A19, 50W PAR20
	4" Shower Reflector Trim with Frosted Pinhole Glass 4 ¾" O.D.	EL9115W	White, Lamp: 40W A19, 50W PAR20
	4" Shower Reflector Trim with Drop Opal Lens 4 ¾" O.D.	EL9116W	White, Lamp: 50W PAR20 or R20
	4" Shower Trim with Frosted Lens 4 ¾" O.D.	EL2912W	White, Lamp: 30W R20
	4" Shower Trim with Frosted Pinhole Glass 4 ¾" O.D.	EL2915W	White, Lamp: 30W R20
	4" Phenolic Baffle Trim 4 ¾" O.D.	EL2993W	All White, Lamp: 40W A19 or R16, 50W PAR20 or R20
		EL2993B	Black/White Ring
		EL2993BB	All Black

Line **Voltage**

for LED & Non-LED PAR, R, A and GU24 Based Lamps

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

4" Line Voltage Trims

	Description	CAT. #	Specs
	4" Deep Phenolic Baffle Trim 4 ¾" Sq.	EL2994W	All White Lamp: 40W A19 or R16, 50W PAR20 or R20
	4" Reflector Trim 4 ¾" Sq.	EL2999W	All White, Lamp: 50W PAR20 or R20
		EL2999B	Black/White Ring
		EL2999C	Clear/White Ring
		EL2999BZ	All Bronze
		EL2999KW	All White, with Socket Bracket
	4" Metal Reflector Trim 4 ⅞" Sq.	EL2982W	All White, Lamp: 50W PAR20
	4" Metal Baffle Trim 4 ⅞" Sq.	EL2983W	All White, Lamp: 50W PAR20
	4" Diecast Baffle Trim 4 ¾" Sq.	EL2984W	All White, Lamp: 50W PAR20
		EL2984B	All Black
	4" Gimbal Trim 4 ⅞" Sq.	EL2985W	All White, Lamp: 50W PAR20
		EL2985BZ	All Bronze
	4" Die-cast Reflector Trim 2 11/16" I.D. - 5" O.D.	ELL4810W	All White, Lamp: 50W PAR20
	4" Die-cast Lensed Reflector Trim 2 13/16" I.D. - 5" O.D.	ELL4812W	All White, Lamp: 50W PAR20
	4" Die-cast Baffle Trim 1 15/16" Sq. - 4 ½" Sq.	ELL4816W	All White, Lamp: 50W PAR20

Line **Voltage**

for LED & Non-LED PAR, R, A and GU24 Based Lamps



IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

5" Line Voltage IC & Non IC Housings

	Description	CAT. #	Specs
	5" Aluminum IC Airtight New Construction Housing 7 ⅜" Height	EL5ICA	75W MAX. 120V with Socket Bracket
		EL5ICANB	75W MAX. 120V, Housing without socket holder bracket.
	5" Aluminum IC Airtight Remodel Housing 7 ½" Height	EL5RICA	75W MAX. 120V, Includes gasket. Medium Base (E26),
	5" IC Airtight New Construction 2-Hour Fire Rated Housing 7 ¾" Height	EL5FICA	75W MAX. 120V, Medium Base (E26)
	5" Shallow Aluminum IC Airtight New Construction Housing 5 ½" Height	EL55ICA	75W, 120V, Includes gasket. Medium Base (E26)
	5" Shallow Aluminum IC Airtight Remodel Housing 5 ¼" Height	EL55RICA	75W, 120V, Includes gasket. Medium Base (E26)
	5" IC Airtight New Construction Housing with GU24 Base Socket 7 ⅜" Height	EL5ICA-G24	27W MAX. 120V, GU24 Base

5" Line Voltage Trims

	Description	CAT. #	Specs
	5" Metal Splay Baffle with White Trim Ring 6" O.D.	EL511W	All White, Lamp: 75W PAR30 or R30
		EL511B	Black/White Ring
	5" Shower Trim with Albalite Lens 6 ¼" O.D.	EL512W	All White, Lamp: 60W A19
		EL512SH	Lexan Ring

Line **Voltage**

for LED & Non-LED PAR, R, A and GU24 Based Lamps

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

5″ Line Voltage Trims


	Description	CAT. #	Specs
	5″ Shower Trim with Drop Opal Lens 6 ¼″ O.D.	EL516W	White, Lamp: 60W A19
		EL516SH	Lexan Ring
	5″ Adjustable Gimbal Ring 6 ¼″ O.D.	EL517W	All White, Lamp: 75W PAR30
	5″ Open Trim 6 ¼″ O.D.	EL530CP	Copper
		EL530KCP	Cooper with Socket Bracket
	5″ Airtight Metal Smooth Cone Reflector Trim 6 ¼″ O.D.	ELM501W	All White Lamp: 75W PAR30 or R30, 90W PAR38, 60W A19
	5″ Wall Wash Baffle Trim with Socket Bracket 6 ¼″ O.D.	ELM5045W	White, Lamp: 75W PAR30or R30
		ELM5045B	Black
	5″ Metal Stepped Baffle with Coil Springs Trim 6 ¼″ O.D.	ELM530W	All White, Lamp: 75W PAR30 or R30
		ELM530B	Black/White Ring
	5″ Metal Stepped Baffle with Socket Bracket and Torsion Springs Trims 6 ¼″ O.D.	ELM530KW	All White, Lamp: 75W PAR30 or R30
		ELM530KB	Black/White Ring
	5″ Reflector Trim 6 ¼″ O.D.	ELS520W	All White, Lamp: 50W-75W PAR20 or R20
		ELS520B	Black/White Ring

Line **Voltage**

for LED & Non-LED PAR, R, A and GU24 Based Lamps

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

6" Line Voltage IC & Non IC Housings


	Description	CAT. #	Specs
	6" IC Airtight New Construction Housing 7" Height	EL7ICA	90W, 120V, with Socket Bracket. Medium Base (E26)
		EL7ICANB	90W, 120V, Housing without socket holder bracket. Medium Base (E26)
	6" IC Airtight New Construction 2-Hour Fire Rated Housing 7 ¾" Height	EL7FICA	90W, 120V, Medium Base (E26)
	6" Double Wall IC Airtight New Construction Housing 7 ¼" Height	EL7IC100A	100W MAX. 120V, Medium Base (E26)
	6" IC Airtight Remodel Housing 7 ½" Height	EL7RICA	90W MAX. 120V, Includes gasket. Medium Base (E26)
	6" Shallow IC Airtight New Construction Housing 5 ½" Height	R9ICA	75W MAX. 120V, Includes gasket. Medium Base (E26)
	6" Shallow IC Airtight Remodel Housing 5 ½" Height	RR9ICA	75W MAX. 120V, Includes gasket. Medium Base (E26)
	6" IC Airtight New Construction Housing with GU24 Base Socket 7" Height	EL7ICA-G24	27W MAX. 120V, Medium Base (E26)
	6" Universal New Construction Housing 7 ½" Height	R10H	150W MAX. 120V, Medium Base (E26)
	6" Universal Remodel Housing 7 ½" Height	RR10H	150W MAX. 120V, Medium Base (E26)
	6" Shallow New Construction Housing 5 ½" Height	R9H	75W MAX. 120V Medium Base (E26)
	6" Shallow Remodel Housing 5 ½" Height	RR9H	75W MAX. 120V Medium Base (E26)

Line **Voltage**

for LED & Non-LED PAR, R, A and GU24 Based Lamps

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

6" Line Voltage Trims

	Description	CAT. #	Specs
	6" Shower Trim with Albalite Lens 8" O.D.	EL12W	White, Lamp: 60W A19
		EL12B	Black
		EL12BZ	Bronze
		EL12SH	Lexan Ring
	6" Shower Trim with Fresnel Lens 8" O.D.	EL13W	White, Lamp: 60W A19
		EL13B	Black
		EL13BZ	Bronze
		EL13SH	Lexan Ring
	6" Shower Trim with Drop Opal Lens 8" O.D.	EL16W	White, Lamp: 60W A19
		EL16SH	Lexan Ring
	6" Eyeball with Baffle Trim 8" O.D.	EL17W	White, Lamp: 75W PAR30 or R30
	6" Eyeball Trim 8" O.D.	EL18W	White, Lamp: 100W PAR30, 75W R30
		EL18B	Black
		EL18BZ	Bronze
	6" Open Trim with Coil Springs 8" O.D.	EL40W	All White, Lamp: 150W PAR38 or R40
		EL40BZ	All Bronze
		EL40C	All Clear
		EL40CP	All Copper
		EL40G	All Gold
	6" Open Splay Trim 8" O.D.	EL308W	White, Lamp: 75W PAR30 or R30
	6" Gimbal Ring Trim 8" O.D.	EL317W	White, Lamp: 50W-75W PAR30
		EL317BZ	Bronze
	6" Gimbal Ring Trim 8" O.D.	EL318W	All White, Lamp: 90W-150W PAR38
		EL318N	All Nickel

Line **Voltage**

for LED & Non-LED PAR, R, A and GU24 Based Lamps

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

6" Line Voltage Trims


	Description	CAT. #	Specs
	6" Adjustable Gimbal with Baffle Trim 7 ¼" O.D.	EL376W	White, Lamp: 75W PAR30
		EL376B	Black/White Ring
		EL376BZ	Bronze
	6" Adjustable Gimbal with Reflector Trim 7 ¼" O.D.	EL377W	All White, Lamp: 75W PAR30
	6" Adjustable Baffle Trim with Gimbal 7 ¼" O.D.	EL476W	All White, Lamp: 90W-150W PAR38
		EL476B	Black/White Ring
		EL476BZ	Bronze
	6" Adjustable Gimbal with Baffle Trim 7 ¼" O.D.	EL477W	All White, Lamp: 90W-150W PAR38
	6" Reflector Baffle Trim 7 ¼" O.D.	ELA101W	All White, Lamp: 75W PAR30, 100W A19
		ELA101B	Black/White Ring
		ELA101BZ	Bronze
		ELA101WA	All White, Metal Baffle
	6" Metal Step Baffle Trim 7 ¼" O.D.	ELM30W	All White, Lamp: 75W PAR30 or R30
		ELM30B	Black/White Ring
		ELM30BZ	All Bronze
		ELM30N	All Nickel
		ELM30BB	All Black
		ELM30BOV	Black/White Oversized Ring
		ELM30WOV	All White Oversized Ring
		ELM40W	All White, Lamp: 150W PAR38 or R40
		ELM40B	Black/White Ring
	6" Baffle Trim with Regressed Albalite Lens 7 ¼" O.D.	ELM42W	All White, Lamp: 60W A19
		ELM42B	Black/White Ring
		ELM42BZ	All Bronze
	6" Baffle Trim with Regressed Fresnel Lens 7 ¼" O.D.	ELM43W	All White, Lamp: 60W A19
		ELM43B	Black/White Ring
		ELM43BZ	All Bronze
	6" Metal Baffle Wall Wash Trim 7 ¼" O.D.	ELM45W	All White, Lamp: 60W A19, 75W R30
		ELM45B	Black/White Ring

Line **Voltage**

for LED & Non-LED PAR, R, A and GU24 Based Lamps

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

6" Line Voltage Trims

	Description	CAT. #	Specs
	6" Regressed Eyeball with Baffle Trim 7 ¼" O.D.	ELM48W	All White, Lamp: 75W R30
		ELM48B	Black/White Ring
	6" Airtight Metal Baffle Self-Flanged Cone Trim with Torsion Springs 7 ¼" O.D.	ELM300W	All White, Lamp: 75W PAR30 or R30, 90W PAR38
		ELM300B	Black/White Ring
		ELM300BB	All Black
		ELM300BZ	All Bronze
	6" Airtight Smooth Metal Cone Reflector Trim with Torsion Springs 7 ¼" O.D.	ELM301W	All White, Self-Flanged Lamp: 75W PAR30 or R30, 90W PAR38
	6" Airtight Metal Cone Baffle Trim with Clips 7 ¼" O.D.	ELM302W	White Lamp: 75W PAR30 or R30, 90W PAR38
		ELM302BB	All Black Lamp: 75W PAR30 or R30, 90W PAR38
	6" One Piece Self Flanged Baffle Trim with Clips 7 ¼" O.D.	ELM303W	White Lamp: 75W PAR30 or R30, 90W PAR38
		ELM303BB	All Black Lamp: 75W PAR30 or R30, 90W PAR38
	6" Shallow Self Flanged Baffle Trim with Torsion Springs 7 ¼" O.D.	ELM305W	White Lamp: 75W PAR30 or R30

Line **Voltage**

for LED & Non-LED PAR, R, A and GU24 Based Lamps

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

6″ Line Voltage Trims

	Description	CAT. #	Specs
	6″ Specular Reflector Trim 7 ¼″ O.D.	ELS30W	All White, Lamp: 75W PAR30 or R30
		ELS30C	Chrome/White Ring
	6″ Die-cast Reflector Trim 2 ¾″ I.D. - 7 ½″ O.D.	ELL6810W	All White, Lamp: PAR20 or R20
		ELL6810B	All Black
		ELL6810BZ	All Bronze
	6″ Die-cast Lensed Reflector Trim 2 ⅞″ I.D. - 7 ½″ O.D.	ELL6812W	All White, Lamp: PAR20 or R20
		ELL6812BZ	All Bronze
	6″ Die-cast Baffle Trim 2 ¾″ O.D. - 7 ½″ O.D.	ELL6813W	All White, Lamp: PAR20 or R20
		ELL6813BZ	All Bronze
	6″ Die-cast Wall Wash Trim 7 ½″ O.D.	ELL6815W	All White, Lamp: PAR20 or R20
		ELL6815BZ	All Bronze

Line **Voltage**

for LED & Non-LED PAR, R, A and GU24 Based Lamps

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE


8" Incandescent Square Housings & Trims

	Description	CAT. #	Specs
	8" Square Incandescent IC Single Wall Aluminum New Construction Housing 4 ⅝" Height	EL8SQ	75W MAX. 120V
	8" Square Incandescent IC Double Wall Aluminum New Construction Housing 7 ¼" Height	EL8SQICA	75W MAX. 120V
	8" Square LED Retrofit 3-CCT Insert 9 ⅜" Sq. - 1 ¼" H	EL881CT5W	19W, 1460 lm - 1520 lm, 3000K / 3500K / 4000K, 120/277V, Triac/ELV
	8" Square Trim with Prismatic Glass Lens 9 ⅜" Sq.	EL10W	White, Lamp: E26 PAR type
	8" Square Trim with Fresnel Lens 9 ½" Sq.	EL11W	White, Lamp: E26 PAR type

12" LED Square Retrofit

	Description	CAT. #	Specs
	12" Square LED Retrofit with 5-CCT Switch 12" Sq. - ⅝" H	EL1212CT5W	22W, 1450 lm, 2700K - 5000K, 120V, Triac/ELV

The **Slant**™ System

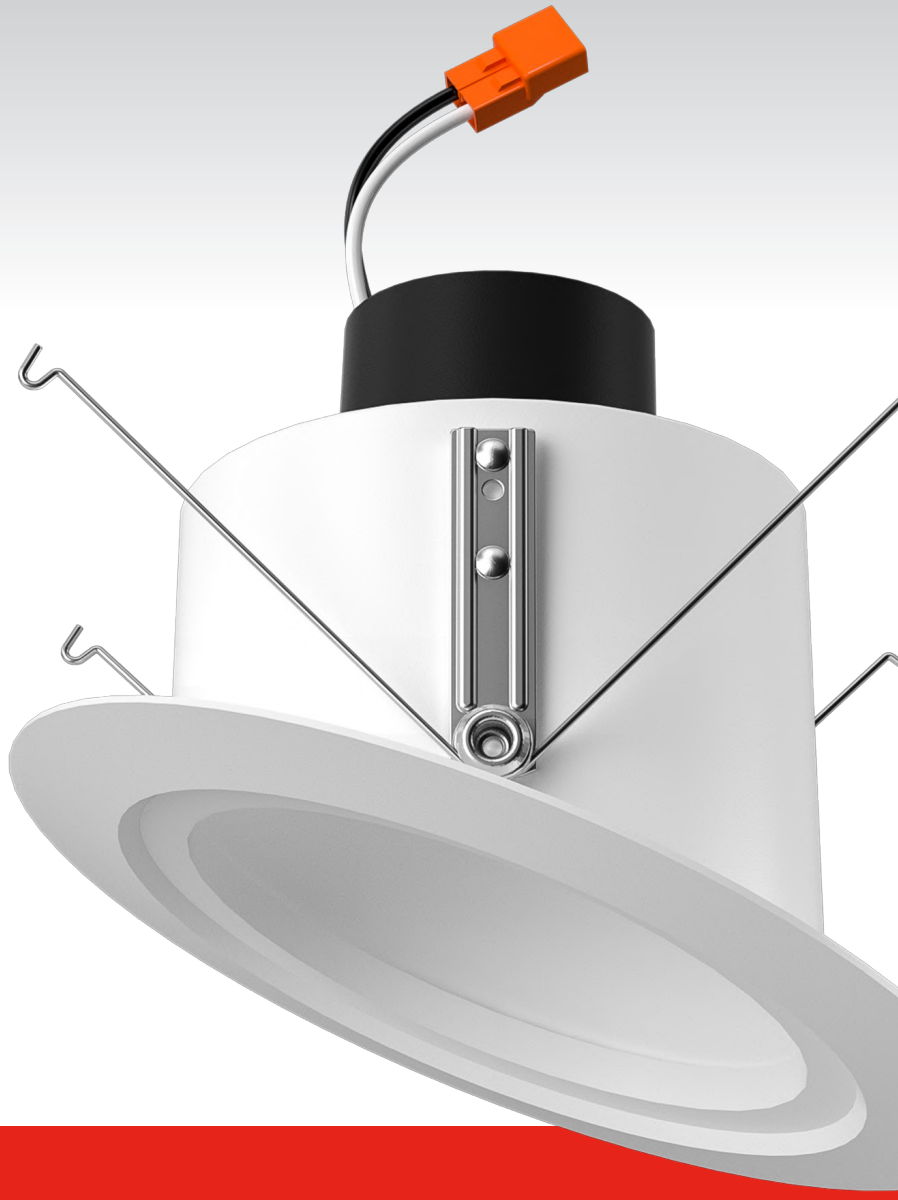

4″ Dedicated LED Sloped Ceiling IC Housings & LED Inserts	193
5″ & 6″ Dedicated LED Sloped Ceiling IC Housings & LED Inserts	195
6″ Dedicated LED Super Sloped Ceiling IC Housings & LED Inserts	196
5″ Line Voltage Sloped Ceiling IC Housings & Trims	197
6″ Line Voltage Sloped Ceiling IC Housings & Trims	198
6″ Line Voltage Super Sloped Ceiling IC & Non-IC Housings & Trims	199

The Slant™ **System**

Sloped Ceiling Dedicated LED Lighting



93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

4" Dedicated LED Sloped Ceiling IC Housings & Inserts

	Description			CAT. #	Specs
	4" LED IC Airtight Sloped Ceiling Single Wall New Construction Housing 6 ⅝" Height			EL470ICA	14W, 120V
	4" LED IC Airtight Sloped Ceiling Remodel Housing 7 ½" Height			EL470RICA	14W, 120V
	4" Sloped Ceiling LED Baffle Insert with 5-CCT Switch 6 1⁄16" O.D. - 3 ⅝" I.D. - 4 ⅛" H	CCT SWITCH	DAMP LOCATION	EL423CT5W	White, 12W, 900 lm, 2700K - 5000K
				EL423CT5BZ	Bronze, 12W, 900 lm, 2700K - 5000K
	4" Sloped Ceiling LED Reflector Insert with 5-CCT Switch 6 1⁄16" O.D. - 3 ⅝" I.D. - 4 ⅛" H	CCT SWITCH	DAMP LOCATION	EL425CT5W	12W, 900 lm, 2700K - 5000K

Standard Koto™ LED Modules

Description	CAT. #	Specs
	ELK0327	5W, 350 lm, 2700K, 120V
	ELK0330	5W, 350 lm, 3000K, 120V
	ELK0724	10.5W, 730 lm, 2400K, 120V
	ELK0727	10.5W, 770 lm, 2700K, 120V
	ELK0730	10.5W, 800 lm, 3000K, 120V
	ELK0735	10.5W, 830 lm, 3500K, 120V
	ELK0740	10.5W, 860 lm, 4000K, 120V
	ELK0924	10.5W, 900 lm, 2400K, 120V
	ELK0927	10.5W, 940 lm, 2700K, 120V
	ELK0930	10.5W, 990 lm, 3000K, 120V
	ELK0935	10.5W, 1040 lm, 3500K, 120V
	ELK0940	10.5W, 1100 lm, 4000K, 120V
	ELK09SD	10.5W, 940 lm, Sunset, 120V
	ELK1124	12.5W, 1060 lm, 2400K, 120V
	ELK1127	12.5W, 1100 lm, 2700K, 120V
	ELK1130	12.5W, 1150 lm, 3000K, 120V
	ELK1135	12.5W, 1200 lm, 3500K, 120V
	ELK1140	12.5W, 1260 lm, 4000K, 120V
	ELK11HC	12.5W, 1050 lm, Human Centric, 120V
	ELK11SD	12.5W, 1050 lm, Sunset, 120V



Koto™ LED Module

1 ½ " Aperture - 2 ⅞" H

Standard 38° Lens Installed, with field changeable 25° & 60° lenses included
Optional Lenses: 18° (EP731C), 90° (EP739C)

Optional: White Louver (L45)
Black Louver (L57)
Linear Lens (L46)
Spread Lens (L47)
Frosted Diffuser (L49)
Single Asymmetric Lens (L54)
Double Asymmetric Lens (L55)
Color Shifter (L51)

TWIST-ON

The Slant™ **System**

Sloped Ceiling Dedicated LED Lighting

93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

Standard Koto™ LED Modules

	Description	CAT. #	Specs
	Koto™ LED Module 1 ½ " Aperture - 2 ⅞" H Standard 38° Lens Installed, with field changeable 25° & 60° lenses included TWIST-ON	ELK1327	12.5W, 1250 lm, 2700K, 120V
		ELK1330	12.5W, 1300 lm, 3000K, 120V
		ELK1335	12.5W, 1350 lm, 3500K, 120V
		ELK1340	12.5W, 1400 lm, 4000K, 120V
	10° Koto™ LED Module **(Narrow Spot)** Includes 38° lens installed, and field changeable 10° & 25° lens included.	ELK0327-NSP	5W, 350 lm, 2700K, 120V
		ELK0330-NSP	5W, 350 lm, 3000K, 120V
	10° Koto™ LED Module **(Narrow Spot)** Includes 10° lens installed, and field changeable 25° & 38° lens included.	ELK0827-NSP	10.5W, 850 lm, 2700K, 120V
		ELK0830-NSP	10.5W, 850 lm, 3000K, 120V
	Koto™ **5-CCT** LED Module CCT SWITCH Switch to desire Color Temperature: 2700K, 3000K, 3500K, 4000K, 5000K	ELK08CT5	10.5W, 825 lm, 120V, 2700K - 5000K
		ELK10CT5	12.5W, 1000 lm, 120V, 2700K - 5000K
	Koto™ **FOCUS** LED Module 18° - 50° Adjustable Focus with a simple twist of the lens. TWIST-ON Includes white snoot installed on module and field changeable black snoot.	ELK0727-FC	10.5W, 770 lm, 2700K, 120V
		ELK0730-FC	10.5W, 800 lm, 3000K, 120V
		ELK0735-FC	10.5W, 830 lm, 3500K, 120V
		ELK0740-FC	10.5W, 860 lm, 4000K, 120V
		ELK07SD-FC	10.5W, 720 lm, Sunset, 120V

NEW! **4" Universal** Sloped Ceiling Trims

	Description	CAT. #	Specs
	Universal Sloped Ceiling Reflector Trim 5" O.D. - 3 ⅝" I.D.	ELK4357W	All White
		ELK4357BB	All Black
		ELK4357BZ	All Bronze
		ELK4357B	Black / White Ring
		ELK4357H	Haze / White Ring
	Universal Sloped Ceiling Reflector Trim with Clear Glass 5" O.D. - 3 ⅝" I.D.	ELK4347W	All White
		ELK4347BB	All Black
		ELK4347BZ	All Bronze
		ELK4347B	Black / White Ring
		ELK4347H	Haze / White Ring
	Universal Sloped Ceiling Reflector Trim with Frosted Glass 5" O.D. - 3 ⅝" I.D.	ELK4349W	All White
		ELK4349BB	All Black
		ELK4349BZ	All Bronze
		ELK4349B	Black / White Ring
		ELK4349H	Haze / White Ring

The Slant™ **System**

Sloped Ceiling Dedicated LED Lighting

93+ CRI | IC RATED | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

5″ Dedicated LED Sloped Ceiling IC Housings & Inserts

	Description	CAT. #	Specs
	5″ LED IC Airtight Sloped Ceiling Single Wall New Construction Housing 6 ¾″ Height	EL590ICA	24W, 120V
	5″ LED IC Airtight Sloped Ceiling Remodel Housing 6 ½″ Height	EL590RICA	24W, 120V
	5″ Sloped Ceiling LED Baffle Insert 7 5⁄16″ O.D. - 4 5⁄8″ I.D. - 4 3⁄8″ H CCT SWITCH · DAMP LOCATION	EL511CT5W	All White, 15W, 1050 lm, 2700K - 5000K
		EL511CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
		EL511CT5BZ	All Bronze, 15W, 1050 lm, 2700K - 5000K
	5″ Sloped Ceiling LED Reflector Insert 7 5⁄16″ O.D. - 4 5⁄8″ I.D. - 4 3⁄8″ H CCT SWITCH · DAMP LOCATION	EL512CT5W	All White, 15W, 1050 lm, 2700K - 5000K
		EL512CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
		EL512CT5C	Clear/White Ring, 15W, 1050 lm, 2700K - 5000K

6″ Dedicated LED Sloped Ceiling IC Housings & Inserts

	Description	CAT. #	Specs
	6″ LED IC Airtight Sloped Ceiling Single Wall New Construction Housing 7″ Height	EL970ICA	24W, 120V
	6″ LED IC Airtight Sloped Ceiling Remodel Housing 7″ Height	EL970RICA	24W, 120V
	6″ Sloped Ceiling LED Baffle Insert with 5-CCT Switch 7 7⁄8″ O.D. - 7 5⁄8″ I.D. - 5 7⁄8″ H * Includes PSA30 adapter and PSE26 socket CCT SWITCH · DAMP LOCATION	EL713CT5W*	All White, 15W, 1050 lm, 2700K - 5000K
		EL713CT5B*	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
		EL713CT5BZ*	All Bronze, 15W, 1050 lm, 2700K - 5000K
		EL714CT5W	All White, 18W, 1200 lm, 2700K - 5000K
		EL714CT5B	Black/White Ring, 18W, 1200 lm, 2700K - 5000K
		EL714CT5BZ	All Bronze, 18W, 1200 lm, 2700K - 5000K
	6″ Sloped Ceiling LED Reflector Insert with 5-CCT Switch 7 7⁄8″ O.D. - 7 5⁄8″ I.D. - 5 7⁄8″ H CCT SWITCH · DAMP LOCATION	EL715CT5W	All White, 15W, 1050 lm, 2700K - 5000K
		EL715CT5BB	All Black, 15W, 1050 lm, 2700K - 5000K
		EL715CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
		EL716CT5W	All White, 18W, 1200 lm, 2700K - 5000K
		EL716CT5B	Black/White Ring, 18W, 1200 lm, 2700K - 5000K

Sloped Ceilings Pitch Range

10°	14°	18.5°	22.5°	26.5°
2/12	3/12	4/12	5/12	6/12

The Slant™ **System**


Sloped Ceiling Dedicated LED Lighting

93+ CRI | IC RATED | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

6" Dedicated LED Super Sloped Ceiling IC Housings & Inserts

	Description	CAT. #	Specs
	6" LED IC Airtight Super Sloped Ceiling Single Wall New Construction Housing 7 ¼" Height	EL971ICA	24W, 120V
	6" LED IC Airtight Super Sloped Ceiling Remodel Housing 6 ⅛" Height	EL971RICA	24W, 120V
	6" Super Sloped Ceiling LED Baffle Insert with 5-CCT Switch 8 ⅛" O.D. - 7 ¼" I.D. - 5 ⅞" H CCT SWITCH · DAMP LOCATION	EL763CT5W	All White, 15W, 1050 lm, 2700K - 5000K
		EL763CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
		EL763CT5BZ	All Bronze, 15W, 1050 lm, 2700K - 5000K
		EL764CT5W	All White, 18W, 1200 lm, 2700K - 5000K
		EL764CT5B	Black/White Ring, 18W, 1200 lm, 2700K - 5000K
		EL764CT5BZ	All Bronze, 18W, 1200 lm, 2700K - 5000K
	6" Super Sloped Ceiling LED Reflector Insert with 5-CCT Switch 8 ⅛" O.D. - 7 ¼" I.D. - 5 ⅞" H CCT SWITCH · DAMP LOCATION	EL761CT5W	All White, 15W, 1050 lm, 2700K - 5000K
		EL761CT5BB	All Black, 15W, 1050 lm, 2700K - 5000K
		EL761CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
		EL762CT5W	All White, 18W, 1200 lm, 2700K - 5000K
		EL762CT5BB	All Black, 18W, 1200 lm, 2700K - 5000K
		EL762CT5B	Black/White Ring, 18W, 1200 lm, 2700K - 5000K

Super Sloped Ceilings Pitch Range:

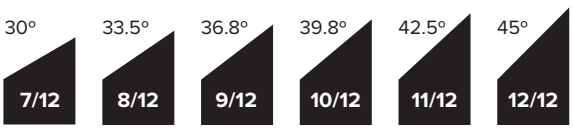

Line Voltage **Sloped Ceiling**

Sloped Housings & Trims

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

5" Line Voltage Sloped Ceiling IC Housings

	Description	CAT. #	Specs
	5" Airtight Slope IC New Construction Housing (Pitch ranging from 2/12 to 6/12 with trim) 6 ½" Height	EL518ICA	75W MAX. 120V
	5" Airtight Slope IC Remodel Housing (Pitch ranging from 2/12 to 6/12 with trim) 6 ½" Height	EL518RICA	75W MAX. 120V

5" Line Voltage Sloped Trims

	Description	CAT. #	Specs
	5" Sloped Baffle Trim 7 ½" O.D.	EL550W	All White, Lamp: 75W PAR30
		EL550B	Black/White Ring
	5" Sloped Reflector Trim 7 ½" O.D.	EL555W	All White, Lamp: 75W PAR30
		EL555B	All Black
		EL555C	Clear/White Ring
	5" Sloped Baffle with Adjustable Gimbal Ring 7 ¼" O.D.	EL560W	All White, Lamp: 75W PAR30
		EL560B	Black/White Ring
	5" Sloped Reflector with Adjustable Gimbal Ring 7 ¼" O.D.	EL561W	All White, Lamp: 75W PAR30
		EL561C	All Clear

Line Voltage **Sloped Ceiling**

Sloped Housings & Trims

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE

6" Line Voltage Sloped Ceiling IC Housings

	Description	CAT. #	Specs
	6" Sloped Ceiling Medium Base IC Airtight Double Wall New Construction Housing 7 ½" Height	EL936ICA	90W MAX. 120V
	6" Sloped Ceiling Medium Base IC Airtight Single Wall New Construction Housing 7" Height	EL918ICA	75W MAX. 120V
	6" Sloped Ceiling Medium Base IC Airtight Remodel Housing 7 ⅛" Height	EL918RICA	75W MAX. 120V

6" Line Voltage Sloped Trims

	Description	CAT. #	Specs
	6" Shower Trim with Albalite Lens 8" O.D.	EL12W	All White, Lamp: 60W A19
		EL12B	All Black
		EL12BZ	All Bronze
	6" Shower Trim with Fresnel Lens 8" O.D.	EL13W	All White, Lamp: 60W A19
		EL13B	All Black
	6" Adjustable Sloped Baffle with Reflector Trim 8" O.D.	EL601W	All White, Lamp: 75W PAR30
		EL601B	Black/White Ring
	6" Sloped Baffle Trim With PAR30 Gimbal Ring 8" O.D.	EL614W	All White, Lamp: 75W PAR30
		EL614B	Black
		EL614C	Clear/White Ring
	6" Sloped Baffle Trim With PAR38 Gimbal Ring 7 ⅝" O.D.	EL615W	All White, Lamp: 150W PAR38
		EL615B	Black
		EL615C	Clear/White Ring
	6" Sloped Reflector Trim 7 ⅝" O.D.	EL616W	All White Lamp: 75W PAR30, 150W PAR38
	6" Sloped Baffle Trim With Coil Springs and Metal Trim Ring 7 ⅝" O.D.	EL622W	All White, Lamp: 150W PAR38
		EL622B	Black/White Ring

Line Voltage **Sloped Ceiling**


Sloped Housings & Trims

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE


6" Line Voltage Sloped Trims

	Description	CAT. #	Specs
	6" Adjustable Sloped Baffle Trim with Bracket 7 ⅞" O.D.	EL622KW	All White, Lamp: 75W PAR30, 150W PAR38
		EL622KB	Black/White Ring
		EL622KBB	All Black
		EL622KBZ	All Bronze
	6" Sloped Reflector with Coil Springs Trim 7 ⅞" O.D.	EL617W	All White, Lamp: 42W 4-Pin CFL, 150W PAR38
	6" Sloped Baffle with Coil Springs Trim 7 ⅞" O.D.	EL623W	All White, Lamp: 42W 4-Pin CFL, 150W PAR38
	6" Adjustable Sloped Baffle with Gimbal Trim 7 ⅞" O.D.	EL624W	All White Lamp: 75W PAR30 or LED
	6" Adjustable Sloped Baffle with Gimbal Trim 7 ⅜" O.D.	EL626W	All White, Lamp: 150W PAR38 or LED
		EL626B	Black/White Ring

6" Line Voltage Super Sloped Ceiling IC Housings

	Description	CAT. #	Specs
	6" Super Sloped IC Airtight Medium Base Double Wall New Construction Housing 7 ¾" Height	EL946ICA	90W MAX. 120V
	6" Super Sloped Ceiling Medium Base IC Airtight Single Wall New Construction Housing 7 ½" Height	EL901ICA	75W MAX. 120V
	6" Super Sloped Ceiling Medium Base IC Airtight Remodel Housing 5 ¾" Height	EL901RICA	75W MAX. 120V

Super Sloped Ceilings Pitch Range:

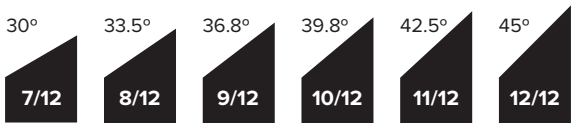

Line Voltage **Sloped Ceiling**

Sloped Housings & Trims

IC RATED | IN TODAY OUT TODAY | TITLE 24 COMPLIANT | DIMMABLE


6" Line Voltage Super Sloped Ceiling Non-IC Housings

	Description	CAT. #	Specs
	6" Super Sloped Ceiling Medium Base Non-IC Single Wall New Construction Housing 7 ½" Height	EL901HT	90W MAX. 120V
	6" Super Sloped Ceiling Medium Base Non-IC Remodel Housing 7 ½" Height	EL901RT	90W MAX. 120V

6" Line Voltage Super Sloped Trims

	Description	CAT. #	Specs
	6" Super Sloped Baffle Trim 9 ⅜" O.D.	EL602W	All White Lamp: 90W PAR30/PAR38 or 75W BR30
	6" Super Sloped Reflector Trim 9 ⅜" O.D.	EL606W	All White, Lamp: 90W PAR30/PAR38 or 75W BR30
	6" Super Sloped Baffle Trim with PAR30 Gimbal 9 ⅜" O.D.	EL603W	All White Lamp: 75W PAR30
	6" Super Sloped Reflector Trim with PAR30 Gimbal 9 ⅜" O.D.	EL604W	All White Lamp: 75W PAR30
	6" Super Sloped Baffle Trim with PAR38 Gimbal 9 ⅜" O.D.	EL607W	All White Lamp: 90W PAR38
	6" Super Sloped Reflector Trim with PAR38 Gimbal 9 ⅜" O.D.	EL608W	All White Lamp: 90W PAR38

Super Sloped Ceilings Pitch Range:

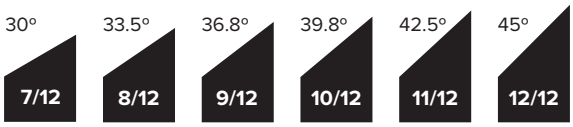

The **Sylo™** Collection



Koto Sylo™ Monopoint	203
Koto Sylo™ Track	207
Koto Sylo™ Wall Mount	209
Koto Sylo™ Wall Mount Downlight	211
Koto Sylo™ Surface Mount	212
Koto Sylo™ Pendant	220
Koto Sylo™ Direct Mount	228
Ply Sylo™ Surface Mount	233
Ply Sylo™ Pendant	234

The **Koto™ Sylo**

Fixtures with Koto™ Modules

FOR STANDARD, FOCUS, DALI-2 DT8, 0-10V and LOW VOLTAGE KOTO™ MODULES

Available in a wide selection of applications

Surface Mount



Wall Mount



Track Heads



Monopoint



Direct Mount



Pendant





Standard Koto™ Module



Focus Koto™ Module



DX 0-10V Koto™ Module



DALI-2 DT8 Koto™ Module



12V AC Low Voltage Koto™ Modules



24V DC Koto™ Modules




Covered by U.S. PATENTS and Patents Pending







SIZES

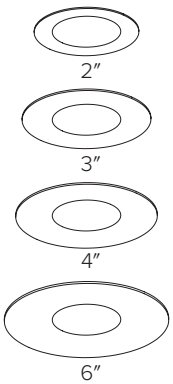


STYLES




Surface Mount




Monopoint




Wall Mount



Track Head



Pendant



Direct Mount

FINISHES


White

Black

Bronze

Silver

LUMENS



350 lm to 3500 lm

COLOR TEMPERATURE



2400K - 5000K, Sunset, Human Centric, Tunable White, Amber and CT5

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | DAMP LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE



2″ Monopoint Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- **Sunset** option dims from 3000K to 1800K. **Human Centric** option dims from 4000K to 2200K
- 90° tilt, 358° rotation
- Energy Star Compliant. Title 24 JA8-2025 Compliant



Standard Koto Sylo™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E25M 2″ Monopoint	**W** All White **B** All Black **S** All Silver	**-03**[1] 350 lm (5W) **-07** 750 lm (10.5W) **-09** 950 lm (10.5W) **-11** 1150 lm (12.5W) **-13** 1350 lm (12.5W)	**(Blank)** 120V, Triac/ELV	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[2,3] Sunset **HC**[4,5] Human Centric	**(Blank)**[6] 38° **-S** 18° **-N** 25° **-W** 60° **-T**[7] 10° **-E**[8] 90°	**(Blank)** Standard **-12**[9] 12″ Stem **-24**[9] 24″ Stem **-36**[9] 36″ Stem **-48**[9] 48″ Stem **-60**[9] 60″ Stem **-72**[9] 72″ Stem **-84**[9] 84″ Stem
		-08 825 lm (10.5) **-10** 1000 lm (12.5)	**(Blank)** 120V, Triac/ELV	**CT5** 2700K - 5000K		

Example: **E25MW-0735** [2″ Koto™ Sylo Monopoint, All White, 750 lumens, 3500K]

[1] Available in 2400K, 2700K & 3000K Color Temperature only
[2] Available in -09 & -11 lumen outputs only
[3] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[4] Available with 1150 lumen (-11) output only
[5] Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[6] Includes 25° and 60° lens in the box
[7] Available with 350 (-03) & 750 lumen (-07), 2700K & 3000K options only
[8] 90° Frosted Reflector
[9] Stem is not field cuttable



0-10V/Triac/ELV Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E25M 2″ Monopoint	**W** All White **B** All Black **S** All Silver	**-10** 1000 lm (11.8W)	**DX** 120-277V, 0-10V/ Triac/ELV Dims to 1%	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1] Sunset	**(Blank)**[2] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[3] 90°	**(Blank)** Standard **-12**[4] 12″ Stem **-24**[4] 24″ Stem **-36**[4] 36″ Stem **-48**[4] 48″ Stem **-60**[4] 60″ Stem **-72**[4] 72″ Stem **-84**[4] 84″ Stem

Example: **E25MW-1027** [2″ 0-10V/Triac/ELV Koto™ Sylo Monopoint, All White, 1000 lumens, 2700K]


[1] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[2] Includes 25° and 60° lens in the box
[3] 90° Frosted Reflector
[4] Stem is not field cuttable

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI · DAMP LOCATION · IN TODAY OUT TODAY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE



2″ Monopoint Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K Tunable White option with range of 4000K to 1800K.
- 90° tilt, 358° rotation
- Energy Star Compliant. Title 24 JA8-2025 Compliant



Koto™ Focus Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E25M 2″ Monopoint	**W** All White **B** All Black **S** All Silver	**-07** 750 lm (10.5W)	**(Blank)** 120V, Triac/ELV	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1] Sunset	**-FC**[2] 18°-50°	**(Blank)** Standard **-12**[3] 12″ Stem **-24**[3] 24″ Stem **-36**[3] 36″ Stem **-48**[3] 48″ Stem **-60**[3] 60″ Stem **-72**[3] 72″ Stem **-84**[3] 84″ Stem

Example: **E25MW-0735-FC** [2″ Koto™ Focus Sylo Monopoint, All White, 750 lumens, 3500K, 18°-50° beam angle]

[1] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

[2] **Adjustable Focus** offers 18°-50° with a twist of the snoot. Koto™ Focus LED Module includes white snoot installed on module and field changeable black snoot. Not compatible with lens accessories

[3] Stem is not field cuttable



DALI-2 DT8 Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E25M 2″ Monopoint	**W** All White **B** All Black **S** All Silver	**-08** 880 lm (11.5W)	**A** 120-277V, DALI-2 DT8, Dims to 0.1%	**4T** Tunable White 4000K-1800K	**(Blank)**[1] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[2] 90°	**(Blank)** Standard **-12**[3] 12″ Stem **-24**[3] 24″ Stem **-36**[3] 36″ Stem **-48**[3] 48″ Stem **-60**[3] 60″ Stem **-72**[3] 72″ Stem **-84**[3] 84″ Stem

Example: **E25MW-08A4T** [2″ Dali 2 Koto™ Sylo Monopoint, All White, 880 lumens, Tunable White 4000K-1800K,]

[1] Includes 25° and 60° lens in the box [2] 90° Frosted Reflector [3] Stem is not field cuttable



Low Voltage Koto™ Module Product Number Builder (transformer sold separately)

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E25M 2″ Monopoint	**W** All White **B** All Black **S** All Silver	**-08** 800 lm (10W)	**12A** 12V AC **24D** 24V DC	**27** 2700K **30** 3000K **SD**[1] Sunset	**(Blank)**[2] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[3] 90°	**(Blank)** Standard **-12**[4] 12″ Stem **-24**[4] 24″ Stem **-36**[4] 36″ Stem **-48**[4] 48″ Stem **-60**[4] 60″ Stem **-72**[4] 72″ Stem **-84**[4] 84″ Stem

Example: **E25MW-0812A27** [2″ Low Voltage Koto™ Sylo Monopoint, All White, 800 lumens, 12V AC, 2700K,]

[1] Available in 12A (12V AC) voltage only. Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed [2] Includes 25° and 60° lens in the box [3] 90° Frosted Reflector [4] Stem is not field cuttable

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | DAMP LOCATION | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE



3″ Monopoint Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K Tunable White option with range of 4000K to 1800K.
- 90° tilt, 358° rotation
- Energy Star Compliant. Title 24 JA8-2025 Compliant



Standard Koto Sylo™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E36M 3″ Monopoint	**W** All White **B** All Black **S** All Silver	**-03**[1,2] 350 lm (5W) **-07** 750 lm (10.5W) **-09** 950 lm (10.5W) **-11** 1150 lm (12.5W) **-13** 1350 lm (12.5W) **-15** 1500 lm (14.7W) **-18** 1800 lm (18.9W) **-08**[1] 825 lm (10.5W) **-10**[1] 1000 lm (12.5W)	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[3,4] Sunset **HC**[1,5,6] Human Centric **AMD**[7,8] Amber **CT5**[1,9] 2700K-5000K	**(Blank)** 120V Triac/ELV **D** 120-277V, 0-10V/Triac/ELV, Dims to 1%	**(Blank)**[10] 38° **-S** 18° **-N** 25° **-W** 60° **-T**[1,11] 10° **-E**[12] 90°	**(Blank)** Standard **-12**[13] 12″ Stem **-24**[13] 24″ Stem **-36**[13] 36″ Stem **-48**[13] 48″ Stem **-60**[13] 60″ Stem **-72**[13] 72″ Stem **-84**[13] 84″ Stem

Example: **E36MB-0940D-12** [3″ Koto™ Sylo Monopoint, All Black, 950 lumens, 4000K, 120-277V, 0-10V/Triac/ELV Dims to 1%, 38° Beam Angle,12″ Stem]

[1] Available as 120V, Triac/ELV only
[2] Available in 2400K, 2700K & 3000K color temperature only
[3] Available in -09, -11, -13, & -15 lumen outputs
[4] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[5] Available with 1150 lumen (-11) output only
[6] Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[7] Turtle friendly
[8] Available with -03, -07, -09 and -11 lumen outputs only
[9] Available with -08 and -10 lumen outputs only
[10] Includes 25° and 60° lens in the box
[11] Available with 350 and 750 lumen, 2700K and 3000K options only
[12] 90° Frosted Reflector
[13] Stem is not field cuttable



DALI-2 DT8 Koto Sylo™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E36M 3″ Monopoint	**W** All White **B** All Black **S** All Silver	**-08** 880 lm (11.5W)	**4T** Tunable White 4000K-1800K	**A** 120-277V, DALI-2 DT8, Dims to 0.1%	**(Blank)**[1] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[2] 90°	**(Blank)** Standard **-12**[3] 12″ Stem **-24**[3] 24″ Stem **-36**[3] 36″ Stem **-48**[3] 48″ Stem **-60**[3] 60″ Stem **-72**[3] 72″ Stem **-84**[3] 84″ Stem

Example: **E36MB-084TA** [3″ Dali 2 Koto™ Sylo Monopoint, All Black, 880 lumens, Tunable White 4000K-1800K, Dali 2, 120-277V, Dims to 0.1%, 38° Beam Angle]


[1] Includes 25° and 60° lens in the box [2] 90° Frosted Reflector [3] Stem is not field cuttable

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | DAMP LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE



3″ Monopoint Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- **Sunset** option dims from 3000K to 1800K.
- 90° tilt, 358° rotation
- Energy Star Compliant. Title 24 JA8-2025 Compliant



Koto™ Focus Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E36M 3″ Monopoint	**W** All White **B** All Black **S** All Silver	**-07** 750 lm (10.5W) **-09** 950 lm (12.5W) **-12** 1250 lm (16.8W)	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1,2] Sunset	**(Blank)** 120 Triac/ELV **D** 120-277V, 0-10V/Triac/ELV, Dims to 1%	**-FC**[3] 18° - 50°	**(Blank)** Standard **-12**[4] 12″ Stem **-24**[4] 24″ Stem **-36**[4] 36″ Stem **-48**[4] 48″ Stem **-60**[4] 60″ Stem **-72**[4] 72″ Stem **-84**[4] 84″ Stem

Example: **E36MB-0940D-FC** [3″ Koto™ Focus Sylo Monopoint, All Black, 950 lumens, 4000K, 120-277V, 0-10V/Triac/ELV, Dims to 1%, 18°-50° Beam Angle]

[1] Available as 750 lumen (-07) output, 120V, Triac/ELV only
[2] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

[3] **Adjustable Focus** offers 18°-50° with a twist of the snoot. Koto™ Focus LED Module includes white snoot installed on module and field changeable black snoot. Not compatible with lens accessories.

[4] Stem is not field cuttable



Low Voltage Koto™ Module Product Number Builder (transformer sold separately)

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E36M 3″ Monopoint	**W** All White **B** All Black **S** All Silver	**-08** 800 lm (9W-10W)	**12A** 12V AC **24D** 24V DC	**27** 2700K **30** 3000K **SD**[1,2] Sunset	**(Blank)**[3] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[4] 90°	**(Blank)** Standard **-12**[5] 12″ Stem **-24**[5] 24″ Stem **-36**[5] 36″ Stem **-48**[5] 48″ Stem **-60**[5] 60″ Stem **-72**[5] 72″ Stem **-84**[5] 84″ Stem

Example: **E36MW-0812A27-W-12** [3″ Low Voltage Koto™ Sylo Monopoint, All White, 800 lumens, 12V AC, 2700K, 60° Beam Angle, 12″ Stem]

[1] Available in 12A (12V AC) voltage only
[2] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

[3] Includes 25° and 60° lens in the box
[4] 90° Frosted Reflector
[5] Stem is not field cuttable

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | DAMP LOCATION | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

2″ Track Head Koto™ Sylo



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Works with Single and Two Circuit Track
- **Sunset** option dims from 3000K to 1800K. **Human Centric** option dims from 4000K to 2200K
- 90° tilt, 358° rotation
- Compatible with H-Style track
- Energy Star Compliant. Title 24 JA8-2025 Compliant



Standard Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E25T	**W** All White	**-03**[1] 350 lm (5W)	**(Blank)** 120V, Triac/ELV	**24** 2400K	**(Blank)**[6] 38°	**(Blank)** Standard
2″	**B** All Black	**-07** 750 lm (10.5W)		**27** 2700K	**-S** 18°	**-12**[9] 12″ Stem
Track Head	**S** All Silver	**-09** 950 lm (10.5W)		**30** 3000K	**-N** 25°	**-24**[9] 24″ Stem
	BB All Bronze	**-11** 1150 lm (12.5W)		**35** 3500K	**-W** 60°	**-36**[9] 36″ Stem
		-13 1350 lm (12.5W)		**40** 4000K	**-T**[7] 10°	**-48**[9] 48″ Stem
				SD[2,3] Sunset	**-E**[8] 90°	**-60**[9] 60″ Stem
				HC[4,5] Human Centric		**-72**[9] 72″ Stem
		-08 825 lm (10.5W)	**(Blank)** 120V, Triac/ELV	**CT5** 2700K - 5000K		**-84**[9] 84″ Stem
		-10 1000 lm (12.5W)				

Example: **E25TW-0327-12** [2″ Koto™ Sylo Track Head, All White, 350 lumens, 120V, Triac/ELV, 2700K, 38° lens, 12″ stem]

[1] Available in 2400K, 2700K & 3000K Color Temperature only
[2] Available in -09 & -11 lumen outputs only
[3] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[4] Available with 1150 lumen (-11) output only
[5] Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[6] Includes 25° and 60° lens in the box
[7] Available with 350 (-03) & 750 lumen (-07), 2700K & 3000K options only
[8] 90° Frosted Reflector
[9] Stem is not field cuttable



Koto™ Focus Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E25T	**W** All White	**-07** 750 lm (10.5W)	**(Blank)** 120V, Triac/ELV	**27** 2700K	**-FC**[2] 18° - 50°	**(Blank)** Standard
2″	**B** All Black			**30** 3000K		**-12**[3] 12″ Stem
Track Head	**S** All Silver			**35** 3500K		**-24**[3] 24″ Stem
	BB All Bronze			**40** 4000K		**-36**[3] 36″ Stem
				SD[1] Sunset		**-48**[3] 48″ Stem
						-60[3] 60″ Stem
						-72[3] 72″ Stem
						-84[3] 84″ Stem

Example: **E25TW-0735-FC** [2″ Koto™ Focus Sylo Track Head, All White, 750 lumens, 120V, Triac/ELV, 3500K, 18°-50° beam angle]

[1] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[2] **Adjustable Focus** offers 18°-50° with a twist of the snoot. Koto™ Focus LED Module includes white snoot installed on module and field changeable black snoot. Not compatible with lens accessories.
[3] Stem is not field cuttable

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | DAMP LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

3″ Track Head Koto™ Sylo



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Works with Single and Two Circuit Track
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- 90° tilt, 358° rotation
- Compatible with H-Style track
- Energy Star Compliant. Title 24 JA8-2025 Compliant



Standard Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E36T	**W** All White	**-03**[1,2] 350 lm (5W)	**24** 2400K	**(Blank)** 120V Triac/ELV	**(Blank)**[10] 38°	**(Blank)** Standard
3″	**B** All Black	**-07** 750 lm (10.5W)	**27** 2700K		**-S** 18°	**-12**[13] 12″ Stem
Track Head	**S** All Silver	**-09** 950 lm (10.5W)	**30** 3000K		**-N** 25°	**-24**[13] 24″ Stem
		-11 1150 lm (12.5W)	**35** 3500K		**-W** 60°	**-36**[13] 36″ Stem
		-13 1350 lm (12.5W)	**40** 4000K		**-T**[1,11] 10°	**-48**[13] 48″ Stem
		-15 1500 lm (14.7W)	**SD**[3,4] Sunset		**-E**[12] 90°	**-60**[13] 60″ Stem
		-18 1800 lm (18.9W)	**HC**[1,5,6] Human Centric			**-72**[13] 72″ Stem
			AMD[7,8] Amber			**-84**[13] 84″ Stem
		-08[1] 825 lm (10.5W)	**CT5**[1,9] 2700K-5000K			
		-10[1] 1000 lm (12.5W)				

Example: **E36TW-0327-12** [3″ Koto™ Sylo Track Head, All White, 350 lumens, 2700K, 120V, Triac/ELV, 38° Beam Angle, 12″ stem]

[1] Available as 120V, Triac/ELV only
[2] Available in 2400K, 2700K & 3000K color temperature only
[3] Available in -09, -11, -13, & -15 lumen outputs
[4] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[5] Available with 1150 lumen (-11) output only
[6] Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[7] Turtle friendly
[8] Available with -03, -07, -09 and -11 lumen outputs only
[9] Available with -08 and -10 lumen outputs only
[10] Includes 25° and 60° lens in the box
[11] Available with 350 and 750 lumen, 2700K and 3000K options only
[12] 90° Frosted Reflector
[13] Stem is not field cuttable



Koto™ Focus Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E36T	**W** All White	**-07** 750 lm (10.5W)	**27** 2700K	**(Blank)** 120V Triac/ELV	**-FC**[3] 18° - 50°	**(Blank)** Standard
3″	**B** All Black	**-09** 950 lm (12.5W)	**30** 3000K			**-12**[4] 12″ Stem
Track Head	**S** All Silver	**-12** 1250 lm (16.8W)	**35** 3500K			**-24**[4] 24″ Stem
			40 4000K			**-36**[4] 36″ Stem
			SD[1,2] Sunset			**-48**[4] 48″ Stem
						-60[4] 60″ Stem
						-72[4] 72″ Stem
						-84[4] 84″ Stem

Example: **E36TW-0735-FC** [3″ Koto™ Focus Sylo Track Head, All White, 750 lumens, 3500K, 120V, Triac/ELV, 18°-50° Beam Angle]

[1] Available as 750 lumen (-07) output, 120V, Triac/ELV only
[2] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[3] **Adjustable Focus** offers 18°-50° with a twist of the snoot. Koto™ Focus LED Module includes white snoot installed on module and field changeable black snoot. Not compatible with lens accessories.
[4] Stem is not field cuttable

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com


The **Koto™ Sylo** System

2" Aperture Fixtures with Twist-On System



95+ CRI | WET LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

NEW!



2", 3" & 4" Wall Mount Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- **Optional UP/DOWN lighting**
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Compatible with: 3 ½" and 4" Octagon and Round Junction Boxes, and 3 ¾" Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K Tunable White option with range of 4000K to 1800K.
- Title 24 JA8-2025 Compliant



2" Standard Koto™ Module Product Number Builder

Style	Finish	Module(Down)	Beam Angle	Module(Up)	Beam Angle	Color Temperature	Dimming
E25A 2" Wall Mount	**W** White **B** Black **BZ** Bronze	**(Blank)** No Module **03**[1,2] 350 lm (5W) **07** 750 lm (10.5W) **08**[1,3] 825 lm (10.5W) **08A**[4] 880 lm (11.5W) **09** 950 lm (10.5W) **10**[1,3] 1000 lm (12.5W) **11** 1150 lm (12.5W) **13** 1350 lm (12.5W)	**(Blank)**[5] 38° **S** 18° **N** 25° **W** 60° **T**[1,6] 10° **E**[7] 90°	**(Blank)** No Module **-03**[1,2] 350 lm (5W) **-07** 750 lm (10.5W) **-08**[1,3] 825 lm (10.5W) **-08A**[4] 880 lm (11.5W) **-09** 950 lm (10.5W) **-10**[1,3] 1000 lm (12.5W) **-11** 1150 lm (12.5W) **-13** 1350 lm (12.5W)	**(Blank)**[5] 38° **S** 18° **N** 25° **W** 60° **T**[1,6] 10° **E**[7] 90°	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[8,9] Sunset **HC**[10,11] Human Centric **C5**[1,12] 2700K-5000K **4T**[13] Tunable White 4000K-1800K	**(Blank)** 120V, Triac/ELV **D**[14] 120/277V, 0-10V/ Triac/ELV Dims to 1% **A** DALI-2 DT8 120/277V, Dims to 0.1%

Example: **E25ABZ11-0324** [2" Koto™ Sylo Wall Mount, All Bronze, 1150 lumens, 38° Beam Angle, 350 lumens, 38° Beam Angle, 2400K, Triac/ELV]

[1]Available as 120V, Triac/ELV only
[2]Available in 2400K, 2700K & 3000K color temperature only
[3]Available with CT5 color temperature only
[4]Available with Tunable White color temperature only
[5]Includes 25° and 60° lens the box
[6]Available with 350 and 750 lumen, 2700K and 3000K options only
[7]90° Frosted Reflector
[8]Available with -09 and -11 lumen outputs only
[9]Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[10]Available with 1150 lumen (-11) outputs only
[11]Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[12]Available with -08 and -10 lumen outputs only
[13]Available with -08A output and DALI-2 DT8 dimmable (0.1%) only
[14]Only available for 950 lumens



3" Standard Koto™ Module Product Number Builder

Style	Finish	Module(Down)	Beam Angle	Module(Up)	Beam Angle	Color Temperature	Dimming
E36A 3" Wall Mount	**W** White **B** Black **BZ** Bronze	**(Blank)** No Module **03**[1,2] 350 lm (5W) **07** 750 lm (10.5W) **08**[1,3] 825 lm (10.5W) **08A**[4] 880 lm (11.5W) **09** 950 lm (10.5W) **10** 1000 lm (12.5W) **11** 1150 lm (12.5W) **13** 1350 lm (12.5W)	**(Blank)**[5] 38° **S** 18° **N** 25° **W** 60° **T**[1,6] 10° **E**[7] 90°	**(Blank)** No Module **-03**[1,2] 350 lm (5W) **-07** 750 lm (10.5W) **-08**[1,3] 825 lm (10.5W) **-08A**[4] 880 lm (11.5W) **-09** 950 lm (10.5W) **-10** 1000 lm (12.5W) **-11** 1150 lm (12.5W) **-13** 1350 lm (12.5W)	**(Blank)**[5] 38° **S** 18° **N** 25° **W** 60° **T**[1,6] 10° **E**[7] 90°	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[8,9] Sunset **HC**[10,11] Human Centric **C5**[1,12] 2700K-5000K **4T**[13] Tunable White 4000K-1800K	**(Blank)** 120V, Triac/ELV **D**[14] 120/277V, 0-10V/ Triac/ELV Dims to 1% **A** DALI-2 DT8 120/277V, Dims to 0.1%

Example: **E36ABZ11-0935** [3" Koto™ Sylo Wall Mount, All Bronze, 1150 lumens, 38° Beam Angle, 950 lumens, 38° Beam Angle, 3500K, Triac/ELV]

[1]Available as 120V, Triac/ELV only
[2]Available in 2400K, 2700K & 3000K color temperature only
[3]Available with C5 color temperature only
[4]Available with Tunable White color temperature only
[5]Includes 25° and 60° lens the box
[6]Available with 350 and 750 lumen, 2700K and 3000K options only
[7]90° Frosted Reflector
[8]Available with -09 and -11 lumen outputs only
[9]Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[10]Available with 1150 lumen (-11) outputs only
[11]Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[12]Available with -08 and -10 lumen outputs only
[13]Available with -08A output and DALI-2 DT8 dimmable (0.1%) only
[14]Only available for 950 lumens

The **Koto™ Sylo** System


2″ Aperture Fixtures with Twist-On System



95+ CRI | WET LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

NEW!

2″, 3″ & 4″ Wall Mount Koto™ Sylo



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- **Optional UP/DOWN lighting**
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K Tunable White option with range of 4000K to 1800K.
- Title 24 JA8-2025 Compliant



4″ Standard Koto™ Module Product Number Builder

Style	Finish	Module(Down)	Beam Angle	Module(Up)	Beam Angle	Color Temperature	Dimming
E42A 4″ Wall Mount	**W** White **B** Black **BZ** Bronze	**(Blank)** No Module **03**[1,2] 350 lm (5W) **07** 750 lm (10.5W) **08**[1,3] 825 lm (10.5W) **08A**[4] 880 lm (11.5W) **09** 950 lm (10.5W) **10**[1,3] 1000 lm (12.5W) **11** 1150 lm (12.5W) **13**[5] 1350 lm (12.5W)	**(Blank)**[6] 38° **-S** 18° **-N** 25° **-W** 60° **-T**[1,7] 10° **-E**[8] 90°	**(Blank)** No Module **-03**[1,2] 350 lm (5W) **-07** 750 lm (10.5W) **-08**[1,3] 825 lm **-08A**[4] 880 lm (11.5W) **-09** 950 lm (10.5W) **-10**[1,3] 1000 lm (12.5W) **-11** 1150 lm (12.5W) **-13**[5] 1350 lm (12.5W)	**(Blank)**[6] 38° **S** 18° **N** 25° **W** 60° **T**[1,7] 10° **E**[8] 90°	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **HC**[9,10] Human Centric **C5**[1,11] 2700K-5000K **4T**[12] Tunable White 4000K-1800K	**(Blank)** 120V, Triac/ELV **D**[13] 120/277V, 0-10V/ Triac/ELV Dims to 1% **A** DALI-2 DT8 120/277V, Dims to 0.1%

Example: **E42AW07-0740** [4″ Koto™ Sylo Wall Mount, All White, 750 lumens, 38° Beam Angle, 750 lumens, 38° Beam Angle, 4000K, Triac/ELV]

[1]Available as 120V, Triac/ELV only
[2]Available in 2400K, 2700K & 3000K color temperature only
[3]Available with C5 color temperature only
[4]Available with Tunable White color temperature only
[5]Available as 120/277V, 0-10V/Triac/ELV
[6]Includes 25° and 60° lens the box
[7]Available with 350 and 750 lumen, 2700K and 3000K options only
[8]90° Frosted Reflector
[9]Available with 1150 lumen (-11) outputs only
[10]Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[11]Available with -08 and -10 lumen outputs only
[12]Available with -08A output and DALI-2 DT8 dimmable (0.1%) only
[13]Only available for 950 and 1350 lumens

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | WET LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

NEW!



2″ & 3″ Wall Mount Downlight Only Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- **For Downlighting use only**
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K Tunable White option with range of 4000K to 1800K.
- Title 24 JA8-2025 Compliant



For DOWNLIGHTING Only

Standard Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E25NY 2″ Wall mount Downlight	**W** All White	**-03**[1,2] 350 lm (5W)	**24** 2400K	**(Blank)** Triac/ELV	**(Blank)**[12] 38°
E36NY 3″ Wall mount Downlight	**B** All Black	**-07** 750 lm (10.5W)	**27** 2700K	**D**[11] 0-10V/Triac/ELV (1%)	**-S** 18°
		-08[1,3] 825 lm (10.5W)	**30** 3000K	**A** DALI-2 DT8, 120/277V (0.1%)	**-N** 25°
		-08A[4] 850 lm (11.5W)	**35** 3500K		**-W** 60°
		-09 950 lm (10.5W)	**40** 4000K		**-T**[1,13] 10°
		-10[1,3] 1000 lm (12.5W)	**SD**[5,6] Sunset		**-E**[14] 90°
		-11 1150 lm (12.5W)	**HC**[7,8] Human Centric		
		-13 1350 lm (12.5W)	**C5**[1,9] 2700K-5000K		
			4T[10] Tunable White 4000K - 1800K		

Example: **E25NYB-0740-N** [2″ Koto™ Sylo Wall Mount Downlight, All Black, 750 lumens, 4000K, Triac/ELV, 25° Beam Angle]

[1]Available as 120V, Triac/ELV only
[2]Available 2700K and 3000K color temperature only
[3]Available with C5 color temperature only
[4]Available with Tunable White color temperature only
[5]Available with -09 and -11 lumen outputs only
[6]Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[7]Available with 1150 lumen (-11) outputs only
[8]Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[9]Available with -08 and -10 lumen outputs only
[10]Available with -08A output and DALI-2 DT8 dimmable (0.1%)
[11]Only available for 950 lumens
[12]Includes 25° and 60° lens in the box
[13]Available with 350 and 750 lumen, 2700K and 3000K options only
[14]90° Frosted Reflector

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | WET LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

2″ Surface Mount Koto™ Sylo



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- **Sunset** option dims from 3000K to 1800K. **Human Centric** option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2025 Compliant



Standard Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle
E25F 2″ Fixed	**W** All White **B** All Black **S** All Silver	**-03**[1] 350 lm (5W) **-07** 750 lm (10.5W) **-09** 950 lm (10.5W) **-11** 1150 lm (12.5W) **-13** 1350 lm (12.5W)	**(Blank)** 120V, Triac/ELV	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[2,3] Sunset **HC**[4,5] Human Centric	**(Blank)**[6] 38° **-S** 18° **-N** 25° **-W** 60° **-T**[7] 10° **-E**[8] 90°
		-08 825 lm (10.5W) **-10** 1000 lm (12.5W)	**(Blank)** 120V, Triac/ELV	**CT5** 2700K-5000K	

Example: **E25FW-0735** [2″ Koto™ Sylo Surface Mount, All White, 750 lumens, 120V, Triac/ELV, 3500K, 38° Beam Angle]

[1] Available in 2400K, 2700K & 3000K Color Temperature only
[2] Available in -09 & -11 lumen outputs only
[3] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[4] Available with 1150 lumen (-11) output only
[5] Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[6] Includes 25° and 60° lens in the box
[7] Available with 350 (-03) & 750 lumen (-07), 2700K & 3000K options only
[8] 90° Frosted Reflector



0-10V/Triac/ELV Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle
E25F 2″ Fixed	**W** All White **B** All Black **S** All Silver	**-10** 1000 lm (11.8W)	**DX** 120-277V, 0-10V/ Triac/ELV, Dims to 1%	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1] Sunset	**(Blank)**[2] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[3] 90°

Example: **E25FW-10DX30** [2″ 0-10V/Triac/ELV Koto™ Sylo Surface Mount, All White, 1000 lumens, 120-277V, 0-10V/Triac/ELV, Dims to 1%, 3000K, 38° Beam Angle]

[1] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[2] Includes 25° and 60° lens in the box
[3] 90° Frosted Reflector

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | WET LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

2″ Surface Mount Koto™ Sylo



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K Tunable White option with range of 4000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025 Compliant



Koto™ Focus Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle
E25F 2″ Fixed	**W** All White **B** All Black **S** All Silver	**-07** 750 lm (10.5W)	**(Blank)** 120V, Triac/ELV	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1] Sunset	**-FC**[2] 18° - 50°

Example: **E25FB-07SD-FC** [2″ Koto™ Focus Sylo Surface Mount, All Black, 750 lumens, 120V,Triac/ELV, Sunset 3000K -1800K, 18°-50° Beam Angle]

[1] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

[2] **Adjustable Focus** offers 18°-50° with a twist of the snoot. Koto™ Focus LED Module includes white snoot installed on module and field changeable black snoot. Not compatible with lens accessories.



DALI-2 DT8 Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle
E25F 2″ Fixed	**W** All White **B** All Black **S** All Silver	**-08** 880 lm (11.5W)	**A** DALI-2 DT8, 120-277V, Dims to 0.1%	**4T** Tunable White 4000K-1800K	**(Blank)**[1] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[2] 90°

Example: **E25FW-08A4T** [2″ Dali 2 Koto™ Sylo Surface Mount, All White, 880 lumens, Dali 2, 120-277V Dims to 0.1%, Tunable White 4000K -1800K, 38° Beam Angle]

[1] Includes 25° and 60° lens in the box

[2] 90° Frosted Reflector



Low Voltage Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle
E25F 2″ Fixed	**W** All White **B** All Black **S** All Silver	**-08** 800 lm (10W)	**12A** 12V AC **24D** 24V DC	**27** 2700K **30** 3000K **SD**[1] Sunset	**(Blank)**[2] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[3] 90°

Example: **E25FS-0824D30** [2″ Low Voltage Koto™ Sylo Surface Mount, All Silver, 800 lumens, 24V DC, 3000K, 38° Beam Angle]

[1] Available in 12A (12V AC) voltage only, Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

[2] Includes 25° and 60° lens in the box

[3] 90° Frosted Reflector

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | WET LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

3″ Surface Mount Koto™ Sylo



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K Tunable White option with range of 4000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025 Compliant

Standard Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E36F 3″ Fixed	**W** All White **B** All Black **S** All Silver	**-03**[1,2] 350 lm (5W) **-07** 750 lm (10.5W) **-09** 950 lm (10.5W) **-11** 1150 lm (12.5W) **-13** 1350 lm (12.5W) **-15** 1500 lm (14.7W) **-18** 1800 lm (18.9W) **-08**[1] 825 lm (10.5W) **-10**[1] 1000 lm (12.5W)	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[3,4] Sunset **HC**[1,5,6] Human Centric **AMD**[7,8] Amber **CT5**[1,9] 2700K-5000K	**(Blank)** 120V, Triac/ELV **D** 120-277V, 0-10V/Triac/ELV, Dims to 1%	**(Blank)**[10] 38° **-S** 18° **-N** 25° **-W** 60° **-T**[1,11] 10° **-E**[12] 90°

Example: **E36FW-0940D** [3″ Koto™ Sylo Surface Mount, All White, 950 lumens, 4000K, 120/277V, 0-10V/Triac/ELV Dims to 1%, 38° Beam Angle]

[1] Available as 120V, Triac/ELV only
[2] Available in 2400K, 2700K & 3000K color temperature only
[3] Available in -09, -11, -13, & -15 lumen outputs
[4] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[5] Available with 1150 lumen (-11) output only
[6] Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[7] Turtle friendly
[8] Available with -03, -07, -09 and -11 lumen outputs only
[9] Available with -08 and -10 lumen outputs only
[10] Includes 25° and 60° lens in the box
[11] Available with 350 and 750 lumen, 2700K and 3000K options only
[12] 90° Frosted Reflector

DALI-2 DT8 Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E36F 3″ Fixed	**W** All White **B** All Black **S** All Silver	**-08** 880 lm (11.5W)	**4T** Tunable White 4000K-1800K	**A** DALI-2 DT8, 120-277V, Dims to 0.1%	**(Blank)**[1] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[2] 90°

Example: **E36FW-084TA** [3″ Dali 2 Koto™ Sylo Surface Mount, All White, 880 lumens, Tunable White 4000K-1800K, Dali 2, 120-277V Dims to 0.1%, 38° Beam Angle]

[1] Includes 25° and 60° lens in the box
[2] 90° Frosted Reflector

The **Koto™ Sylo** System

2" Aperture Fixtures with Twist-On System



95+ CRI | WET LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

3" Surface Mount Koto™ Sylo



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° and 90° lenses available
- Compatible with: 3 ½" and 4" Octagon and Round Junction Boxes, and 3 ¾" Square Junction Boxes
- Sunset option dims from 3000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025 Compliant



Koto™ Focus Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E36F 3" Fixed	**W** All White **B** All Black **S** All Silver	**-07** 750 lm (10.5W) **-09** 950 lm (12.5W) **-12** 1250 lm (16.8W)	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1,2] Sunset	**(Blank)** 120V, Triac/ELV **D** 120-277V, 0-10V/Triac/ELV, Dims to 1%	**FC**[3] 18° - 50°

Example: **E36FB-07SD-FC** [3" Koto™ Focus Sylo Surface Mount, All Black, 750 lumens, Sunset Dimming 3000K-1800K, 120V, Triac/ELV, 18°-50° beam angle]

[1] Available as 750 lumen (-07) output, 120V, Triac/ELV only
[2] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

[3] **Adjustable Focus** offers 18°-50° with a twist of the snoot. Koto™ Focus LED Module includes white snoot installed on module and field changeable black snoot. Not compatible with lens accessories.



Low Voltage Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle
E36F 3" Fixed	**W** All White **B** All Black **S** All Silver	**-08** 800 lm (9W-10W)	**12A** 12V AC **24D** 24V DC	**27** 2700K **30** 3000K **SD**[1] Sunset	**(Blank)**[2] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[3] 90°

Example: **E36FS-0812A-27** [3" Low Voltage Koto™ Sylo Surface Mount, All Silver, 800 lumens, 12V AC, 2700K, 38° beam angle]

[1] Available in 12A (12V AC) voltage only, Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

[2] Includes 25° and 60° lens in the box
[3] 90° Frosted Reflector

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI · DAMP LOCATION · WET LOCATION · IN TODAY OUT TODAY · 50K HRS 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE

4″ Surface Mount Koto™ Sylo



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18°, 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K Tunable White option with range of 4000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025 Compliant

Standard Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E42F (Wet) 4″ Fixed **E429F** (Damp) 4″ Adjustable tilt up to 30°, 359° rotation	**W** All White **B** All Black **S** All Silver	**-03**[1,2] 350 lm (5W) **-07** 750 lm (10.5W) **-09** 950 lm (10.5W) **-11** 1150 lm (12.5W) **-13** 1350 lm (12.5W) **-15** 1500 lm (14.7W) **-18** 1800 lm (18.9W) **-20**[3] 2000 lm (21W) **-25**[3,4] 2500 lm (23W) **-30**[3,4] 3000 lm (29W) **-08**[1] 825 lm (10.5W) **-10**[1] 1000 lm (12.5W)	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[5,6] Sunset **HC**[1,7] Human Centric **AMD**[8,9] Amber **CT5**[1,11] 2700K-5000K	**(Blank)** 120V, Triac/ELV **D** 120-277V, 0-10V/Triac/ELV, Dims to 1%	**(Blank)**[11] 38° **-S** 18° **-N** 25° **-W** 60° **-T**[1,12] 10° **-E**[13] 90°

Example: **E42FW-0924D** [4″ Fixed Koto™ Sylo Surface Mount, All White, 950 lumens, 2400K, 120-277V,0-10V/Triac/ELV Dims to 1%, 38° Beam Angle]

[1] Available as 120V, Triac/ELV only
[2] Available in 2400K, 2700K & 3000K color temperature only
[3] Available with 2700K, 3000K, 3500K, & 4000K Color Temperature only
[4] Available as 120/277V, 0-10V/Triac/ELV only
[5] Available in -09, -11, -13, & -15 lumen outputs
[6] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[7] Available with 1150 lumen (-11) outputs only. Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[8] Turtle friendly
[9] Available with -03, -07, -09 and -11 lumen outputs only
[10] Available with -08 and -10 lumen outputs only
[11] Includes 25° and 60° lens in the box
[12] Available with 350 and 750 lumen, 2700K and 3000K options only
[13] 90° Frosted Reflector



DALI-2 DT8 Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E42F (Wet) 4″ Fixed **E429** (Damp) 4″ Adjustable tilt up to 30°, 359° rotation	**W** All White **B** All Black **S** All Silver	**-08** 880 lm (11.5W)	**4T** Tunable White 4000K-1800K	**A** DALI-2 DT8, 120-277V, Dims to 0.1%	**(Blank)**[1] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[2] 90°

Example: **E429FB-084TA** [4″ Dali 2 Adjustable Koto™ Sylo Surface Mount, All Black, 880 lumens, Tunable White 4000K-1800K, DALI-2 DT8, 120-277V Dims to 0.1%, 38° Beam Angle]

[1] Includes 25° and 60° lens in the box
[2] 90° Frosted Reflector

The **Koto™ Sylo** System

2" Aperture Fixtures with Twist-On System



95+ CRI · DAMP LOCATION · WET LOCATION · IN TODAY OUT TODAY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE

4" Surface Mount Koto™ Sylo



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18°, 90° lenses available
- Compatible with: 3 ½" and 4" Octagon and Round Junction Boxes
- Sunset option dims from 3000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025 Compliant



Koto™ Focus Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E42F (Wet) 4" Fixed **E429F** (Damp) 4" Adjustable tilt up to 30°, 359° rotation	**W** All White **B** All Black **S** All Silver	**-07** 750 lm (10.5W) **-09** 950 lm (12.5W) **-12** 1250 lm (16.8W)	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1,2] Sunset	**(Blank)** 120,V Triac/ELV **D** 120-277V, 0-10V/Triac/ELV, Dims to 1%	**FC**[3] 18° - 50°

Example: **E429FB-1240** [4" Adjustable Koto™ Focus Sylo Surface Mount, All Black, 1250 lumens, 4000K, 120V Triac/ELV, 18°-50° Beam Angle]

[1] Available as 120V, Triac/ELV only
[2] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[3] **Adjustable Focus** offers 18°-50° with a twist of the snoot. Koto™ Focus LED Module includes white snoot installed on module and field changeable black snoot. Not compatible with lens accessories.



Low Voltage Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle
E42F (Wet) 4" Fixed **E429F** (Damp) 4" Adjustable tilt up to 30°, 359° rotation	**W** All White **B** All Black **S** All Silver	**-08** 800 lm (9W-10W)	**12A** 12V AC **24D** 24V DC	**27** 2700K **30** 3000K **SD**[1,2] Sunset	**(Blank)**[3] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[4] 90°

Example: **E429FS-0824D27** [4" Low Voltage Adjustable Koto™ Sylo Surface Mount, All Silver, 800 lumens, 24V DC, 2700K, 38° Beam Angle]

[1] Available in 12A (12V AC) voltage only
[2] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[3] Includes 25° and 60° lens in the box
[4] 90° Frosted Reflector

The **Koto Sylo**™ System

2″ Aperture Fixtures with Twist-On System



95+ CRI | DAMP LOCATION | WET LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE



6″ Surface Mount Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18°, 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2025 Compliant

Standard Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E648F (Wet) 6″ Fixed **E629F** (Damp) 6″ Adjustable tilt up to 35°, 359° rotation	**W** All White **B** All Black	**-03**[1,2] 350 lm (5W) **-07** 750 lm (10.5W) **-09** 950 lm (10.5W) **-11** 1150 lm (12.5W) **-13** 1350 lm (11.8W) **-15** 1500 lm (12.5W) **-18** 1800 lm (12.5W) **-20** 2000 lm (21W) **-25**[3,4] 2500 lm (23W) **-30**[3,4] 3000 lm (29W) **-35**[3,4] 3500 lm (32W) **-08**[1] 825 lm (10.5W) **-10**[1] 1000 lm (12.5W)	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[5,6] Sunset **HC**[1,7,8] Human Centric **AMD**[9,10] Amber **CT5**[1,11] 2700K - 5000K	**(Blank)** 120V Triac/ELV **D** 120-277V, 0-10V/Triac/ELV, Dims to 1%	**(Blank)**[12] 38° **-S** 18° **-N** 25° **-W** 60° **-T**[1,13] 10° **-E**[14] 90°

Example: **E648FW-0930** [6″ Fixed Koto™ Sylo Surface Mount, All White, 950 lumens, 3000K, 120V, Triac/ELV, 38° Beam Angle]

[1] Available as 120V, Triac/ELV only
[2] Available in 2400K, 2700K & 3000K color temperature only
[3] Available as 120/277V, 0-10V/Triac/ELV only
[4] Available with 2700K, 3000K, 3500K, & 4000K Color Temperature only
[5] Available in -09, -11, -13, & -15 lumen outputs
[6] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[7] Available with 1150 lumen (-11) outputs only
[8] Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[9] Turtle friendly
[10] Available with -03, -07, -09 and -11 lumen outputs only
[11] Available with -08 and -10 lumen outputs only
[12] Includes 25° and 60° lens in the box
[13] Available with 350 and 750 lumen, 2700K and 3000K options only
[14] 90° Frosted Reflector

The **Koto Sylo**™ System

2″ Aperture Fixtures with Twist-On System



95+ CRI | DAMP LOCATION | WET LOCATION | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | JA8 TITLE 24 COMPLIANT | DIMMABLE

6″ Surface Mount Koto™ Sylo



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes
- Sunset option dims from 3000K to 1800K. Tunable White option with range of 4000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025 Compliant

DALI-2 DT8 Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E648F (Wet) 6″ Fixed **E629F** (Damp) 6″ Adjustable tilt up to 35°, 359° rotation	**W** All White **B** All Black	**-08** 880 lm (11.5W)	**4T** Tunable White 4000K-1800K	**A** DALI-2 DT8, 120-277V, Dims to 0.1%	**(Blank)**[1] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[2] 90°

Example: **E629FW-084TA** [6″ DALI-2 DT8 Adjustable Koto Sylo™ Surface Mount, All White, 880 lumens, Tunable White 4000K-1800K, DALI-2 DT8, 120-277V Dims to 0.1%, 38° Beam Angle]

[1] Includes 25° and 60° lens in the box
[2] 90° Frosted Reflector



Low Voltage Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle
E648F (Wet) 6″ Fixed **E629F** (Damp) 6″ Adjustable tilt up to 35°, 359° rotation	**W** All White **B** All Black	**-08** 800 lm (9W-10W)	**12A** 12V AC **24D** 24V DC	**27** 2700K **30** 3000K **SD**[1,2] Sunset	**(Blank)**[3] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[4] 90°

Example: **E629FB-0824D30** [6″ Low Voltage Adjustable Koto Sylo™ Surface Mount, All Black, 800 lumens, 24V DC, 3000K, 38° Beam Angle]

[1] Available in 12A (12V AC) voltage only
[2] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[3] Includes 25° and 60° lens in the box
[4] 90° Frosted Reflector

The **Koto Sylo**™ System

2″ Aperture Fixtures with Twist-On System



95+ CRI | DAMP LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE



2″ Pendant Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18°, 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- Available with 120″ Field Cuttable Cable or Stems (12″, 24″, 36″, 48″, 60″, 72″, and 84″)
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2025 Compliant



Standard Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E25P 2″ Fixed	**W** All White	**-03**[1] 350 lm (5W)	**(Blank)** 120V, Triac/ELV	**24** 2400K	**(Blank)**[6] 38°	**(Blank)**[9] 120″ Cable Mount
	B All Black	**-07** 750 lm (10.5W)		**27** 2700K	**-S** 18°	**-12**[10] 12″ Stem
	S All Silver	**-09** 950 lm (10.5W)		**30** 3000K	**-N** 25°	**-24**[10] 24″ Stem
		-11 1150 lm (12.5W)		**35** 3500K	**-W** 60°	**-36**[10] 36″ Stem
		-13 1350 lm (12.5W)		**40** 4000K	**-T**[7] 10°	**-48**[10] 48″ Stem
				SD[2,3] Sunset	**-E**[8] 90°	**-60**[10] 60″ Stem
				HC[4,5] Human Centric		**-72**[10] 72″ Stem
		-08 825 lm (10.5W)	**(Blank)**	**CT5** 2700K-5000K		**-84**[10] 84″ Stem
		-10 1000 lm (12.5W)	120V, Triac/ELV			

Example: **E25PW-1135-72** [2″ Koto™ Sylo Pendant, All White, 1150 lumens, 120V,Triac/ELV, 3500K, 38° Beam Angle, 72″ Stem]

[1] Available in 2400K, 2700K & 3000K Color Temperature only
[2] Available in -09 & -11 lumen outputs only
[3] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[4] Available with 1150 lumen (-11) output only
[5] Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[6] Includes 25° and 60° lens in the box
[7] Available with 350 (-03) & 750 lumen (-07), 2700K & 3000K options only
[8] 90° Frosted Reflector
[9] 120 inch field cuttable cable
[10] Stem is not field cuttable



0-10V/Triac/ELV Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E25P 2″ Fixed	**W** All White	**-10** 1000 lm (11.8W)	**DX** 120-277V, 0-10V Triac/ELV, Dims to 1%	**27** 2700K	**(Blank)**[2] 38°	**(Blank)**[4] 120″ Cable Mount
	B All Black			**30** 3000K	**-S** 18°	**-12**[5] 12″ Stem
	S All Silver			**35** 3500K	**-N** 25°	**-24**[5] 24″ Stem
				40 4000K	**-W** 60°	**-36**[5] 36″ Stem
				SD[1] Sunset	**-E**[3] 90°	**-48**[5] 48″ Stem
						-60[5] 60″ Stem
						-72[5] 72″ Stem
						-84[5] 84″ Stem

Example: **E25PW-10DX27** [2″ 0-10V/Triac/ELV Koto™ Sylo Pendant, All White, 1000 lumens, 120-277V,0-10V/Triac/ELV, Dims to 1%, 2700K, 38° Beam Angle, 120″ cable mount]

[1] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[2] Includes 25° and 60° lens in the box
[3] 90° Frosted Reflector
[4] 120 inch field cuttable cable
[5] Stem is not field cuttable

The **Koto Sylo**™ System

2" Aperture Fixtures with Twist-On System

95+ CRI | DAMP LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE



2" Pendant Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° and 90° lenses available
- Compatible with: 3 ½" and 4" Octagon and Round Junction Boxes, and 3 ¾" Square Junction Boxes
- Available with 120" Field Cuttable Cable or Stems (12", 24", 36", 48", 60", 72", and 84")
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200. Tunable White option with range of 4000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Koto™ Focus Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E25P 2" Fixed	**W** All White **B** All Black **S** All Silver	**-07** 750 lm (10.5W)	**(Blank)** 120V, Triac/ELV	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1] Sunset	**-FC**[2] 18° - 50°	**(Blank)**[3] 120" Cable Mount **-12**[4] 12" Stem **-24**[4] 24" Stem **-36**[4] 36" Stem **-48**[4] 48" Stem **-60**[4] 60" Stem **-72**[4] 72" Stem **-84**[4] 84" Stem

Example: **E25PB-0735-FC** [2" Koto™ Focus Sylo Pendant, All Black, 750 lumens, 120V,Triac/ELV, 3500K, 18°-50° Beam Angle, 120" Cable Mount]

[1] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

[2] **Adjustable Focus** offers 18°-50° with a twist of the snoot. Koto™ Focus LED Module includes white snoot installed on module and field changeable black snoot. Not compatible with lens accessories.

[3] 120 inch field cuttable cable

[4] Stem is not field cuttable



DALI-2 DT8 Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E25P 2" Fixed	**W** All White **B** All Black **S** All Silver	**-08** 880 lm (11.5W)	**A** DALI-2 DT8 120-277V, Dims to 0.1%	**4T** Tunable White 4000K-1800K	**(Blank)**[1] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[2] 90°	**(Blank)**[3] 120" Cable Mount **-12**[4] 12" Stem **-24**[4] 24" Stem **-36**[4] 36" Stem **-48**[4] 48" Stem **-60**[4] 60" Stem **-72**[4] 72" Stem **-84**[4] 84" Stem

Example: **E25PS-08A4T** [2" DALI-2 DT8 Koto™ Sylo Pendant, All Silver, 880 lumens, Dali 2, 120-277V Dims to 0.1%, Tunable White 4000K-1800K, 38° Beam Angle, 120" Cable Mount]

[1] Includes 25° and 60° lens in the box [2] 90° Frosted Reflector [3] 120 inch field cuttable cable [4] Stem is not field cuttable



Low Voltage Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E25P 2" Fixed	**W** All White **B** All Black **S** All Silver	**-08**[1] 800 lm (10W)	**12A** 12V AC **24D** 24V DC	**27** 2700K **30** 3000K **SD**[2] Sunset	**(Blank)**[3] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[4] 90°	**(Blank)**[5] 120" Cable Mount **-12**[6] 12" Stem **-24**[6] 24" Stem **-36**[6] 36" Stem **-48**[6] 48" Stem **-60**[6] 60" Stem **-72**[6] 72" Stem **-84**[6] 84" Stem

Example: **E25PW-0812A27-12** [2" Low Voltage Koto Sylo™ Pendant, All White, 800 lumens, 12V AC, 2700K, 38° Beam Angle, 12" Stem]

[1] External power source required [2] Available in 12A (12V AC) voltage only, Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed [3] Includes 25° and 60° lens in the box [4] 90° Frosted Reflector [5] 120 inch field cuttable cable [6] Stem is not field cuttable

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI · DAMP LOCATION · IN TODAY OUT TODAY · 50,000 HOURS · TITLE 24 COMPLIANT · DIMMABLE



3″ Pendant Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- Available with 120″ Field Cuttable Cable or Stems (12″, 24″, 36″, 48″, 60″, 72″, and 84″)
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K Tunable White option with range of 4000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025 Compliant



Standard Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E36P 3″ Fixed	**W** All White **B** All Black **S** All Silver	**-03**[1,2] 350 lm (5W) **-07** 750 lm (10.5W) **-09** 950 lm (10.5W) **-11** 1150 lm (12.5W) **-13** 1350 lm (12.5W) **-15** 1500 lm (14.7W) **-18** 1800 lm (18.9W) **-08**[1] 825 lm (10.5W) **-10**[1] 1000 lm (12.5W)	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[3,4] Sunset **HC**[1,5,6] Human Centric **AMD**[7,8] Amber **CT5**[1,9] 2700K-5000K	**(Blank)** 120V Triac/ELV **D** 120-277V, 0-10V/Triac/ELV Dims to 1%	**(Blank)**[10] 38° **-S** 18° **-N** 25° **-W** 60° **-T**[1,11] 10° **-E**[12] 90°	**(Blank)**[13] 120″ Cable Mount **-12**[14] 12″ Stem **-24**[14] 24″ Stem **-36**[14] 36″ Stem **-48**[14] 48″ Stem **-60**[14] 60″ Stem **-72**[14] 72″ Stem **-84**[14] 84″ Stem

Example: **E36PW-0940-S-84** [3″ Koto™ Sylo Pendant, All White, 950 lumens, 4000K, 120V Triac/ELV, 18° Beam Angle, 84″ Stem]

[1] Available as 120V, Triac/ELV only
[2] Available in 2400K, 2700K & 3000K color temperature only
[3] Available in -09, -11, -13, & -15 lumen outputs
[4] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[5] Available with 1150 lumen (-11) output only
[6] Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[7] Turtle friendly
[8] Available with -03, -07, -09 and -11 lumen outputs only
[9] Available with -08 and -10 lumen outputs only
[10] Includes 25° and 60° lens in the box
[11] Available with 350 and 750 lumen, 2700K and 3000K options only
[12] 90° Frosted Reflector
[13] 120 inch field cuttable cable
[14] Stem is not field cuttable



DALI-2 DT8 Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E36P 3″ Fixed	**W** All White **B** All Black **S** All Silver	**-08** 880 lm (11.5W)	**4T** Tunable White 4000K-1800K	**A** DALI-2 DT8, 120-277V, Dims to 0.1%	**(Blank)**[1] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[2] 90°	**(Blank)**[3] 120″ Cable Mount **-12**[4] 12″ Stem **-24**[4] 24″ Stem **-36**[4] 36″ Stem **-48**[4] 48″ Stem **-60**[4] 60″ Stem **-72**[4] 72″ Stem **-84**[4] 84″ Stem

Example: **E36PW-084TA-12** [3″ DALI-2 DT8 Koto™ Sylo Pendant, All White, 880 lumens, Tunable White 4000K-1800K, DALI-2 DT8, 120-277V Dims to 0.1%, 38° Beam Angle, 12″ Stem]

[1] Includes 25° and 60° lens in the box [2] 90° Frosted Reflector [3] 120 inch field cuttable cable [4] Stem is not field cuttable

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | DAMP LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE



3″ Pendant Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- Available with 120″ Field Cuttable Cable or Stems (12″, 24″, 36″, 48″, 60″, 72″, and 84″)
- Sunset option dims from 3000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025 Compliant



Koto™ Focus Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E36P 3″ Fixed	**W** All White **B** All Black **S** All Silver	**-07** 750 lm (10.5W) **-09** 950 lm (12.5W) **-12** 1250 lm (16.8W)	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1,2] Sunset	**(Blank)** 120V, Triac/ELV **D** 120-277V, 0-10V/Triac/ELV, Dims to 1%	**-FC**[3] 18° - 50°	**(Blank)**[4] 120″ Cable Mount **-12**[5] 12″ Stem **-24**[5] 24″ Stem **-36**[5] 36″ Stem **-48**[5] 48″ Stem **-60**[5] 60″ Stem **-72**[5] 72″ Stem **-84**[5] 84″ Stem

Example: **E36PB-0930-FC-24** [3″ Koto™ Focus Sylo Pendant, All Black, 950 lumens, 3000K, 120V,Triac/ELV, 18°-50° Beam Angle, 24″ Stem]

[1] Available as 750 lumen (-07) output, 120V, Triac/ELV only
[2] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[3] **Adjustable Focus** offers 18°-50° with a twist of the snoot. Koto™ Focus LED Module includes white snoot installed on module and field changeable black snoot. Not compatible with lens accessories.
[4] 120 inch field cuttable cable
[5] Stem is not field cuttable



Low Voltage Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E36P 3″ Fixed	**W** All White **B** All Black **S** All Silver	**-08**[1] 800 lm (10W)	**12A** 12V AC **24D** 24V DC	**27** 2700K **30** 3000K **SD**[2] Sunset	**(Blank)**[3] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[4] 90°	**(Blank)**[5] 120″ Cable Mount **-12**[6] 12″ Stem **-24**[6] 24″ Stem **-36**[6] 36″ Stem **-48**[6] 48″ Stem **-60**[6] 60″ Stem **-72**[6] 72″ Stem **-84**[6] 84″ Stem

Example: **E36PS-0812A30-12** [3″ Low Voltage Koto™ Sylo Pendant, All Silver, 800 lumens, 12V AC, 3000K, 38° Beam Angle, 12″ Stem]

[1] External power source required
[2] Available in 12A (12V AC) voltage only
[3] Includes 25° and 60° lens in the box
[4] 90° Frosted Reflector
[5] 120 inch field cuttable cable
[6] Stem is not field cuttable

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | DAMP LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE



4″ Pendant Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- Available with 120″ Field Cuttable Cable or Stems (12″, 24″, 36″, 48″, 60″, 72″, and 84″)
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K Tunable White option with range of 4000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025 Compliant
- 30° MAX. tilt (E429P Adjustable Pendant Series Only)



Standard Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E42P 4″ Fixed	**W** All White	**-03**[1,2] 350 lm (5W)	**24** 2400K	**(Blank)** 120V, Triac/ELV	**(Blank)**[12] 38°	**(Blank)**[15] 120″ Cable Mount
E429P 4″ Adjustable tilt up to 30°, 359° rotation	**B** All Black	**-07** 750 lm (10.5W)	**27** 2700K	**D** 120-277V, 0-10V/Triac/ELV Dims to 1%	**-S** 18°	**-12**[16] 12″ Stem
	S All Silver	**-09** 950 lm (10.5W)	**30** 3000K		**-N** 25°	**-24**[16] 24″ Stem
		-11 1150 lm (12.5W)	**35** 3500K		**-W** 60°	**-36**[16] 36″ Stem
		-13 1350 lm (12.5W)	**40** 4000K		**-T**[1,13] 10°	**-48**[16] 48″ Stem
		-15 1500 lm (14.7W)	**SD**[5,6] Sunset		**-E**[14] 90°	**-60**[16] 60″ Stem
		-18 1800 lm (18.9W)	**HC**[1,7,8] Human Centric			**-72**[16] 72″ Stem
		-20[3] 2000 lm (21W)	**AMD**[9,10] Amber			**-84**[16] 84″ Stem
		-25[3,4] 2500 lm (23W)				
		-30[3,4] 3000 lm (29W)				
		-08[1] 825 lm (10.5W)	**CT5**[1,11] 2700K-5000K			
		-10[1] 1000 lm (12.5W)				

Example: **E429PW-0940-S-84** [4″ Koto™ Sylo Fixed Pendant, All White, 950 lumens, 4000K, 120V, Triac/ELV, 18° Beam Angle, 84″ Stem]

[1] Available as 120V, Triac/ELV only
[2] Available in 2400K, 2700K & 3000K color temperature only
[3] Available with 2700K, 3000K, 3500K, & 4000K Color Temperature only
[4] Available as 120/277V, 0-10V/Triac/ELV only
[5] Available in -09, -11, -13, & -15 lumen outputs
[6] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[7] Available with 1150 lumen (-11) outputs only
[8] Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[9] Turtle friendly
[10] Available with -03, -07, -09 and -11 lumen outputs only
[11] Available with -08 and -10 lumen outputs only
[12] Includes 25° and 60° lens in the box
[13] Available with 350 and 750 lumen, 2700K and 3000K options only
[14] 90° Frosted Reflector
[15] 120 inch field cuttable cable
[16] Stem is not field cuttable



DALI-2 DT8 Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E42P 4″ Fixed	**W** All White	**-08** 880 lm (11.5W)	**4T** Tunable White 4000K-1800K	**A** DALI-2 DT8, 120-277V, Dims to 0.1%	**(Blank)**[1] 38°	**(Blank)**[3] 120″ Cable Mount
E492P 4″ Adjustable tilt up to 30°, 359° rotation	**B** All Black				**-S** 18°	**-12**[4] 12″ Stem
	S All Silver				**-N** 25°	**-24**[4] 24″ Stem
					-W 60°	**-36**[4] 36″ Stem
					-E[2] 90°	**-48**[4] 48″ Stem
						-60[4] 60″ Stem
						-72[4] 72″ Stem
						-84[4] 84″ Stem

Example: **E429PW-084TA-12** [4″ DALI-2 DT8 Koto™ Sylo Adjustable Pendant, All White, 880 lumens, Tunable White 4000K-1800K, Dali 2, 120-277V Dims to 0.1%, 38° Beam Angle, 12″ Stem]

[1] Includes 25° and 60° lens in the box
[2] 90° Frosted Reflector
[3] 120 inch field cuttable cable
[4] Stem is not field cuttable

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | DAMP LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE



4″ Pendant Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- Available with 120″ Field Cuttable Cable or Stems (12″, 24″, 36″, 48″, 60″, 72″, and 84″)
- Sunset option dims from 3000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025 Compliant
- 30° MAX. tilt (E429P Adjustable Pendant Series Only)



Koto™ Focus Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E42P 4″ Fixed	**W** All White	**-07** 750 lm (10.5W)	**27** 2700K	**(Blank)** 120V, Triac/ELV	**-FC**[3] 18° - 50°	**(Blank)**[4] 120″ Cable Mount
E429P 4″ Adjustable tilt up to 30°, 359° rotation	**B** All Black	**-09** 950 lm (12.5W)	**30** 3000K	**D** 120-277V, 0-10V/Triac/ELV, Dims to 1%		**-12**[5] 12″ Stem
	S All Silver	**-12** 1250 lm (16.8W)	**35** 3500K			**-24**[5] 24″ Stem
			40 4000K			**-36**[5] 36″ Stem
			SD[1,2] Sunset			**-48**[5] 48″ Stem
						-60[5] 60″ Stem
						-72[5] 72″ Stem
						-84[5] 84″ Stem

Example: **E42PB-0927-FC-60** [4″ Koto™ Focus Sylo Fixed Pendant, All Black, 950 lumens, 2700K, 120V,Triac/ELV, 18°-50° Beam Angle, 60″ Stem]

[1] 120V, Triac/ELV only
[2] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

[3] **Adjustable Focus** offers 18°-50° with a twist of the snoot. Koto™ Focus LED Module includes white snoot installed on module and field changeable black snoot. Not compatible with lens accessories.

[4] 120 inch field cuttable cable
[5] Stem is not field cuttable



Low Voltage Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E42P 4″ Fixed	**W** All White	**-08** 800 lm (9W-10W)	**12A** 12V AC	**27** 2700K	**(Blank)**[3] 38°	**(Blank)**[5] 120″ Cable Mount
E429P 4″ Adjustable tilt up to 30°, 359° rotation	**B** All Black		**24D** 24V DC	**30** 3000K	**-S** 18°	**-12**[6] 12″ Stem
	S All Silver			**SD**[1,2] Sunset	**-N** 25°	**-24**[6] 24″ Stem
					-W 60°	**-36**[6] 36″ Stem
					-E[4] 90°	**-48**[6] 48″ Stem
						-60[6] 60″ Stem
						-72[6] 72″ Stem
						-84[6] 84″ Stem

Example: **E429PS-0812A30-N-36** [4″ Low Voltage Koto™ Sylo Adjustable Pendant, All Silver, 800 lumens, 12V AC, 3000K, 25° Beam Angle, 36″ Stem]

[1] Available in 12A (12V AC) voltage only
[2] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

[3] Includes 25° and 60° lens in the box
[4] 90° Frosted Reflector

[5] 120 inch field cuttable cable
[6] Stem is not field cuttable

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | DAMP LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE



6″ Pendant Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes
- Available with 120″ Field Cuttable Cable or Stems (12″, 24″, 36″, 48″, 60″, 72″, and 84″)
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K Tunable White option with range of 4000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025 Compliant
- 30° MAX. tilt (E629P Adjustable Pendant Series Only)

Standard Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E648P 6″ Fixed **E629P** 6″ Adjustable tilt up to 35°, 359° rotation	**W** All White **B** All Black	**-03**[1,2] 350 lm (5W) **-07** 750 lm (10.5W) **-09** 950 lm (10.5W) **-11** 1150 lm (12.5W) **-13** 1350 lm (12.5W) **-15** 1500 lm (14.7W) **-18** 1800 lm (18.9W) **-20**[3] 2000 lm (21W) **-25**[3,4] 2500 lm (23W) **-30**[3,4] 3000 lm (29W) **-35**[3,4] 3500 lm (32W) **-08**[1] 825 lm (10.5W) **-10**[1] 1000 lm (12.5W)	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[5,6] Sunset **HC**[1,7,8] Human Centric **AMD**[9,10] Amber **CT5**[1,11] 2700K-5000K	**(Blank)** 120V, Triac/ELV **D** 120-277V, 0-10V/Triac/ELV Dims to 1%	**(Blank)**[12] 38° **-S** 18° **-N** 25° **-W** 60° **-T**[1,13] 10° **-E**[14] 90°	**(Blank)**[15] 120″ Cable Mount **-12**[16] 12″ Stem **-24**[16] 24″ Stem **-36**[16] 36″ Stem **-48**[16] 48″ Stem **-60**[16] 60″ Stem **-72**[16] 72″ Stem **-84**[16] 84″ Stem

Example: **E648PW-0930-W-12** [6″ Koto™ Sylo Fixed Pendant, All White, 950 lumens, 3000K, 120V Triac/ELV, 60° Beam Angle, 12″ Stem]

[1] Available as 120V, Triac/ELV only
[2] Available in 2400K, 2700K & 3000K color temperature only
[3] Available with 2700K, 3000K, 3500K, & 4000K Color Temperature only
[4] Available as 120/277V, 0-10V/Triac/ELV only
[5] Available in -09, -11, -13, & -15 lumen outputs
[6] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[7] Available with 1150 lumen (-11) outputs only
[8] Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[9] Turtle friendly
[10] Available with -03, -07, -09 and -11 lumen outputs only
[11] Available with -08 and -10 lumen outputs only
[12] Includes 25° and 60° lens in the box
[13] Available with 350 and 750 lumen, 2700K and 3000K options only
[14] 90° Frosted Reflector
[15] 120 inch field cuttable cable
[16] Stem is not field cuttable



DALI-2 DT8 Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E648P 6″ Fixed **E629P** 6″ Adjustable tilt up to 35°, 359° rotation	**W** All White **B** All Black	**-08** 880 lm (11.5W)	**4T** Tunable White 4000K-1800K	**A** DALI-2 DT8, 120-277V, Dims to 0.1%	**(Blank)**[1] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[2] 90°	**(Blank)**[3] 120″ Cable Mount **-12**[4] 12″ Stem **-24**[4] 24″ Stem **-36**[4] 36″ Stem **-48**[4] 48″ Stem **-60**[4] 60″ Stem **-72**[4] 72″ Stem **-84**[4] 84″ Stem

Example: **E629PB-084TA-W-36** [6″ DALI-2 DT8 Koto™ Sylo Adjustable Pendant, All Black, 880 lumens, Tunable White 4000K-1800K, Dali 2, 120-277V Dims to 0.1%, 60° Beam Angle, 36″ Stem]

[1] Includes 25° and 60° lens in the box [2] 90° Frosted Reflector [3] 120 inch field cuttable cable [4] Stem is not field cuttable

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | DAMP LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE



6″ Pendant Koto™ Sylo

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 18° and 90° lenses available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- Available with 120″ Field Cuttable Cable or Stems (12″, 24″, 36″, 48″, 60″, 72″, and 84″)
- Sunset option dims from 3000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025 Compliant
- 30° MAX. tilt (E629P Adjustable Pendant Series Only)

Koto™ Focus Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle	Length
E648P 6″ Fixed **E629P** 6″ Adjustable tilt up to 35°, 359° rotation	**W** All White **B** All Black	**-07** 750 lm (10.5W) **-09** 950 lm (12.5W) **-12** 1250 lm (16.8W)	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1,2] Sunset	**(Blank)** 120V, Triac/ELV **D** 120-277V, 0-10V/Triac/ELV, Dims to 1%	**- FC**[3] 18° - 50°	**(Blank)**[4] 120″ Cable Mount **-12**[5] 12″ Stem **-24**[5] 24″ Stem **-36**[5] 36″ Stem **-48**[5] 48″ Stem **-60**[5] 60″ Stem **-72**[5] 72″ Stem **-84**[5] 84″ Stem

Example: **E648PW-0927-FC-60** [6″ Koto™ Focus Sylo Fixed Pendant, All White, 950 lumens, 2700K, 120V,Triac/ELV, 18°-50° Beam Angle, 60″ Stem]

[1] Available as 120V, Triac/ELV only
[2] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[3] **Adjustable Focus** offers 18°-50° with a twist of the snoot. Koto™ Focus LED Module includes white snoot installed on module and field changeable black snoot. Not compatible with lens accessories.
[4] 120 inch field cuttable cable
[5] Stem is not field cuttable



Low Voltage Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle	Length
E648P 6″ Fixed **E629P** 6″ Adjustable tilt up to 30°, 359° rotation	**W** All White **B** All Black	**-08** 800 lm (9W-10W)	**12A** 12V AC **24D** 24V DC	**27** 2700K **30** 3000K **SD**[1,2] Sunset	**(Blank)**[3] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[4] 90°	**(Blank)**[5] 120″ Cable Mount **-12**[6] 12″ Stem **-24**[6] 24″ Stem **-36**[6] 36″ Stem **-48**[6] 48″ Stem **-60**[6] 60″ Stem **-72**[6] 72″ Stem **-84**[6] 84″ Stem

Example: **E629PB-0812A30-N-36** [6″ Low Voltage Koto™ Sylo Adjustable Pendant, All Black, 800 lumens, 12V AC, 3000K, 25° Beam Angle, 36″ Stem]

[1] Available in 12A (12V AC) voltage only
[2] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[3] Includes 25° and 60° lens in the box
[4] 90° Frosted Reflector
[5] 120 inch field cuttable cable
[6] Stem is not field cuttable

The **Koto™ Sylo** System

2″ Aperture Fixtures with Twist-On System



95+ CRI | WET LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

2″ Direct Mount Koto™ Sylo



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Directly mounts into ceiling (Up to 1.5″ ceiling thickness)
- Optional mounting frame (E1LF1)
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K Tunable White option with range of 4000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025 Compliant
- 120V Triac/ELV with standard module options
- 120/277V 0-10V/Triac/ELV with DX module (-10DX Series)



Standard Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle
E25D 2″ Direct Mount	**W** All White **B** All Black **S** All Silver	**-03**[1] 350 lm (5W) **-07** 750 lm (10.5W) **-09** 950 lm (10.5W) **-11** 1150 lm (12.5W) **-13** 1350 lm (12.5W)	**(Blank)** 120V Triac/ELV	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[2,3] Sunset **HC**[4,5] Human Centric	**(Blank)**[6] 38° **-S** 18° **-N** 25° **-W** 60° **-T**[7] 10° **-E**[8] 90°
		-08 825 lm (10.5W) **-10** 1000 lm (12.5W)	**(Blank)** 120V Triac/ELV	**CT5** 2700K - 5000K	

Example: **E25DW-0724-S** [2″ Koto™ Sylo Direct Surface Mount, All White, 750 lumens, 120V Triac/ELV, 2400K, 18° Beam Angle]

[1] Available in 2400K, 2700K & 3000K Color Temperature only
[2] Available in -09 & -11 lumen outputs only
[3] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[4] Available with 1150 lumen (-11) output only
[5] Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[6] Includes 25° and 60° lens in the box
[7] Available with 350 (-03) & 750 lumen (-07), 2700K & 3000K options only
[8] 90° Frosted Reflector



0-10V/Triac/ELV Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle
E25D 2″ Direct Mount	**W** All White **B** All Black **S** All Silver	**-10** 1000 lm (11.8W)	**DX** 120-277V, 0-10V/ Triac/ELV Dims to 1%	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1] Sunset	**(Blank)**[2] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[3] 90°

Example: **E25DB -10DX27-N** [2″ 0-10V Triac/ELV Koto™ Sylo Direct Surface Mount, All Black, 1000 lumens, 120-277V, 0-10V/Triac/ELV,Dims to 1%, 2700K, 25° Angle Beam]

[1] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[2] Includes 25° and 60° lens in the box
[3] 90° Frosted Reflector



DALI-2 DT8 Koto™ Module Product Number Builder

Style	Finish	Module	Voltage	Color Temperature	Beam Angle
E25D 2″ Direct Mount	**W** All White **B** All Black **S** All Silver	**-08** 880 lm (11.5W)	**A** DALI-2 DT8, 120-277V, Dims to 0.1%	**4T** Tunable White 4000K-1800K	**(Blank)**[1] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[2] 90°

Example: **E25DS-08A4T** [2″ DALI-2 DT8 Koto™ Sylo Direct Surface Mount, All Silver, 880 lumens, DALI-2 DT8, 120-277V, Dims to 0.1%, Tunable White 4000K-1800K, 38° Beam Angle]

[1] Includes 25° and 60° lens in the box
[2] 90° Frosted Reflector

The **Koto™ Sylo** System

2" Aperture Fixtures with Twist-On System



95+ CRI | WET LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

3" Direct Mount Koto™ Sylo



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Directly mounts into ceiling (Up to 1.5" ceiling thickness)
- Optional mounting frame (E1LF1)
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K Tunable White option with range of 4000K to 1800K.
- Energy Star Compliant. Title 24 JA8-2025Compliant
- 120V Triac/ELV with standard module options
- 120/277V 0-10V/Triac/ELV



Standard Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E36D 3" Direct Mount	**W** All White **B** All Black **S** All Silver	**-03**[1,2] 350 lm (5W) **-07** 750 lm (10.5W) **-09** 950 lm (10.5W) **-11** 1150 lm (12.5W) **-13** 1350 lm (12.5W) **-15** 1500 lm (14.7W) **-18** 1800 lm (18.9W) **-08**[1] 825 lm (10.5W) **-10**[1] 1000 lm (12.5W)	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[3,4] Sunset **HC**[1,5,6] Human Centric **AMD**[7,8] Amber **CT5**[9] 2700K - 5000K	**(Blank)** 120V, Triac/ELV **D** 120-277V, 0-10V/Triac/ELV, Dims to 1%	**(Blank)**[10] 38° **-S** 18° **-N** 25° **-W** 60° **-T**[1,11] 10° **-E**[12] 90°

Example: **E36DW-0727-S** [3" Koto™ Sylo Direct Surface Mount, All White, 750 lumens, 2700K, 120V, Triac/ELV, 18° Beam Angle]

[1] Available as 120V, Triac/ELV only
[2] Available in 2400K, 2700K & 3000K color temperature only
[3] Available in -09, -11, -13, & -15 lumen outputs
[4] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[5] Available with 1150 lumen (-11) output only
[6] Human Centric, Dim to Warm technology, automatically transitions from 4000K to 2200K when dimmed
[7] Turtle friendly
[8] Available with -03, -07, -09 and -11 lumen outputs only
[9] Available with -08 and -10 lumen outputs only
[10] Includes 25° and 60° lens in the box
[11] Available with 350 and 750 lumen, 2700K and 3000K options only
[12] 90° Frosted Reflector



DALI-2 DT8 Koto™ Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E36D 3" Direct Mount	**W** All White **B** All Black **S** All Silver	**-08** 880 lm (11.5W)	**4T** Tunable White 4000K-1800K	**A** DALI-2 DT8 120-277V, Dims to 0.1%	**(Blank)**[1] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[2] 90°

Example: **E36DB-084TA** [3" DALI-2 DT8 Koto™ Sylo Direct Surface Mount, All Black, 880 lumens, Tunable White 4000K-1800K, DALI-2 DT8, 120-277V Dims to 0.1%, 38° Beam Angle]

[1] Includes 25° and 60° lens in the box [2] 90° Frosted Reflector



Koto™ Focus Module Product Number Builder

Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E36D 3" Direct Mount	**W** All White **B** All Black **S** All Silver	**-07** 750 lm (10.5W) **-09** 950 lm (12.5W) **-12** 1250 lm (16.8W)	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1,2] Sunset	**(Blank)** 120V, Triac/ELV **D** 120-277V, 0-10V/Triac/ELV, Dims to 0.1%	**-FC**[3] 18° - 50°

Example: **E36DS-0730-FC** [3" Koto™ Focus Sylo Direct Surface Mount, All Silver, 750 lumens, 3000K, 120V, Triac/ELV, 18° -50° Beam Angle]

[1] Available as 750 lumen (-07) output, 120V, Triac/ELV only [2] Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed
[3] **Adjustable Focus** offers 18°-50° with a twist of the snoot. Koto™ Focus LED Module includes white snoot installed on module and field changeable black snoot. Not compatible with lens accessories.

The **Koto**™ **Sylo** System

2″ Aperture Fixtures with Twist-On System

95+ CRI | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

Mounting Frame

	Description	CAT. #	Specs
	Optional Mounting Frame	E1LF1	For use with 2″ and 3″ Koto™ Sylo Direct Mount

12V AC Transformers Optional

	Description	CAT. #	Specs
	Dimmable Transformer (No Minimum Load)	LET-60	60W, 120V Input
		LET-60-277	60W, 277V Input
		LET-60H	60W, 120V Input
	0-10V Dimmable Transformer	LET-60DX	60W, 120V, 0-10V
		LET-60DX-27	60W, 277V, 0-10V
	Miniature Dimmable Transformer	LET-75	75W, 120V Input

24V DC Drivers Optional


	Description	CAT. #	Specs
	Electronic Low Voltage Dimmable Driver	DRVE24V60W	60W, 120V Input, 24V DC
	Universal (120/277V) Dimming LED Driver	DRVU24V24WD	24W, 24V DC (1A), Triac/ELV/MLV
		DRVU24V60WD	60W, 24V DC (2.5A), Triac/ELV/MLV
	Universal (120/277V) Dimming LED Driver	DRVU24V100WD	100W, 12V DC (8A) or 24V DC (4A), Triac/ELV/MLV
	Universal (120/277V) Dimming LED Driver	DRVU24V200WD	200W, 24V DC (8A), Triac/ELV/MLV
	Universal (120/277V) Dimming LED Driver	DRVU24V300WD	300W, 24V DC (12A), Triac/ELV/MLV

The **Koto™ Sylo** System

2" Aperture Fixtures with Twist-On System

95+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

Accessories Field Changeable

Description		CAT. #	Specs
	Field Changeable Lens	EP731C	18° Lens
		EP732C	25° Lens
		EP733C	38° Lens
		EP734C	60° Lens
		EP739C	90° Lens
	Field Changeable Secondary Optic Hex Louver	L45	Black, for a better glare shield
		L57	White, for a better glare shield
	Field Changeable Secondary Optic Linear Lens	L46	For a wide rectangular illumination pattern
	Field Changeable Secondary Optic Spread Lens	L47	For a symmetrical broadening of light beams
	Field Changeable Secondary Optic Frosted Diffuser	L49	For a frosted lens look
	Field Changeable Secondary Optic Color Shifter	L51	For a reduced color temperature
	Field Changeable Secondary Optic Color Lens	L52	Blue lens
		L53	Pink lens
	Asymmetric Lens	L54	Single elliptical illumination pattern
		L55	Double elliptical illumination pattern for accent lighting
	Snoot for Koto™ Modules	L50W	White
		L50B	Black

The **Ply Sylo**™

Fixtures with Ply™ LED Inserts

WITH MANUAL COLOR TEMPERATURE & LUMEN OUTPUT SWITCH



SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
4″ 6″	Surface Mount Pendant	White Black Haze	800 lm to 2000 lm	2700K - 5000K

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The **Ply Sylo**™ System

4″ & 6″ Surface Mount LED Fixtures

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

NEW!

4″ & 6″ Surface Mount Ply Sylo™



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Manual switch to choose desired Color Temperature and Lumen Output
- 120V Triac/ELV dimming or 120/277V 0-10V dimming options available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- 90+ CRI for extremely accurate color rendering
- Energy Star Compliant. Title 24 JA8-2022 Compliant

Standard Ply™ Module Product Number Builder

Ply Sylo™	Dimming	Lumen Output	Color Temperature	Finish	Optional
ESF4 4″ Surface Mount	**27** 120V, Triac/ELV[1,2] **75** 120/277V 0-10V/Triac/ELV[3,4]	**L3** Switch up to 1500 lm[5] **10** 1000 lm[6,7]	**CT5** 2700K - 5000K[8]	**W** All White **BB** All Black[9] **HW** White/Haze Reflector	**(Blank)** No Emergency Battery **EM** 15W MAX. Emergency Battery[10]

Example: **ESF42710CT5W** [4″ Ply Sylo™ Surface Mount, 1000 lumens, 2700K-5000K, All White]

[1]Available as 120V, Triac/ELV
[2]Lumen Switch: 1000/1250/1500 lm
[3]Available as 120/277V, 0-10V/Triac/ELV
[4]Lumen Switch: 800/1000/1500 lm
[5]Manual lumen switch located on module
[6]Available as 120V, Triac/ELV
[7]Available in All White (W) and White/Haze (HW) only
[8]Manual CCT switch located on module
[9]All Black (BB) only available in L3 only
[10]Fixture becomes 120V only

Standard Ply™ Module Product Number Builder

Ply Sylo™	Dimming	Lumen Output	Color Temperature	Finish	Optional
ESF6 6″ Surface Mount	**37** 120V, Triac/ELV[1] **85** 120/277V 0-10V/Triac/ELV[2]	**L3** Switch up to 2000 lm[3,4] **10** 1000 lm[5,6]	**CT5** 2700K - 5000K[7]	**W** All White **BB** All Black[8] **HW** White/Haze Reflector	**(Blank)** No Emergency Battery **EM** 15W MAX. Emergency Battery[9]

Example: **ESF63710CT5W** [6″ Ply Sylo™ Surface Mount, 1000 lumens, 2700K-5000K, All White]

[1]Available as 120V, Triac/ELV
[2]Available as 120/277V, 0-10V/Triac/ELV
[3]Manual lumen switch located on module
[4]Lumen Switch: 1000/1500/2000 lm
[5]Available as 120V, Triac/ELV
[6]Available in All White (W) and White/Haze (HW) only
[7]Manual CCT switch located on module
[8]All Black (BB) only available in L3 only
[9]Fixture becomes 120V only

The **Ply Sylo**™ System

4″ & 6″ Pendant LED Fixtures

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

NEW!

4″ & 6″ Pendant Ply Sylo™



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Manual switch to choose desired Color Temperature and Lumen Output
- 120V Triac/ELV dimming or 120/277V 0-10V dimming options available
- Compatible with: 3 ½″ and 4″ Octagon and Round Junction Boxes, and 3 ¾″ Square Junction Boxes
- 120″ Field Cuttable Cable
- 90+ CRI for extremely accurate color rendering
- Energy Star Compliant. Title 24 JA8-2022 Compliant

Standard Ply™ Module Product Number Builder

Ply Sylo™	Dimming	Lumen Output	Color Temperature	Finish	Length	Optional
EPD4 4″ Pendant	**27** 120V, Triac/ELV[1,2] **75** 120/277V 0-10V/Triac/ELV[3,4]	**L3** Switch up to 1500 lm[5] **10** 1000 lm[6,7]	**CT5** 2700K - 5000K[8]	**W** All White **BB** All Black[9] **HW** White/Haze Reflector	**(Blank)** 120″ Cable Mount[10] **-12** 12″ Stem[11] **-24** 24″ Stem[11] **-36** 36″ Stem[11] **-48** 48″ Stem[11] **-60** 60″ Stem[11] **-72** 72″ Stem[11] **-84** 84″ Stem[11]	**(Blank)** No Emergency Battery **EM** 15W MAX. Emergency Battery[12]

Example: **EPD42710CT5W** [4″ Ply Sylo™ Pendant, 1000 lumens, 2700K-5000K, All White]

[1]Available as 120V, Triac/ELV
[2]Lumen Switch: 1000/1250/1500 lm
[3]Available as 120/277V, 0-10V/Triac/ELV
[4]Lumen Switch: 800/1000/1500 lm
[5]Manual lumen switch located on module
[6]Available as 120V, Triac/ELV
[7]Available in All White (W) and White/Haze (HW) only
[8]Manual CCT switch located on module
[9]All Black (BB) only available in L3 only
[10]120″ field cuttable cable
[11]Stem not field cuttable
[12]Fixture becomes 120V only

Standard Ply™ Module Product Number Builder

Ply Sylo™	Dimming	Lumen Output	Color Temperature	Finish	Length	Optional
EPD6 6″ Pendant	**37** 120V, Triac/ELV[1] **85** 120/277V 0-10V/Triac/ELV[2]	**L3** Switch up to 2000 lm[3,4] **10** 1000 lm[5,6]	**CT5** 2700K - 5000K[7]	**W** All White **BB** All Black[8] **HW** White/Haze Reflector	**(Blank)** 120″ Cable Mount[9] **-12** 12″ Stem[10] **-24** 24″ Stem[10] **-36** 36″ Stem[10] **-48** 48″ Stem[10] **-60** 60″ Stem[10] **-72** 72″ Stem[10] **-84** 84″ Stem[10]	**(Blank)** No Emergency Battery **EM** 15W MAX. Emergency Battery[11]

Example: **EPD63710CT5W** [6″ Ply Sylo™ Pendant, 1000 lumens, 2700K-5000K, All White]

[1]Available as 120V, Triac/ELV
[2]Available as 120/277V, 0-10V/Triac/ELV
[3]Manual lumen switch located on module
[4]Lumen Switch: 1000/1500/2000 lm
[5]Available as 120V, Triac/ELV
[6]Available in All White (W) and White/Haze (HW) only
[7]Manual CCT switch located on module
[8]All Black (BB) only available in L3 only
[9]120″ field cuttable cable
[10]Stem not field cuttable
[12]Fixture becomes 120V only

Ceiling Mount Fixtures





120V LED SKY Panels™	236
Darby™ & Dustin™ Ceiling Mount LED Lights	237

Ceiling Mount **Fixtures**

Sky Panels™ & LED Disk Lights

DIMMABLE | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED | 93+ CRI

Junction Box for Ceiling Mount Fixtures

	Description	CAT. #	Specs
	Square New Construction Box	ELJ4S	3 ¾″ Sq x 2 ⅜″
	Junction Box without Hanger Bars	ELJ332	3 ¾″ Sq x 2 ⅜″
	A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714		
	Square Junction Box with Hanger Bars for 2-Hour Fire Rated Ceilings	EJB44ICA	IC Airtight for use in IC & Non-IC Applications. 4″ Sq x 3 ½″ H
	Non-IC New Construction Junction Box with Emergency LED Driver	KEM-LDJB1	For use in Non-IC Applications. 4″ Sq x 3 ½″ H
	Junction Box without Hanger Bars for 2-Hour Fire Rated Ceilings	ELJ443	IC Airtight for use in IC & Non-IC Applications. 4″ Sq x 3 ½″ H

Sky Panels™ LED Edge Lit

	Description	CAT. #	Specs
	4″ Round Sky Panel™ 5 ⅜″ O.D. - ⅝″ H	ELSP43CT5W	White, 10W, 600 lm, 2700K - 5000K
		ELSP43CT5B	Black, 10W, 600 lm, 2700K - 5000K
	4″ Square Sky Panel™ 4 ⅜″ Sq. - ⅝″ H	ELSP4430W	White, 10W, 600 lm, 3000K
		ELSP4430B	Black, 10W, 600 lm, 3000K
	6″ Round Sky Panel™ 7 ⅞″ O.D. - ⅝″ H	ELSP63CT5W	White, 15W, 900 lm, 2700K - 5000K
		ELSP63CT5B	Black, 15W, 900 lm, 2700K - 5000K
	6″ Square Sky Panel™ 6 ⅜″ Sq. - ⅝″ H	ELSP66CT5W	White, 15W, 900 lm, 2700K - 5000K
		ELSP66CT5B	Black, 15W, 900 lm, 2700K - 5000K
	8″ Round Sky Panel™ 9″ O.D. - ⅝″ H	ELSP83CT5W	White, 18W, 1200 lm, 2700K - 5000K
		ELSP83CT5B	Black, 18W, 1200 lm, 2700K - 5000K
	8″ Square SkyPanel™ 9″ Sq. - ⅝″ H	ELSP88CT5W	White, 18W, 1200 lm, 2700K - 5000K
		ELSP88CT5B	Black, 18W, 1200 lm, 2700K - 5000K
	12″ Round SkyPanel™ 12″ O.D. - ⅝″ H	ELSP12CT5W	White, 22W, 1450 lm, 2700K - 5000K
		ELSP12CT5B	Black, 22W, 1450 lm, 2700K - 5000K
	12″ Square SkyPanel™ 12″ Sq. - ⅝″ H	ELSP22CT5W	White, 22W, 1450 lm, 2700K - 5000K
		ELSP22CT5B	Black, 22W, 1450 lm, 2700K - 5000K

Ceiling Mount **Fixtures**

Sky Panels™ & LED Disk Lights

DIMMABLE · IN TODAY OUT TODAY · 50,000 HOURS · 5 YEAR WARRANTY · INTEGRATED LED · 93+ CRI

Darby™ LED Ceiling Lights



10″ - 16″ HIGHLUMEN Double Ring Ceiling Light

10″ - 9 ⅞″ O.D. - 2 ¾″ H
12″ - 12 ⅛″ O.D. - 3 ⅜″ H
14″ - 14 ⅛″ O.D. - 3 ¾″ H
16″ - 16 ⅛″ O.D. - 4 ⅜″ H

DAMP LOCATION

CCT SWITCH

CCT SWITCH

Description	CAT. #	Specs
	ELD11030W	Nickel, 10″, 14W, 980 lm, 3000K
	ELD11040W	Nickel, 10″, 14W, 1010 lm, 4000K
	ELD21030W	Nickel, 10″, 18W, 1170 lm, 3000K
	ELD21030BZ	Bronze, 10″, 18W, 1170 lm, 3000K
	ELD21040W	Nickel, 10″, 18W, 1260 lm, 4000K
	ELD21040BZ	Bronze, 10″, 18W, 1260 lm, 4000K
	ELD21230BZ	Bronze, 12″, 22W, 1430 lm, 3000K
	ELD21240BZ	Bronze, 12″, 22W, 1550 lm, 4000K
	ELD14CT5W	Nickel, 14″, 18W, 1800 lm, 2700K - 5000K
	ELD16CT5W	Nickel, 16″, 22W, 2200 lm, 2700K - 5000K

Dustin™ LED Ceiling Lights

12″ - 16″ HIGHLUMEN Ceiling Light

12″ - 12 ⅛″ O.D. - 3 ⅜″ H
14″ - 14 ⅛″ O.D. - 3 ¾″ H
16″ - 16 ⅛″ O.D. - 4 ⅜″ H

DAMP LOCATION

Description	CAT. #	Specs
	ELD32230W	12″, 22W, 1540 lm, 3000K
	ELD32240W	12″, 22W, 1540 lm, 4000K
	ELD31430W	14″, 18W, 1260 lm, 3000K
	ELD31440W	14″, 18W, 1260 lm, 4000K
	ELD32630W	16″, 30W, 2100 lm, 3000K
	ELD32640W	16″, 30W, 2100 lm, 4000K

Track & **Pendant** Lighting



Integrated LED Track Heads	239
Integrated LED Wall Wash	242
MR16 Low Voltage Track Heads for LED or Halogen Lamps	243
MR16 GU10 Line Voltage Track Heads	246
120V Line Voltage Track Fixtures	247
Single & Two Circuit Track and Accessories	250
LED Pendants	255
Line and Low Voltage Pendants & Accessories	256

Track **Heads**

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip

IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED | 93+ CRI

Integrated LED Track Heads

	Description		CAT. #	Specs
	LED Clove II™ 4 ½″ L - 2 ¼″ W - 5 ¼″ H	38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET578L30W	White, 14W, 1075 lm, 3000K. 90° tilt, 358° rotation
			ET578L30B	Black, 14W, 1075 lm, 3000K
	LED Transom™ 3 ⅜″ L - 2 ½″ W - 4 ¾″ H	38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET612DW	White, 10W, 800 lm, 3000K, 180° tilt, 358° rotation
			ET612DB	Black, 10W, 800 lm, 3000K
	HIGHLUMEN LED Transom 4 ⅝″ L - 3 ¼″ W - 6 ⅛″ H	38° Beam angle standard. Optional lenses: EP722C (15°) or EP723C (24°) available	ET613DW	White, 17W, 1500 lm, 3000K 180° tilt, 358° rotation
			ET613DB	Black, 17W, 1500 lm, 3000K
			ET613-35DB	Black, 17W, 1500 lm, 3500K
	LED Trilene™ 3 ⅞″ L - 4 ⅜″ H	38° Beam angle standard. Optional lenses: EP726C (15°) or EP727C (24°) available CCT SWITCH	ET615CT5DW	White, 17W, 1300 lm, 2700K - 5000K 180° tilt, 358° rotation
			ET615CT5DB	Black, 17W, 1300 lm, 2700K - 5000K
	LED Stein™ 3 ¾″ L - 2 ¼″ W - 4 ¾″ H	38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available CCT SWITCH	ET616-27DW	White, 10W, 800 lm, 2700K
			ET616-27DB	Black, 10W, 800 lm, 2700K
			ET616CT5DW	White, 10W, 800 lm, 2700K - 5000K
			ET616CT5DB	Black, 10W, 800 lm, 2700K - 5000K
	HIGHLUMEN LED Stein™ 4 ⅛″ L - 2 ⅞″ W - 5 ⅝″ H	38° Beam angle standard. Optional lenses: EP722C (15°) or EP723C (24°) available CCT SWITCH	ET617CT5DW	White, 20W, 1500 lm, 2700K - 5000K
			ET617CT5DB	Black, 20W, 1500 lm, 2700K - 5000K
	LED Stein™ with 5-CCT & 3-Wattage Switch 5 ⅜″ L - 2 ⅜″ W - 8 ¼″ H	Includes 38° standard beam angle, and field changeable 60° lens 3 WATTAGE SWITCH CCT SWITCH	ET843CT5W	White, 20W - 36W, 2050 lm - 3050 lm, 2700K, 3000K, 3500K, 4000K, 5000K
			ET843CT5B	Black, 20W - 36W, 2050 lm - 3050 lm, 2700K, 3000K, 3500K, 4000K, 5000K

For our full line of Track and Track accessories **visit elcolighting.com**

Track **Heads**

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip

IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | 5YR 5 YEAR WARRANTY | INTEGRATED LED | 93+ CRI

Integrated LED Track Heads

	Description		CAT. #	Specs
	LED Packer™ with 5-CCT & 3-Watt Switch (S) 3 ¾″ L - 2 ⅝″ W - 6 ⅜″ W	Includes 36° standard beam angle, and field changeable 24° lens 3 WATTAGE SWITCH CCT SWITCH	ET830CT5W	White, 7W - 14W, 650 lm - 1250 lm, 2700K - 5000K, 90° tilt, 358° rotation
			ET830CT5B	Black, 7W - 14W, 650 lm - 1250 lm, 2700K - 5000K
	LED Packer™ with 5-CCT & 3-Watt Switch (M) 4 ⅛″ L - 3″ W - 6 ⅞″ H	Includes 36° standard beam angle, and field changeable 24° lens 3 WATTAGE SWITCH CCT SWITCH	ET831CT5W	White, 10W - 20W, 925 lm - 1750 lm, 2700K - 5000K, 90° tilt, 358° rotation
			ET831CT5B	Black, 10W - 20W, 925 lm - 1750 lm, 2700K - 5000K
	LED Packer™ with 5-CCT & 3-Watt Switch (L) 4 ¾″ L - 3 ⅜″ W - 7 ¾″ H	Includes 36° standard beam angle, and field changeable 60° lens 3 WATTAGE SWITCH CCT SWITCH	ET832CT5W	White, 20W - 28W, 1750 lm - 2375 lm, 2700K - 5000K, 90° tilt, 358° rotation
			ET832CT5B	Black, 20W - 28W, 1750 lm - 2375 lm, 2700K - 5000K
	LED Packer™ with 5-CCT & 3-Watt Switch (XL) 5 ⅜″ L - 3 ⅜″ W - 8 ¼″ H	Includes 36° standard beam angle, and field changeable 60° lens 3 WATTAGE SWITCH CCT SWITCH	ET833CT5W	White, 24W - 36W, 2075 lm - 3075 lm, 2700K - 5000K, 90° tilt, 358° rotation
			ET833CT5B	Black, 24W - 36W, 2075 lm - 3075 lm, 2700K - 5000K
	LED Bachman™ Field Adjustable 20°-50° Beam Angle 3 9⁄16″ L - 3 ½″ W - 6 ⅜″ H		ET75830DW	White, 20W, 1600 lm, 3000K, Adjustable Beam Angle, 180° tilt, 358° rotation
	LED Bachman™ Field Adjustable 20°-50° Beam Angle 6 ⅝″ L - 2 ⅞″ W	CCT SWITCH	ET758CT5DW	White, 20W, 1700 lm, 2700K - 5000K Adjustable Beam Angle, 180° tilt, 358° rotation
			ET758CT5DB	Black, 20W, 1700 lm, 2700K - 5000K Adjustable Beam Angle
	LED Cleat™ 3 ⅛″ L - 2 ¼″ W - 4 ⅛″ H	38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET62530DW	White, 10W, 700 lm, 3000K, 180° tilt, 358° rotation
			ET62530DB	Black, 10W, 700 lm, 3000K
			ET62630DW	White, 13W, 1000 lm, 3000K
			ET62630DB	Black, 13W, 1000 lm, 3000K
	LED Cleat™ Monopoint 1 ⅝″ L - 2 ¼″ W - 2 ⅝″ H 5″ O.D.	38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available CCT SWITCH	ET579CT5W	White, 10W, 730 lm, 2700K - 5000K 180° tilt, 358° rotation
			ET579CT5B	Black, 10W, 730 lm, 2700K - 5000K

For our full line of Track and Track accessories **visit elcolighting.com**

Track **Heads**

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED

Integrated LED Track Heads

	Description		CAT. #	Specs
	LED Gordian™ (Mini) 1 ½″ L - 1 ½″ W - 3 7⁄16″ H	38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET618CT5DW	White, 10W, 750 lm, 2700K - 5000K
			ET618CT5DB	Black, 10W, 750 lm, 2700K - 5000K
	LED Gordian™ (S) 2 ¼″ L - 2 ¼″ W - 4 ¾″ H	38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET619CT5DW	White, 20W, 1150 lm, 2700K - 5000K
			ET619CT5DB	Black, 20W, 1150 lm, 2700K - 5000K
	HIGHLUMEN LED Gordian™ (M) 3 ¼″ L - 3 3⁄16″ W - 5 3⁄8″ H	38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET620CT5DW	White, 30W, 2200 lm, 2700K - 5000K
			ET620CT5DB	Black, 30W, 2200 lm, 2700K - 5000K
	HIGHLUMEN LED Gordian™ (L) 3 5⁄8″ L - 3 5⁄8″ W - 6 ¼″ H	38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET621CT5DW	White, 40W, 3050 lm, 2700K - 5000K 180° tilt, 358° rotation
			ET621CT5DB	Black, 40W, 3050 lm, 2700K - 5000K
	LED Tiggap™ 3 9⁄16″ L - 2 ½″ W - 4 ¼″ H	38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET62830DW	White, 13W, 1000 lm, 3000K 90° tilt, 358° rotation
	LED Trident™ 3 11⁄16″ L - 2 3⁄16″ W - 5 7⁄8″ H	36° Beam angle standard.	ET814CT5W	White, 12W, 800 lm, 2700K - 5000K, 90° tilt, 358° rotation
			ET814CT5B	Black, 12W, 800 lm, 2700K - 5000K, 90° tilt, 358° rotation
	LED Trident™ 4 13⁄16″ L - 2 7⁄8″ W - 7 3⁄8″ H	36° Beam angle standard.	ET815CT5W	White, 20W, 1250 lm, 2700K - 5000K, 90° tilt, 358° rotation
			ET815CT5B	Black, 20W, 1250 lm, 2700K - 5000K, 90° tilt, 358° rotation

For our full line of Track and Track accessories **visit elcolighting.com**

Track **Heads**

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED

Integrated LED Wall Wash Track Fixtures

	Description		CAT. #	Specs
	LED Pipe™ (6″) 6″ L - 3″ W - 4 ¾″ H	CCT SWITCH	ETW46CT3W	White, 14W, 1000 lm,3000K, 3500K, 4000K 180° tilt, 358° rotation
			ETW46CT3B	Black, 14W, 1000 lm, 3000K, 3500K, 4000K
	LED Pipe™ (12″) 11 ⅝″ L - 3″ W - 4 ¾″ H	CCT SWITCH	ETW42CT5W	White, 20W, 1550 lm, 2700K - 5000K 180° tilt, 358° rotation
			ETW42CT5B	Black, 20W, 1550 lm, 2700K - 5000K
			ETW42CT5B-J	Black, 20W, 1550 lm, With Junto Tip, 2700K - 5000K
	LED Pipe™ (21″) 20 ¼″ L - 3″ W - 4 ¾″ H	CCT SWITCH	ETW43CT5W	White, 40W, 2500 lm, 2700K - 5000K 180° tilt, 358° rotation
			ETW43CT5B	Black, 40W, 2500 lm, 2700K - 5000K
	LED Pipe™ (27″) 26 ⅛″ L - 3″ W - 4 ¾″ H	CCT SWITCH	ETW44CT5W	White, 58W, 4000 lm, 2700K - 5000K 180° tilt, 358° rotation
			ETW44CT5B	Black, 58W, 4000 lm, 2700K - 5000K
	LED Boom™ with 5-CCT & 3-Wattage Switch 5 ⅞″ L - 2 ¾″ W - 5 ⅞″ H	CCT SWITCH 3 WATTAGE SWITCH	ETW663CT5W	White, 24W - 36W, 2275 lm - 3350 lm, 2700K - 5000K, 180° tilt, 358° rotation
			ETW663CT5B	Black, 24W - 36W, 2275 lm - 3350 lm, 2700K - 5000K

Integrated LED Linear Track Fixtures


	Description		CAT. #	Specs
			ETL2130W	White, 18W, 1400 lm, 3000K
	LED Tarbuck™ 22 ½″ L - 1 ½″ W - 1 ½″ H	CCT SWITCH	ETL21CT3B	Black, 18W, 1400 lm, 3000K, 3500K, 4000K
			ETL2140W	White, 18W, 1500 lm, 4000K
			ETL21CT5W	White, 12W, 20W, 28W, 1500 lm, 2700K, 3000K, 3500K, 4000K, 5000K

For our full line of Track and Track accessories **visit elcolighting.com**


Track **Heads**

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip





Architectural Flood/Wall Wash Biax Series Track Fixtures

	Description	CAT. #	Specs
	Flood Wall Wash 17 ⅝″ L - 5 ⅝″ W - 8 ¼″ H	ET226B	Black, 3600 lm, 24/27W biax lamps

MR16 Low Voltage Track Heads *for LED or Halogen Lamps*


	Description	CAT. #	Specs
	Low Voltage Zeppelin™ for LED or Halogen MR16 BiPin 2 ⅛″ L - 2″ W - 5 ⅛″ H	ETLD526W	White, 120V - 50W MAX. 90° tilt, 358° rotation
		ETLD526B	Black, 120V - 50W MAX.
	Low Voltage Cylinder for LED or Halogen MR16 BiPin 3 ⅛″ L - 2 ¼″ W - 5 ¾″ H	ETLD528W	White, 120V - 50W MAX. 90° tilt, 358° rotation
		ETLD528B	Black, 120V - 50W MAX.
		ETLD528BZ	Bronze, 120V - 50W MAX.
	Low Voltage Anchor™ for LED or Halogen MR16 BiPin 4″ L - 2 ½″ W - 5 ¾″ H	ETLD530WW	All White, 120V, 3W - 50W MAX. 90° tilt, 358° rotation
		ETLD530W	White/Black, 120V, 3W - 50W MAX.
		ETLD530B	Black, 120V, 3W - 50W MAX.
	Low Voltage Icicle™ for LED or Halogen MR16 BiPin 3″ L - 2 ⅞″ W - 7 ¼″ H	ETLD534W	White, 120V, 50W MAX. 90° tilt, 358° rotation

For our full line of Track and Track accessories **visit elcolighting.com**

Track **Heads**

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip





MR16 Low Voltage Track Heads *for Halogen Lamps*


	Description	CAT. #	Specs
	Gimbal Ring for Halogen MR16 BiPin 2 ¾″ L - 2 ⅛″ W - 5 ¼″ H	ET507B	Black, 12V, 50W MAX.
	Low Voltage Zeppelin™ MR16 BiPin 2″ L - 2 ⅛″ W - 4 ⅜″ H	ET526W	White, 12V, 50W MAX.
		ET526B	Black, 12V, 50W MAX.
		ET526-75W	White, 12V, 75W MAX.
		ET526-75B	Black, 12V, 75W MAX.
	Low Voltage Cylinder MR16 BiPin 3″ L - 2 ¼″ W - 5″ H	ET528W	White, 12V, 50W MAX.
		ET528B	Black, 12V, 50W MAX.
		ET528G	Gold, 12V, 50W MAX.
		ET528N	Nickel, 12V, 50W MAX.
	Low Voltage Anchor™ MR16 BiPin 3″ L - 2 ½″ W - 5″ H	ET530W	White/Black Baffle, 120V, 50W MAX.
		ET530B	Black, 120V, 50W MAX.
		ET530WW	All White, 120V, 50W MAX.
	Low Voltage Step Cylinder MR16 BiPin 3 ½″ L - 2 ½″ W - 6″ H	ET531B	Black, 12V, 42/50W MAX.
	Low Voltage Hoxton™ MR16 BiPin 3 ⅛″ L - 2 ¼″ W - 5″ H	ET532W	White, 12V, 50W MAX.
		ET532B	Black, 12V, 50W MAX.
	Low Voltage Louver MR16 BiPin 3 ⅛″ L - 2 ¾″ W - 5 ¼″ H	ET537B	Black, 12V, 50W MAX.

For our full line of Track and Track accessories **visit elcolighting.com**

Track **Heads**

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip





MR16 Low Voltage Track Heads *for Halogen Lamps*

	Description	CAT. #	Specs
	Low Voltage Contempo MR16 BiPin 3 ⅝″ L - 2 ¼″ W - 5 ¼″ H	ET549B	Black, 12V, 42W/50W MAX.
	Low Voltage Micro Style MR16 BiPin 3 ½″ L - 2 ⅜″ W - 6 ¾″ H	ET559B	Black, 12V, 50W MAX.
	Low Voltage Vertical Gimbal MR16 BiPin 5″ L - 2 ¼″ W - 5 ¼″ H	ET562W	White, 12V, 50W MAX.
		ET562B	Black, 12V, 50W MAX.
	Low Voltage Monopoint MR16 BiPin 3″ L - 2 ¼″ W - 4 ½″ H	ET1528W	White, 12V, 50W MAX.
		ET1528B	Black, 12V, 50W MAX.

MR16 Low Voltage Track Heads with Stem Extensions

	Description	CAT. #	Specs
	Low Voltage Cylinder MR16 BiPin	ET528-24W	24″, White, 12V, 50W
		ET528-24B	24″, Black, 12V, 50W
		ET528-36W	36″, White, 12V, 50W
		ET528-36B	36″, Black, 12V, 50W

For our full line of Track and Track accessories* ***visit elcolighting.com**

Track **Heads**

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED

MR16 GU10 Line Voltage Track Heads


	Description	CAT. #	Specs
	Bowen™ GU10 MR16 3 ⅛″ L - 2 ⅛″ W - 5 ⅛″ H	ET1626W	White
		ET1626B	Black
		ET1626N	Nickel
	Garda™ GU10 MR16 3″ L - 2 ¼″ W - 5″ H	ET1628W	White
		ET1628B	Black
		ET1628BZ	Bronze
		ET1628N	Nickel
	Arbor™ GU10 MR16 3″ L - 2 ¼″ W - 5″ H	ET1630W	White/ Black Baffle
		ET1630B	Black
		ET1630WW	All White
	Crown™ GU10 MR16 3 ⅛″ L - 2 ¼″ W - 5 ⅛″ H	ET1632W	White
		ET1632B	Black
	Monopoint GU10 MR16 2 ⅜″ L - 2 ¼″ W - 4 ½″ H	ET1728W	White
		ET1728B	Black
	120V 50W Halogen MR16 GU10 Lamp	MR120-GU10	50W
	LED 120V 7W LED MR16 GU10 Lamp	MR120-GU10LD	7W, 500 lm, 3000K

For our full line of Track and Track accessories **visit elcolighting.com**

Track **Heads**

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip





120V Line Voltage Track Fixtures


	Description	CAT. #	Specs
	Gimbal Ring 4 ¾″ L - 4 ⅛″ W - 7 ¼″ H	ET630W	White, 120V, 75W PAR30
		ET630B	Black, 120V, 75W PAR30
	Gimbal Ring PAR38 5 ¾″ L - 5″ W - 9 ½″ H	ET631W	White, 120V, 150W PAR38
		ET631B	Black, 120V, 150W PAR38
	Flat Back Cylinder with Baffle 5″ L - 3 ½″ W - 7 ½″ H	ET634W	All White, 120V, 50W R20/PAR20
		ET634B	All Black, 120V, 50W R20/PAR20
		ET634WW	White/Black Baffle, 120V, 50W R20/PAR20
	Flat Back Cylinder with Baffle 7″ L - 4 ¼″ W - 9 ¾″ H	ET635W	All White, 120V, 75W R30/PAR30
		ET635B	All Black, 120V, 75W R30/PAR30
		ET635WW	White/Black Baffle, 120V, 75W R30/PAR30
	Step Cylinder with Baffle 3 ⅝″ L - 6″ W - 8 ¾″ H	ET636W	White/Black Baffle, 120V, 50W R20/PAR20
		ET636B	All Black, 120V, 50W R20/PAR20
		ET636WW	All White, 120V, 50W R20/PAR20
	Step Cylinder with Baffle 6 ½″ L - 4 ⅜″ W - 9 ½″ H	ET637W	White/Black Baffle, 120V, 75W R30/PAR30
		ET637B	All Black, 120V, 75W R30/PAR30
		ET637WW	All White, 120V, 75W R30/PAR30

For our full line of Track and Track accessories **visit elcolighting.com**

Track **Heads**

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip





120V Line Voltage Track Fixtures


	Description	CAT. #	Specs
	Universal Track Fixture 5 ¾″ L - 2″ W - 7 ½″ H	ET641W	White, 120V, 50W PAR16, PAR20 and PAR30, 150W PAR38
		ET641B	Black, 120V, 50W PAR16, PAR20 and PAR30, 150W PAR38
	Universal Track Fixture 4 ½″ L - 2″ W - 8 ¼″ H	ET642W	White, 120V, 50W PAR16, PAR20 and PAR30, 150W PAR38
		ET642B	Black, 120V, 50W PAR16, PAR20 and PAR30, 150W PAR38
	Mini Universal 2 ⅜″ L - 2″ W - 5 ¼″ H	ET647W	White, 120V, 75W R or PAR
		ET647B	Black, 120V, 75W R or PAR
		ET647BZ	Bronze, 120V, 75W R or PAR
	Flat Back Cylinder with Black or White Coilex Baffle 8″ L - 5 ⅞″ W - 9 ⅞″ H	ET650W	White w/Black Baffle, 120V, 150W R40 PAR38
		ET650WW	All White, 120V, 150W R40 PAR38
	Solid PAR20 Classic 4″ L - 3 ½″ W - 5½″ H	ET657W	White, 120V, 50W PAR20
		ET657B	Black, 120V, 50W PAR20
	Solid PAR30 Classic 4 ⅜″ L - 4 ⅞″ W - 6 ½″ H	ET658W	White, 120V, 75W PAR30
		ET658B	Black, 120V, 75W PAR30

For our full line of Track and Track accessories **visit elcolighting.com**

Track **Heads**

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip





120V Line Voltage Track Fixtures

	Description	CAT. #	Specs
	Wall Wash with Louver 7 ¼″ L - 3 ¾″ W - 6 ¼″ H	ET660B	Black, 120V, 300W T3 double end quartz 150W T4 ETF Halogen 150W R40/PAR38
	Yoke mounted Roundback Cylinder PAR30 4 ½″ L - 4 ⅜″ W - 6 ¼″ H	ET662B	Black, 120V, 75W PAR30
	Front Loading Adjustable Gimbal PAR30 4 ¾″ L - 4 ⅛″ W - 8″ H	ET686W	White, 120V, 75W PAR30
	Front Loading Adjustable Gimbal PAR38 5 ⅛″ L - 5″ W - 9 ½″ H	ET687W	White, 120V, 150W PAR38
		ET687B	Black, 120V, 150W PAR38
	Mini Universal ½″ Yoke 2 ⅜″-3 ½″ L - 2 ⅛″ W - 4 ½″-4 ⅞″ H	ET690W	White, 120V, 50W PAR16, PAR20 and PAR30, 150W PAR38
		ET690B	Black, 120V, 50W PAR16, PAR20 and PAR30, 150W PAR38
	Par Classic PAR38 6 ¾″ L - 5 ⅜″ W - 9″ H	ET696C	Clear, 120V, 150W PAR38
		ET696G	Gold, 120V, 150W PAR38

For our full line of Track and Track accessories **visit elcolighting.com**

Single & Two **Circuit Track and Accessories**

Full line of Accessories for Track Heads

IN TODAY OUT TODAY

5YR 5 YEAR WARRANTY

Single Circuit Track *supplied with dead end and mounting hardware*

	Description	CAT. #	Specs
	Single Circuit Track Available in White (W), Black (B), Bronze (BZ) & Nickel (N) 12′ available only in White and Black	EP002 (W) (B) (BZ) (N)	2′, 120V
		EP004 (W) (B) (BZ) (N)	4′, 120V
		EP006 (W) (B) (BZ) (N)	6′, 120V
		EP008 (W) (B) (BZ) (N)	8′, 120V
	12′ Track Kit Kit Includes: (2) Single Track (EP006) & Mini Connector Track (EP808) Available in White (W), Black (B), Bronze (BZ) & Nickel (N)	EP12X (W) (B) (BZ) (N)	(2) 6′ Single Tracks, (1) Mini Connector, 120V

Single Circuit Track Accessories

	Description	CAT. #	Specs
	Live End Connector Used for direct wiring.	EP801W	White
		EP801B	Black
		EP801BZ	Bronze
		EP801N	Nickel
	Flexible Connector To join two track sections at an angle up to 90°. Can be used as a feed point	EP802W	White
		EP802B	Black
		EP802BZ	Bronze
		EP802N	Nickel
	Straight Connector Power feedable connector to join two track sections	EP803W	White
		EP803B	Black
		EP803BZ	Bronze
		EP803N	Nickel
	L Connector/Straight Connector Power feedable connector to join two track sections at a 90° or 180°	EP804W	White
		EP804B	Black
		EP804BZ	Bronze
		EP804N	Nickel
	T Connector Power feedable connector to join three track sections	EP805W	White
		EP805B	Black
		EP805BZ	Bronze
		EP805N	Nickel
	X Connector Power feedable connector to join four track sections	EP806W	White
		EP806B	Black
		EP806BZ	Bronze
		EP806N	Nickel
	Mini Connector To join two track sections. Cannot be used as a feed point	EP808W	White
		EP808B	Black
		EP808BZ	Bronze
		EP808N	Nickel
	Floating Canopy Can be used anywhere along length of track to supply power. Includes end cap	EP809W	White
		EP809B	Black
		EP809BZ	Bronze
		EP809N	Nickel
	End Feed Kit Includes live end feed and canopy to mount on outlet box	EP810W	White
		EP810B	Black
		EP810BZ	Bronze
		EP810N	Nickel
	Dead End Dead end cap for single and two circuit track	EP812W	White
		EP812B	Black
		EP812BZ	Bronze
		EP812N	Nickel
	T-Bar Ceiling Feed Live feed with outlet box for use with T-bar ceilings	EP817W	White
		EP817B	Black
		EP817BZ	Bronze
		EP817N	Nickel

Single & Two **Circuit Track and Accessories**

Full line of Accessories for Track Heads

IN TODAY OUT TODAY

5YR 5 YEAR WARRANTY

Single Circuit Track Accessories

	Description	CAT. #	Specs
	Dead Mini Connector Dead Mini Connector to join two track sections without passing the power	EP825W	White
		EP825B	Black
		EP825BZ	Bronze
		EP825N	Nickel
	T-Bar Ceiling Feed In-line T-bar ceiling feed. Available in White and Black Only	EP827W	White
		EP827B	Black
	Cord and Plug Connector For single circuit track. 10 Amp MAX. or 1200W. 12 ft. long	EP850W	White
		EP850B	Black
		EP850BZ	Bronze
		EP850N	Nickel
	Conduit Connector To start a surface run	EP880W	White
		EP880B	Black
		EP880BZ	Bronze
	Conduit Continuation Kit Kit includes: (1) left and (1) right feed, to continue around obstructions with ½" surface conduit	EP979W	White
		EP979B	Black
	Live Feed with Current Limiter For single circuit track. 1A to 12A available	EP840W-1A	White, 1 Amp
		EP840B-1A	Black, 1 Amp
		EP840BZ-1A	Bronze, 1 Amp
		EP840W-2A	White, 2.5 Amp
		EP840B-2A	Black, 2.5 Amp
		EP840BZ-2A	Bronze, 2.5 Amp
		EP840W-3A	White, 3 Amp
		EP840B-3A	Black, 3 Amp
		EP840BZ-3A	Bronze, 3 Amp
		EP840W-4A	White, 4 Amp
		EP840B-4A	Black, 4 Amp
		EP840BZ-4A	Bronze, 4 Amp
		EP840W-5A	White, 5 Amp
		EP840B-5A	Black, 5 Amp
		EP840BZ-5A	Bronze, 5 Amp
		EP840W-7A	White, 7 Amp
		EP840B-7A	Black, 7 Amp
		EP840BZ-7A	Bronze, 7 Amp
		EP840W-10A	White, 10 Amp
		EP840B-10A	Black, 10 Amp
		EP840BZ-10A	Bronze, 10 Amp
		EP840W-12A	White, 12 Amp
		EP840B-12A	Black, 12 Amp
		EP840BZ-12A	Bronze, 12 Amp
	In-Line Feed Connector with Current Limiter For single circuit track. 1A to 12A available. Available in White & Black	EP841W-1A	White, 1 Amp
		EP841B-1A	Black, 1 Amp
		EP841W-2A	White, 2.5 Amp
		EP841B-2A	Black, 2.5 Amp
		EP841W-3A	White, 3 Amp
		EP841B-3A	Black, 3 Amp
		EP841W-4A	White, 4 Amp
		EP841B-4A	Black, 4 Amp
		EP841W-5A	White, 5 Amp
		EP841B-5A	Black, 5 Amp
		EP841W-7A	White, 7 Amp
		EP841B-7A	Black, 7 Amp
		EP841W-10A	White, 10 Amp
		EP841B-10A	Black, 10 Amp
		EP841B-12A	White, 12 Amp
		EP841BZ-12A	Black, 12 Amp

Single & Two **Circuit Track and Accessories**

Full line of Accessories for Track Heads

IN TODAY OUT TODAY — 5YR 5 YEAR WARRANTY

Two Circuit Track Accessories

	Description	CAT. #	Specs
	Two Circuit Track Track supplied with dead end and mounting hardware	EC002W	White, 2′
		EC002B	Black, 2′
		EC004W	White, 4′
		EC004B	Black, 4′
		EC006W	White, 6′
		EC006B	Black, 6′
		EC008W	White, 8′
		EC008B	Black, 8′
	Live End Connector Two Circuit live end connector to start a run	EC801W	White
		EC801W	Black
	Flexible Connector Power feedable connector to join two track sections up to 90° angle	EC802W	White
		EC802B	Black
	Straight Connector Power feedable connector to join two track sections	EC803W	White
		EC803B	Black
	L Connector Power feedable connector to join two track sections at a 90° angle	EC804W	White
		EC804B	Black
	T Connector Power feedable connector to join three track sections	EC805W	White
		EC805B	Black
	X Connector Power feedable connector to join four track sections	EC806W	White
		EC806B	Black
	Mini Connector To join two track sections. Cannot be used as a feed point	EC808W	White
		EC808B	Black
	Floating Canopy Can be used anywhere along length of track to supply power. Includes end cap.	EC809W	White
		EC809B	Black
	Dead End Dead End Cap for single and two circuit track.	EP812W	White
		EP812B	Black
	Conduit Connector To start a surface run.	EC880W	White
		EC880B	Black
	T-Bar Ceiling Feed Live feed with outlet box for use with T-bar ceilings.	EC817W	White
		EC817B	Black
	Two Circuit Live-End Feed Connector with Current Limiter 1A to 12A available. Separate circuit breaker for each circuit.	EC840W	See PNB Below
		EC840B	See PNB Below
	Two Circuit In-Line Feed Connector with Current Limiter 1A to 12A available. Separate circuit breaker for each circuit.	EC841W	See PNB Below
		EC841B	See PNB Below

Product Number Builder

ELCO 2 Circuit	Feed	Finish	Circuit 1	Circuit 2
EC				
	840 Live-End Feed **841** In-Line Feed	**W** White **B** Black	**1A** 1 Amp **2A** 2.5 Amp **3A** 3 Amp **4A** 4 Amp **5A** 5 Amp **7A** 7 Amp **10A** 10 Amp **12A** 12.5 Amp	**1A** 1 Amp **2A** 2.5 Amp **3A** 3 Amp **4A** 4 Amp **5A** 5 Amp **7A** 7 Amp **10A** 10 Amp **12A** 12.5 Amp

Example: **EC841B2A12A** [ELCO 2 Circuit In-Line Feed, Black, 2.5 Amp, 12.5 Amp]

Custom Current Rating available upon request. Separate Circuit Breaker for each circuit.

Track **Accessories**

Full line of Accessories for Track Heads

IN TODAY OUT TODAY

5YR 5 YEAR WARRANTY

General Track Accessories

	Description	CAT. #	Specs
	Louver For Par30 ET630	EP222B	Black
	Accessory Baffle	EP300W	White
		EP300B	Black
	Louver for ET616 & EDL80 Series	EP325B	Black, for ET616 & EDL80
	Louver for ET640 & ET650	EP444W	White
		EP444B	Black
	Barn Door Shutter	EP422W	White, for ET640 & ET650
		EP820W	White, for ET62830
		EP820B	Black, for ET62830
		EP822W	White, for ET631, ET635, ET637, ET639 & ET644
	Outlet Box Cover	EP800W	White
		EP800B	Black
		EP800BZ	Bronze
	Monopoint Canopy For Line Voltage fixtures	EP811W	White
		EP811B	Black
		EP811BZ	Bronze
	Outlet Adapter	EP814W	White
		EP814B	Black
		EP814BZ	Bronze
	Pendant Fixture Adapter Holds up to 35lbs	EP815W	White
		EP815B	Black
		EP815N	Nickel
	Monopoint Canopy For Low Voltage With transformer box	EP816W	White
		EP816B	Black
		EP816BZ	Bronze
		EP816N	Nickel
	Round Monopoint Canopy For Line Voltage Fixtures	EP819W	White
		EP819B	Black
		EP819BZ	Bronze

Track **Accessories**

Full line of Accessories for Track Heads

IN TODAY OUT TODAY

5YR 5 YEAR WARRANTY

General Track Accessories

	Description	CAT. #	Specs
	Straight Channel	EP844W	White
		EP844B	Black
	"L" Channel	EP845W	White
		EP845B	Black
	Clamp with 6′ Cord and Plug	EP903W	White
	48″ Steel Stem Extension	EP904W	White
		EP904B	Black
	Sloped Ceiling Pendant Adapter For Use with EP918, EP924, EP936 & EP948	EP905W	White
		EP905B	Black
	T-Bar Attachment Clip	EP989B	Nickel / Steel
	Sloped Ceiling Pendant Adapter	EP906W	White
		EP906B	Black
	Track Pendant Kit with 60″ stainless steel cable	EP960W	White
		EP960B	Black
	Pendant Assembly	EP918W	White, 18″
		EP918B	Black, 18″
		EP924W	White, 24″
		EP924B	Black, 24″
		EP936W	White, 36″
		EP936B	Black, 36″
		EP948W	White, 48″
		EP948B	Black, 48″
	Wire Cover Power feed-through with Pendant Assembly	EP807W	White
		EP807B	Black
		EP807BZ	Bronze
	Extension Stem Track Accessory	EP818B	Black, 18″
		EP824W	White, 24″
		EP824B	Black, 24″
		EP836W	White, 36″
		EP836B	Black, 36″
		EP848W	White, 48″
		EP848B	Black, 48″

Pendant **Lighting**

Flat Canopy included

IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED | 93+ CRI

LED Pendants

	Description		CAT. #	Specs
	LED Bale™ Glass Pendants 3 ⅞″ O.D. - 6 ½″ H		EDL60N-FR	Frost, 5W, 300 lm, 3000K
			EDL60N-AU	Autum, 5W, 300 lm, 3000K
	LED Blake™ Glass Pendants 4 ⅞″ O.D. - 6 ⅛″ H		EDL61N-FR	Frost, 5W, 300 lm, 3000K
			EDL61N-MA	Mars, 5W, 300 lm, 3000K
	LED Becket™ Glass Pendants 4 ½″ O.D. - 6″ H		EDL62N-AU	Autum, 5W, 300 lm, 3000K
	LED Bait™ (2″ x 8″) Die-Cast Aluminum Pendants 2 ¼″ O.D. - 8″ H		EDL80CT3W	White, 10W, 700 lm, 3000K
			EDL80CT3B	Black, 10W 700 lm, 3000K
	LED Bait™ (3″ x 8″) Die-Cast Aluminum Pendants 3″ O.D. - 8″ H	CCT SWITCH	EDL81CT3W	White, 18W, 1490 lm, 3000K, 3500K, 4000K
			EDL81CT3B	Black, 18W, 1490 lm, 3000K, 3500K, 4000K
	LED Bait™ (3″ x 10″) Die-Cast Aluminum Pendants 3″ O.D. - 10″ H	CCT SWITCH	EDL82CT3W	White, 30W, 1920 lm, 3000K, 3500K, 4000K
			EDL82CT3B	Black, 30W, 1920 lm, 3000K, 3500K, 4000K
	LED Bait™ (4″ x 10″) Die-Cast Aluminum Pendants 3 ⅜″ O.D. - 10″ H	CCT SWITCH	EDL83CT3W	White, 40W, 2690 lm, 3000K, 3500K, 4000K
			EDL83CT3B	Black, 40W, 2690 lm, 3000K, 3500K, 4000K
	Optional Steel Wire Cover for LED Die-Cast Pendants		EP883W	White, 24″ L x 3/8″ O.D.
			EP883B	Black, 24″ L x 3/8″ O.D.
			EP884W	White, 48″ L x 3/8″ O.D.
			EP884B	Black, 48″ L x 3/8″ O.D.
			EP885W	White, 72″ L x 3/8″ O.D.
			EP885B	Black, 72″ L x 3/8″ O.D.

Pendant **Lighting**

Combine with Line Voltage Monopoint Canopy or Track Connector


IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | 93+ CRI

Line Voltage Pendants & Accessories

	Description	CAT. #	Specs
	Line Voltage Bale™ Glass Pendants 3 ⅞″ O.D. - 7 ½″ H	E10FR	Frost, 60W, 120V
		E10AU	Autum, 60W, 120V
	Line Voltage Blake™ Glass Pendants 3 ⅝″ O.D. - 6 ⅛″ H	E11MA	Mars, 60W, 120V
	Line Voltage Becket™ Glass Pendants 3 ¾″ O.D. - 6″ H	E12AU	Autum, 60W, 120V
	Line Voltage Monopoint Canopy for Pendants 5″ O.D.	ECTW	White
		ECTB	Black
		ECTN	Nickel
	Line Voltage 1 or 2 Circuit Track Connector	ETTW	White
		ETTB	Black
		ETTN	Nickel

Low Voltage Pendants & Accessories


	Description	CAT. #	Specs
	Low Voltage Bale™ Glass Pendants 3 ½″ O.D. - 6″ H	E20FR	Frost, 50W, 12V
		E20AU	Autum, 50W, 12V
	Low Voltage Blake™ Glass Pendants 3 ⅛″ O.D. - 6 ⅛″ H	E21FR	Frost, 50W, 12V
		E21MA	Mars, 50W, 12V
		E21AU	Autum, 50W, 12V
	Low Voltage Becket™ Glass Pendants 3 ¼″ O.D. - 6″ H	E22AU	Autum, 50W, 12V
	50W Vertical Track Transformer	ETVW	White
		ETVB	Black
		ETVN	Nickel
	50W Semicircular Canopy	ECLW	White
		ECLB	Black
		ECLN	Nickel

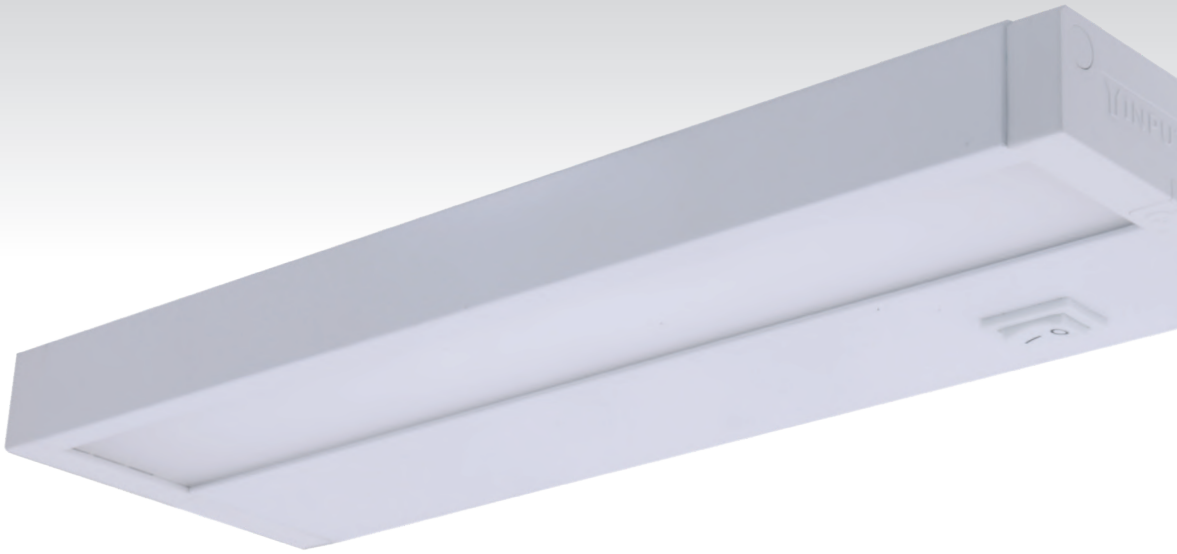

LED **Undercabinet** & **Puck** Lights

Lotus™ LED Undercabinet	258
Zinnia™ LED Undercabinet	259
Sage™ LED Undercabinet Lightbar	260
Flax™ LED Adjustable Undercabinet	260
Azalea™ LED Undercabinet	261
Ixia™ 24V DC LED Undercabinet	261
12V Puck Lights	262
24V Dimmers, 12V & 24V DC Drivers	263

LED **Undercabinet and Pucks**






Lotus™ LED Undercabinet

	Description		CAT. #	Specs
	120V LED Undercabinet with CCT Switch	CCT SWITCH	EUB11CT5W	White, 11″, 5.5W, 350 lm, 2700K - 5000K
			EUB12L30W	White, 12″, 6W, 400 lm, 3-CCT
			EUB12CT5W	White, 12″, 6W, 400 lm, 2700K - 5000K
			EUB18CT5W	White, 18″, 9.2W, 650 lm, 2700K - 5000K
			EUB22CT5W	White, 22″, 10.5W, 700 lm, 2700K - 5000K
			EUB29CT5W	White, 29″, 12.2W, 900 lm, 2700K - 5000K
			EUB32CT5W	White, 32″, 14W, 1000 lm, 2700K - 5000K
			EUB36CT5W	White, 36″, 15.3W, 1150 lm, 2700K - 5000K
			EUB48CT5W	White, 48″, 19.5W, 1450 lm, 2700K - 5000K
	120V LED Undercabinet		EUB11L30BZ	Bronze, 11″, 5.5W, 350 lm, 3000K
			EUB11L40BZ	Bronze, 11″, 5.5W, 350 lm, 4000K
			EUB12L30BZ	Bronze, 12″, 6W, 400 lm, 3000K
			EUB14L30BZ	Bronze, 14″, 7W, 480 lm, 3000K
			EUB14L40BZ	Bronze, 14″, 7W, 480 lm, 4000K
			EUB18L30BZ	Bronze, 18″, 9.2W, 650 lm , 3000K
			EUB22L40BZ	Bronze, 22″, 9.6W, 700 lm, 4000K
			EUB29L40BZ	Bronze, 29″, 12.2W, 900 lm, 4000K
			EUB36L30BZ	Bronze, 36″, 15.3W, 1150 lm, 3000K
			EUB36L40BZ	Bronze, 36″, 15.3W, 1150 lm, 4000K
			EUB48L30BZ	Bronze, 48″, 19.5W, 1450 lm, 3000K
			EUB48L40BZ	Bronze, 48″, 19.5W, 1450 lm, 4000K
	Linking Connectors		EUBC03	3″ Length
			EUBC06	6″ Length
			EUBC12	12″ Length
			EUBC24	24″ Length
	5' Power Cord		EUBCRD	5' Length
	Jbox for hard wire connection		EUBJBX	White
			EUBJBXBZ	Bronze

Lotus II™ G2 LED Undercabinet Light

	Description		CAT. #	Specs
	120V LED Undercabinet Individually switch with pass-through power. 2700K/3000K/3500K (CCT Switch)	CCT SWITCH	EU3T08W	8″, 6W, 360 lm, 2700K, 3000K, 3500K
			EU3T12W	12″, 8W, 485 lm, 2700K, 3000K, 3500K
			EU3T24W	24″, 14W, 850 lm, 2700K, 3000K, 3500K
	6″ Extension Cable		EU3TC6	6″ Length
	5′ Power Cable		EU3TPC	5' Length

LED **Undercabinet and Pucks**





Zinnia™ LED Undercabinet Bar



120V Zinnia™
LED Undercabinet Bar
White (W) and Bronze (BZ)

Description	CAT. #	Specs
	EUM41W	White, 12 ¼", 5W, 450 lm, 3000K
	EUM42W	White, 21", 9W, 800 lm, 3000K
	EUM43W	White, 24 ¼", 10W, 900 lm, 3000K
	EUM44W	White, 33 ¼", 15W, 1350 lm, 3000K
	EUM45W	White, 42 ¼", 20W, 1800 lm, 3000K
	EUM41BZ	Bronze, 12 ¼", 5W, 450 lm, 3000K
	EUM42BZ	Bronze, 21", 9W, 800 lm, 3000K
	EUM43BZ	Bronze, 24 ¼", 10W, 900 lm, 3000K
	EUM44BZ	Bronze, 33 ¼", 15W, 1350 lm, 3000K
	EUM45BZ	Bronze, 42 ¼", 20W, 1800 lm, 3000K

0-10V Zinnia™ LED Undercabinet Bar




0-10V 120V Zinnia™
LED Undercabinet Bar
White (W) and Bronze (BZ)

Description	CAT. #	Specs
	EUM41DXW	White, 12 ¼", 5W, 450 lm, 3000K, 120V
	EUM42DXW	White, 21", 9W, 800 lm, 3000K, 120V
	EUM43DXW	White, 24 ¼", 10W, 900 lm, 3000K, 120V
	EUM44DXW	White, 33 ¼", 15W, 1350 lm, 3000K, 120V
	EUM45DXW	White, 42 ¼", 20W, 1800 lm, 3000K, 120V
	EUM41DXBZ	Bronze, 12 ¼", 5W, 450 lm, 3000K, 120V
	EUM42DXBZ	Bronze, 21", 9W, 800 lm, 3000K, 120V
	EUM43DXBZ	Bronze, 24 ¼", 10W, 900 lm, 3000K, 120V
	EUM44DXBZ	Bronze, 33 ¼", 15W, 1350 lm, 3000K, 120V
	EUM45DXBZ	Bronze, 42 ¼", 20W, 1800 lm, 3000K, 120V

0-10V 277V Zinnia™
LED Undercabinet Bar
White (W) and Bronze (BZ)

	EUM41DXW-7	White, 12 ¼", 5W, 450 lm, 3000K, 277V
	EUM42DXW-7	White, 21", 9W, 800 lm, 3000K, 277V
	EUM43DXW-7	White, 24 ¼", 10W, 900 lm, 3000K, 277V
	EUM44DXW-7	White, 33 ¼", 15W, 1350 lm, 3000K, 277V
	EUM45DXW-7	White, 42 ¼", 20W, 1800 lm, 3000K, 277V
	EUM41DXBZ-7	Bronze, 12 ¼", 5W, 450 lm, 3000K, 277V
	EUM42DXBZ-7	Bronze, 21", 9W, 800 lm, 3000K, 277V
	EUM43DXBZ-7	Bronze, 24 ¼", 10W, 900 lm, 3000K, 277V
	EUM44DXBZ-7	Bronze, 33 ¼", 15W, 1350 lm, 3000K, 277V
	EUM45DXBZ-7	Bronze, 42 ¼", 20W, 1800 lm, 3000K, 277V

LED **Undercabinet and Pucks**






Sage™ LED Showcase Lightbar

	Description		CAT. #	Specs
	20V LED Light Bar " Square)	CCT SWITCH	EUD32CT5W	12", 5W, 300 lm, 2700K - 5000K
		CCT SWITCH	EUD34CT5W	24", 10W, 600 lm, 2700K - 5000K
		CCT SWITCH	EUD35CT5W	30", 12W, 720 lm, 2700K - 5000K
		CCT SWITCH	EUD36CT5W	36", 15W, 900 lm, 2700K - 5000K
	Power Cord		EUDCRD	6' Length
	End-to-End Connector		EUDCS31	
	Linking Cable		EUDC31	6" Length
	Jbox for hard wire connection		EUDJBX	White

Flax™ LED Adjustable Undercabinet

	Description	CAT. #	Specs
	24V LED Undercabinet (90 ° Angle Tilt)	EUM21W	8", 4.5W, 200 lm, 3000K
		EUM22W	16", 8.9W, 400 lm, 3000K
	18W Adaptor	EUDRV18	18W, 24V DC, 120V, 72" Power Cord. For EUD21-24
	Adaptor	EUDRV72	72W, 72" output wires. For EUD21-24
	Mini Connector	EUMCS1	For EUM21-24
	Inline Switch	EUMS1	12" wire, for EUM21-24
	Linking Cable Wire	EUMC24	24" wire, for EUM21-24
		EUMC36	36" wire, for EUM21-24
	Inline Dimmer Switch	DIMU1	72W, for EUM21-24

LED **Undercabinet and Pucks**






Azalea™ LED Undercabinet Bar

	Description	CAT. #	Specs
	120V LED Undercabinet	EUS41W	13 ½". 5W, 370 lm, 4000K
		EUS45W	35 ½", 12W, 1200 lm, 4000K
		EUS47W	47 ½", 17W, 1600 lm, 4000K
	Linking Cable	EUSC6	6" Length
		EUSC12	12" Length
		EUSC24	24" Length
		EUSC36	36" Length
	Power Cord	EUSPC	5' Length

Ixia™ **24V DC** LED Slim Undercabinet/Showcase

	Description	CAT. #	Specs
	24V DC LED Undercabinet Bar CCT Tunable with EUDCCT (3000K - 6500K)	EUN51W	8", 3W, 160 lm, 3000K-6500K
		EUN52W	12", 4.5W, 260 lm, 3000K-6500K
		EUN53W	20", 7.5W, 420 lm, 3000K-6500K
	CCT Controller/Dimmer	EUDCCT	
	Linking Cable	EUDC51	
	Dimmer Switch	EUDS1	
	PIR Sensor	EUDPH1	
	Motion Sensor	EUDMS1	
	Input Connector	EUDPC	
	24V LED Driver	DRV24V30W	

LED **Undercabinet and Pucks**






Sedum™ 12V DC Super Slim Puck Lights (Dimmable with 12V DC dimmable driver)

	Description	CAT. #	Specs
	Sedum™ Super Slim Mini **Magnetic** LED Puck Lights 3″ O.D. x ¼″ H	E261-27W	White, 2.2W, 170 lm, 2700K
		E261-27B	Black, 2.2W, 170 lm, 2700K
		E261-27BZ	Bronze, 2.2W, 170 lm, 2700K
		E261W	White, 2.2W, 170 lm, 3000K
		E261B	Black, 2.2W, 170 lm, 3000K
		E261BZ	Bronze, 2.2W, 170 lm, 3000K
		E261-35W	White, 2.2W, 170 lm, 3500K
		E261-35B	Black, 2.2W, 170 lm, 3500K
		E261-35BZ	Bronze, 2.2W, 170 lm, 3500K
	LED Puck Lights Driver	DRV12V12W	12W, 12V DC, for Sedum™ Mini LED Puck Light
	Sedum™ Super Slim Mini **Magnetic** LED Puck Lights Kits Kit Includes: **(3)** LED Puck Lights with Driver included 	E363-27W	White, 2.2W, 170 lm, 2700K
		E363-27B	Black, 2.2W, 170 lm, 2700K
		E363-27BZ	Bronze, 2.2W, 170 lm, 2700K
		E363W	White, 2.2W, 170 lm, 3000K
		E363B	Black, 2.2W, 170 lm, 3000K
		E363BZ	Bronze, 2.2W, 170 lm, 3000K
		E363-35W	White, 2.2W, 170 lm, 3500K
		E363-35B	Black, 2.2W, 170 lm, 3500K
		E363-35BZ	Bronze, 2.2W, 170 lm, 3500K
	Sedum™ Super Slim Mini Magnetic LED Puck Lights Kits Kit Includes: **(6)** LED Puck Lights with Driver included 	E366-27W	White, 2.2W, 170 lm, 2700K
		E366-27B	Black, 2.2W, 170 lm, 2700K
		E366-27BZ	Bronze, 2.2W, 170 lm, 2700K
		E366W	White, 2.2W, 170 lm, 3000K
		E366B	Black, 2.2W, 170 lm, 3000K
		E366BZ	Bronze, 2.2W, 170 lm, 3000K
		E366-35W	White, 2.2W, 170 lm, 3500K
		E366-35B	Black, 2.2W, 170 lm, 3500K
		E366-35BZ	Bronze, 2.2W, 170 lm, 3500K

Undercabinet **and Pucks**





24V DC Dimmers

	Description	CAT. #	Specs
	Dimmer with Built-In Driver with On/Off Switch	DIMTP2	60W, 120V Input
		DIMTP3	100W, 120V Input

12V & 24V DC Drivers

	Description	CAT. #	Specs
	Electronic Driver ELV Dimmable	DRVE24V60W	24V, 60W
	Universal Dimmable LED Driver/Transformer (Small)	DRVU24V24WD	24V DC, 24W, 1A
		DRVU24V60WD	24V DC, 60W, 2.5A
	Universal Dimmable LED Driver/Transformer (Medium)	DRVU12V100WD	12V DC, 100W, 8A
		DRVU24V100WD	24V DC, 100W, 4A
	Universal Dimmable LED Driver/Transformer (Large)	DRVU24V200WD	24V DC, 200W, 8A
	Universal Dimmable LED Driver/Transformer (X-Large)	DRVU24V300WD	24V DC, 300W, 12A



Exit & Emergency Lighting

Exit and Emergency Lighting	265
Accessories for Exit & Emergency Lights	265

Exit and Emergency **Lighting**


Self illuminating Signs

IN TODAY
OUT TODAY

Exit and Emergency

	Description		CAT. #	Specs
	LED Exit Sign with Battery Back Up	DAMP LOCATION	EELEDRG	Red & Green Letters
			EELE1	Red Letters
			EELEDBRG	Red & Green Letters/Black Housing
			EELE1B	Red Letters/Black Housing
	Self Illuminating Exit Sign 13″ L - 7″ H - ⅛″ W	DAMP LOCATION	EE80S	Green Letters
			EE81S	Red Letters
	LED Exit Sign with LED Emergency Lights 11 13/16″ L - 7 ¼″ H - 1 13/16″ W	DAMP LOCATION	EE86HRG	Red & Green Letters
	LED Exit Sign and LED Emergency Lights 13″ L - 8 ½″ H - 2 9/16″ W	DAMP LOCATION	EE94HG	Green Letters
			EE94HRG	Red & Green Letters
	Single & Double Face LED Edge Lit Exit Sign with Battery Backup 11 ¼″ L - 9 ⅞″ H - 1 ½″ W	DAMP LOCATION	EDGLIT1RG	Red & Green Letters, Single Face
			EDGLIT2RG	Red & Green Letters, Double Face
	Single & Double Face LED Recessed Edge Lit Exit Sign with Battery Backup 12 ¾″ L - 7 ½″ H - ½″ W	DAMP LOCATION	EDGREC1RG	Red & Green Letters, Single Face
			EDGREC2RG	Red & Green Letters, Double Face
	Outdoor LED Diecast Emergency & Path Light with Battery Backup 6 ½″ L - 10 ½″ H - 3 ¾″ W	WET LOCATION	EE91LW	White
			EE91LBZ	Bronze
	LED Emergency Light 7 15/16″ L - 4 ¼″ H - 2 13/16″ W	DAMP LOCATION	EE80L	Two 2W light heads, 250 lm total.
	LED Adjustable Emergency Light 8 ⅞″ L - 4 ½″ H - 2 ⅞″ W	DAMP LOCATION	EE22L	Two Adjustable 1.5W LED light heads

Accessories for Exit & Emergency Lights

	Description	CAT. #	Specs
	Battery Backup	EEP9A	6V Ni-Cad Battery Pack for EE91L
	Clear Shield for Exit Signs	EEPS60	12 ¾″ W - 10 ⅜″ H - 2 ½″ D
	Clear Shield for Emergency Heads	EEPS65	15 ⅜″ W - 7 ¾″ H - 5 ¾″ D
	Wire Guards	EEWG11	15″ W - 13 ½″ H - 6″ D
		EEWG22	30″ W - 13 ½″ H - 6″ D



LED Wallpacks & Floodlights

LED Wall Pack & Wall Mount	267
LED Floodlights & Accessories	268

LED **Wall Packs and Floodlights**

Energy efficient performance





LED Wall Packs

	Description	CAT. #	Specs
	Medium LED Wall Pack 120/277V DLC (175W MH Equivalent) 14 ¼″ L - 9 ¼″ H - 7 ⅜″ W	EWP90M40	90W, 9300 lm, 4000K
		EWP90M50	90W, 9500 lm, 5000K

** Dimmable Wall Packs Available. Visit **www.elcolighting.com** **

LED Wall Mount

	Description	CAT. #	Specs
 *Add **U** at end of item# for 120/277V	LED Wall Mount with 120V Photocell DLC (70W MH Equivalent) 5 ½″ L - 8 ⅜″ H - 3 ½″ W	EWM25W30	25W, 2000 lm, 3000K

LED **Wall Packs and Floodlights**

Energy efficient performance




WET LOCATION | IN TODAY OUT TODAY | 50K HRS 50,000 HOURS | 5YR 5 YEAR WARRANTY | INTEGRATED LED | DLC DLC QPL

LED Floodlights


	Description	CAT. #	Specs
	Trunnion Mount Mini Floodlight DLC (100W MH Equivalent) - 7″ L - 4 ½″ H - 1 ⅝″ W	EFL30S40WFT	30W, 3000 lm, 4000K
	Medium Flood Spread LED Floodlight DLC (100W MH Equivalent) - 9 5⁄16″ L - 6 15⁄16″ H - 4 9⁄16″ W	EFL35M40FL	35W, 2800 lm, 4000K
		EFL35M50FL	35W, 3000 lm, 5000K
	Medium Flood Spread LED Floodlight DLC (150W MH Equivalent)	EFL45M50FL	45W, 4500 lm, 5000K
	Wide Flood Spread LED Floodlight DLC (100W MH Equivalent)	EFL35M40WF	35W, 2800 lm, 4000K
		EFL35M50WF	35W, 3000 lm, 5000K
	Wide Flood Spread LED Floodlight DLC (150W MH Equivalent)	EFL45M40WF	45W, 4000 lm, 4000K
		EFL45M50WF	45W, 4500 lm, 5000K
	Large LED Floodlight DLC (200W MH Equivalent) 12 15⁄16″ L - 10 15⁄16″ H - 5 ½″ W	EFL70L40WF	70W, 6750 lm, 4000K
		EFL70L50WF	70W, 7500 lm, 5000K

** Large Dimmable LED Floodlight Available. Visit* ***www.elcolighting.com*** ***

Accessories

	Description	CAT. #	Specs
	120/277V Button Photocell	EWPPHBU	120/277V
	120/277V Swivel Photocell	EWPPHSU	
	Wireguard for Medium Size (35W/45W) Floodlight	EFLMWG	
	Wireguard for Large Size (75W/90W) Floodlight	EFLLWG	
	Slipfitter for Large Floodlights. Field Changeable	EFLLSF	
	Floodlight Adjustable Trunnion Bracket	EFLLTB	
	Knuckle	EFLMKW	For medium Floodlights only



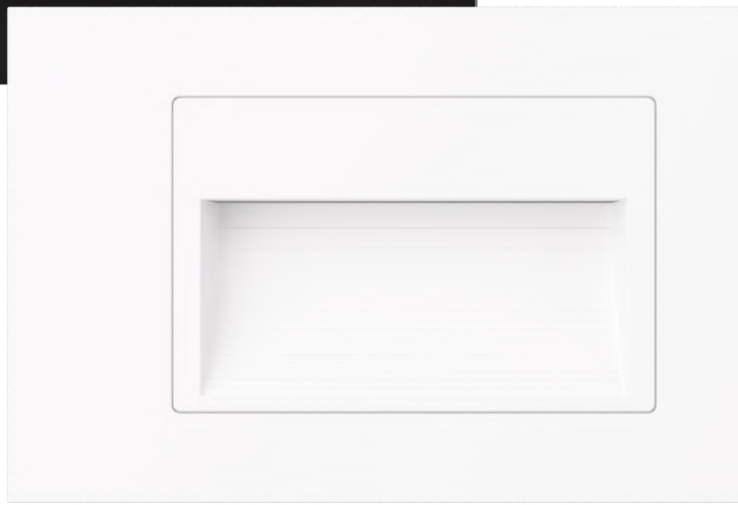

LED **Pathway** Lighting

Koto™ Landscape Bullet & In-Ground	270
In-Ground LED Lighting	277
Trogon™ LED Brick Lights	278
Incandescent Diecast Brick Lights	278
Mini Moa™ LED Step Lights	279
Ibis™ Diecast LED Step Lights	279
Incandescent Step Lights	282

The Koto™ System

Koto™ Landscape Bullet LED Fixture



FINISHES	LUMENS	COLOR TEMPERATURE
Black Brass	350 lm - 1500 lm	2400K - 4000K, Sunset, Human Centric, 5-CCT and 1800K - 4000K Tunable White

Covered by U.S. PATENTS and Patents Pending

The **Koto™ Landscape** System

1 ½" Aperture Fixtures with Twist-On System

95+ CRI | WET LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

NEW! Koto™ Landscape Bullet



- The Koto™ Landscape Bullet offers focused, precision illumination in a compact, architectural form.
- It features a fully customizable and replaceable Koto™ Module, providing flexibility in output voltage, beam spread and color temperature.
- Designed for junction box or staked-mounted in-ground installation.
- Features an adjustable base with locking mechanism for a full 180° tilt for exact beam placement and maximum design flexibility
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K

Standard Koto™ Landscape Module Product Number Builder



Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E25BE Landscape Bullet	**B** Black **R** Brass	**-03**[1] 350 lm (5W) **-07** 750 lm (10.5W) **-09** 950 lm (10.5W) **-11** 1150 lm (12.5W) **-13** 1350lm (12.5W) **-15** 1500 lm (14W) **-08** 850 lm (10.5W) **-10** 1050 lm (12.5W)	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[2] Sunset **HC**[3] Human Centric **CT5** CCT Switch: 2700K, 3000K 3500K, 4000K, 5000K	**(Blank)** 120V, Triac/ELV	**(Blank)**[4] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[5] 90° **-T**[6] 10°

Example: **E25BEB-0735** [Koto™Landscape Bullet, Black, 750 lumens,3500K, 120V,Triac/ELV, 38° Beam Angle]

[1] Available in 2700K & 3000K
[2] Sunset, Dim to Warm technology, dims from 3000K to 1800K. Available with 950 lm & 1150 lm only.
[3] Human Centric, Dim to Warm technology, dims from 4000K to 2200K. Available with 1150 lm only.
[4] 38° installed on module with 25° & 60° included in box.
[5] Available with frosted reflector only.
[6] 10° available with 2700K & 3000K only in 350 lm & 750 lm

0-10V/Triac/ELV Koto™ Landscape Module Product Number Builder



Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E25BE Landscape Bullet	**B** Black **R** Brass	**-10** 1050 lm (12.5W)	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1] Sunset	**X** 120V, 0-10V/Triac/ELV (1%)	**(Blank)**[2] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[3] 90°

Example: **E25BER-1040X-S** [Koto™Landscape Bullet, Brass, 1050 lumens, 4000K, 120V, 0-10V/Triac/ELV,18° Beam Angle]

[1] Sunset, Dim to Warm technology, dims from 3000K to 1800K.
[2] 38° installed on module with 25° & 60° included in box.
[3] Available with frosted reflector only.

The **Koto™ Landscape** System

1 ½" Aperture Fixtures with Twist-On System

95+ CRI | WET LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

NEW! Koto™ Landscape Bullet



- The Koto™ Landscape Bullet offers focused, precision illumination in a compact, architectural form.
- It features a fully customizable and replaceable Koto™ Module, providing flexibility in output voltage, beam spread and color temperature.
- Designed for junction box or staked-mounted in-ground installation.
- Features an adjustable base with locking mechanism for a full 180° tilt for exact beam placement and maximum design flexibility
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Sunset option dims from 3000K to 1800K and Tunable White option with range of 4000K to 1800K.

DALI-2 DT8 Tunable White Koto™ Landscape Module Product Number Builder



Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E25BE Landscape Bullet	**B** Black **R** Brass	**-08** 880 lm (11.5W)	**4T** Tunable White 4000K - 1800K	**A** 120V, DALI-2 DT8 Tunable White (0.1%)	**(Blank)**[1] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[2] 90°

Example: **E25BER-084TA** [Koto™ Landscape Bullet, Brass, 880 lumens, Tunable White 4000K-1800K, 120V, DALI-2 DT8 Tunable White Dims to 0.1%, 38° Beam Angle]

[1] 38° installed on module with 25° & 60° included in box.

[2] Available with frosted reflector only.

Low Voltage Koto™ Landscape Module Product Number Builder



Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E25BE Landscape Bullet	**B** Black **R** Brass	**-08** 850 lm (10.5W)	**27** 2700K **30** 3000K **SD**[1] Sunset	**1A** 12V AC **2D** 24V DC	**(Blank)**[2] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[3] 90°

Example: **E25BEB-08302D** [Koto™ Landscape Bullet, Black, 850 lumens, 3000K, 24V DC, 38° Beam Angle]

[1] Available in 1A (12V AC) voltage only.

[2] 38° installed on module with 25° & 60° included in box.

[3] Available with frosted reflector only.

Koto™ Landscape In-Ground LED Fixture



Face Plate, Drive-Over Rated



Module Holder

Koto™ Module

Lens Holder

Field Changeable Secondary Optics

Field Changeable Lens

Light Engine

Integrated Koto™ Module Allows for Easy In-Field Upgrades, Maintenance and Replacements

Integral Driver


LOW VOLTAGE: 12V AC, 24V DC. Dimming Based on Transformer Used

LINE VOLTAGE: 120V AC INPUT with TRIAC, ELV, 0-10V & DALI-2 DT8 Dimming



Fixture Body

Optional Concrete Pour Housing

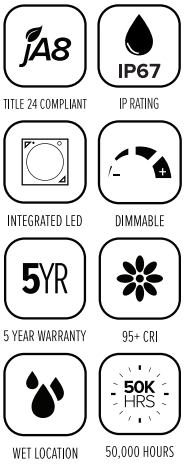


FINISHES

Black

Stainless

Brass

LUMENS



350 lm - 1500 lm

COLOR TEMPERATURE



2400K - 4000K, Sunset, Human Centric, 5-CCT and 1800K - 4000K Tunable White

Covered by U.S. PATENTS and Patents Pending

The **Koto™ Landscape** System

1 ½" Aperture Fixtures with Twist-On System

95+ CRI | WET LOCATION | IN TODAY OUT TODAY | 50,000 HOURS | TITLE 24 COMPLIANT | DIMMABLE

NEW! Koto™ Landscape In-Ground



- The Koto™ Landscape In-Ground delivers durable, high performance illumination with a refined architectural presence.
- A precision-cast solid brass trim provides lasting durability and premium finish.
- It features a fully customizable and replaceable Koto™ Module, providing flexibility in output, voltage, beam spread and color temperature.
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K

Standard Koto™ Landscape Module Product Number Builder



Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E25GD Landscape In-Ground	**B** Black **S** Stainless **R** Brass	**-03**[1] 350 lm (5W) **-07** 750 lm (10.5W) **-09** 950 lm (10.5W) **-11** 1150 lm (12.5W) **-13** 1350 lm (12.5W) **-15** 1500 lm (14W) **-08** 850 lm (10.5W) **-10** 1050 lm (12.5W)	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[2] Sunset **HC**[3] Human Centric **CT5** CCT Switch: 2700K, 3000K 3500K, 4000K, 5000K	**(Blank)** 120V, Triac/ELV	**(Blank)**[4] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[5] 90° **-T**[6] 10°

Example: **E25GDR-0940** [Koto™Landscape In-Ground, Brass, 950 lumens, 4000K, 120V,Triac/ELV, 38° Beam Angle]

[1] Available in 2700K & 3000K
[2] Sunset, Dim to Warm technology, dims from 3000K to 1800K. Available with 950 lm & 1150 lm only.
[3] Human Centric, Dim to Warm technology, dims from 4000K to 2200K. Available with 1150 lm only.
[4] 38° installed on module with 25° & 60° included in box.
[5] Available with frosted reflector only.
[6] 10° available with 2700K & 3000K only in 350 lm & 750 lm

0-10V/Triac/ELV Koto™ Landscape Module Product Number Builder



Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E25GD Landscape In-Ground	**B** Black **S** Stainless **R** Brass	**-10** 1050 lm (12.5W)	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **SD**[1] Sunset	**X** 120V, 0-10V/Triac/ELV (1%)	**(Blank)**[2] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[3] 90°

Example: **E25GDB-1027X-W** [Koto™Landscape In-Ground, Black, 1050 lumens, 2700K, 120V, 0-10V/Triac/ELV dims to 1%, 60° Beam Angle]

[1] Sunset, Dim to Warm technology, dims from 3000K to 1800K.
[2] 38° installed on module with 25° & 60° included in box.
[3] Available with frosted reflector only.

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The **Koto™ Landscape** System

1 ½" Aperture Fixtures with Twist-On System



NEW! Koto™ Landscape In-Ground



- The Koto™ Landscape In-Ground delivers durable, high performance illumination with a refined architectural presence.
- A precision-cast solid brass trim provides lasting durability and premium finish.
- It features a fully customizable and replaceable Koto™ Module, providing flexibility in output, voltage, beam spread and color temperature.
- Includes Standard 38° lens, with 25° and 60° lenses. Optional: 10°, 18° and 90° lenses available
- Sunset option dims from 3000K to 1800K and Tunable White option with range of 4000K to 1800K.

DALI-2 DT8 Tunable White Koto™ Landscape Module Product Number Builder



Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E25GD Landscape In-Ground	**B** Black **S** Stainless **R** Brass	**-08** 880 lm (11.5W)	**4T** Tunable White 4000K - 1800K	**A** 120V, DALI-2 DT8 Tunable White (0.1%)	**(Blank)**[1] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[2] 90°

Example: **E25GDS-084TA-N** [Koto™Landscape In-Ground, Stainless, 880 lumens, Tunable White 4000K-1800K, 120V, DALI-2 DT8 Tunable White Dims to 0.1%, 25° Beam Angle]

[1] 38° installed on module with 25° & 60° included in box. [2] Available with frosted reflector only.

Low Voltage Koto™ Landscape Module Product Number Builder



Style	Finish	Module	Color Temperature	Voltage	Beam Angle
E25GD Landscape In-Ground	**B** Black **S** Stainless **R** Brass	**-08** 850 lm (10.5W)	**27** 2700K **30** 3000K **SD**[1] Sunset	**1A** 12V AC **2D** 24V DC	**(Blank)**[2] 38° **-S** 18° **-N** 25° **-W** 60° **-E**[3] 90°

Example: **E25GDB-08SD1A** [Koto™ Landscape In-Ground, Black, 850 lumens, Sunset 3000K - 1800K, 12V AC, 38° Beam Angle]

[1] Available in 1A (12V AC) voltage only. [2] 38° installed on module with 25° & 60° included in box. [3] Available with frosted reflector only.

The **Koto**™ **Landscape** System

1 ½″ Aperture Fixtures with Twist-On System



Accessories

	Description	CAT. #	Specs
	In Ground Stake 3″ O.D. - 8″ H	EGKSTK1	For use with Low Voltage Landscape Bullet
	Concrete Pour Housing 6 ¼″ O.D. -6 ¼″ H	EGK25HGS	For use with Landscape In-Ground

LED **Pathway Lighting**

In-Ground, Brick and Step Lights




INTEGRATED LED · DIMMABLE · WET LOCATION · IP67 RATED · IN TODAY OUT TODAY

In-Ground LED Lighting

Description	CAT. #	Specs



INDOOR / OUTDOOR APPLICATION

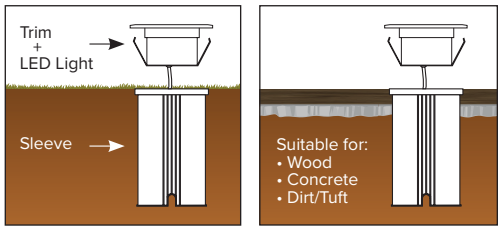

Energy efficient LED Lighting fixtures designed to be install in-ground. Our in-ground applications are water and weather resistant making it the perfect lighting solution for virtually any application. Suitable for installation in concrete, soft dirt and turf applications. The in-ground lighting is ideal as a safety/accent lighting in patios, gardens, decks, docks, building entrances, pathways, and many other locations.



In-Ground
LED Light Fixtures

IP67 RATED

- Dimmable Triac/ELV
- 45° beam angle
- Weather resistant clear glass lens
- Weather resistant in-ground sleeve
- ETL listed for wet locations

ELIG330250N	3W, 275 lm, 3000K, 12V DC, Nickel
ELIG330250B	3W, 275 lm, 3000K, 12V DC, Black
ELIG330250BZ	3W, 275 lm, 3000K, 12V DC, Bronze
ELIG330250CP	3W, 275 lm, 3000K, 12V DC, Copper



In-Ground LED Light


IP67 RATED

ELIG330	3W, 3000K, 12 V DC, Dimmable Triac/ELV, Stainless steel body, water-resistant glass lens with silicon gasketed seal, ETL listed for wet location. 1 ½″ O.D. - 1 ⅛″ H



In-Ground Sleeve

ELIGRH	Weather resistant in-ground sleeve for concrete or soil installation. 2 ⅛″ O.D. - 1 ¾″ I.D. - 3 ⅜″ H



In-Ground Stainless Steel
Screw-On Trims

ELIG250N	Nickel, 2 ½″ O.D.
ELIG250B	Black, 2 ½″ O.D.
ELIG250BZ	Bronze, 2 ½″ O.D.
ELIG250CP	Copper, 2 ¾″ O.D.

LED **Pathway Lighting**

In-Ground, Brick and Step Lights

INTEGRATED LED · 93+ CRI · IN TODAY OUT TODAY

Trogon™ LED Brick Lights

WET LOCATION

	Description	CAT. #	Specs
	Trogon™ LED Brick Light with Angled Louver 8″ L - 2 7/16″ H - 3 3/4″ W	ELST81W	White, 5.4W, 340 lm, 3000K
		ELST81B	Black, 5.4W, 340 lm, 3000K
		ELST81BZ	Bronze, 5.4W, 340 lm, 3000K
	Trogon™ LED Brick Light with Grill Faceplate 8″ L - 2 7/16″ H - 3 3/4″ W	ELST82W	White, 5.4W, 340 lm, 3000K
		ELST82B	Black, 5.4W, 340 lm, 3000K
		ELST82BZ	Bronze, 5.4W, 340 lm, 3000K
	Trogon™ LED Brick Light with Open Faceplate 8″ L - 2 7/16″ H - 3 3/4″ W	ELST83W	White, 5.4W, 340 lm, 3000K
		ELST83B	Black, 5.4W, 340 lm, 3000K
		ELST83BZ	Bronze, 5.4W, 340 lm, 3000K
	HIGHLUMEN - Trogon™ LED Brick Light with Open Faceplate - 8″ L - 2 7/16″ H - 3 3/4″ W	ELST84W	White, 12W, 1000 lm, 3000K
		ELST84B	Black, 12W, 1000 lm, 3000K
		ELST84BZ	Bronze, 12W, 1000 lm, 3000K
	HIGHTECH - Directional LED Brick Light with Open Faceplate - 8″ L - 2 7/16″ H - 3 3/4″ W	ELST85W	White, 12W, 1000 lm, 3000K, with cutoff angle
		ELST85B	Black, 12W, 1000 lm, 3000K, with cutoff angle
		ELST85BZ	Bronze, 12W, 1000 lm, 3000K, with cutoff angle

Accessories for Brick Lights

	Description	CAT. #	Specs
	Grill Faceplate Replacement 9 3/4″ L - 3 5/8″ H	PST1W	White, for ELST82
		PST1B	Black, for ELST82
		PST1BZ	Bronze, for ELST82
	Louver Faceplate Replacement 9 3/4″ L - 3 5/8″ H	PST4W	White, for ELST81
		PST4B	Black, for ELST81
		PST4BZ	Bronze, for ELST81
	Open Faceplate Replacement 9 3/4″ L - 3 5/8″ H	PST5W	White, for ELST83 & ELST84
		PST5B	Black, for ELST83 & ELST84
		PST5BZ	Bronze, for ELST83 & ELST84
	Replacement Lens for Brick Lights	PST2L	For ELST81, ELST82, ELST83 & ELST84
	LED Module Replacement Driver included	PST80	5.4W, 340 lm, 3000K, for ELST81, ELST82, ELST83
		PST84	12W, 1000 lm, 3000K, for ELST84
		PST85	12W, 1000 lm, 3000K, for ELST85

Incandescent Diecast Brick Lights

WET LOCATION

	Description	CAT. #	Specs
	Incandescent Brick Light with Angled Louver 8 1/2″ L - 3″ H - 4 1/8″ W	ELST31W	White, 40W, 120V
		ELST31B	Bronze, 40W, 120V
		ELST31BZ	Bronze, 40W, 120V
	Incandescent Brick Light with Open Faceplate 8 1/2″ L - 3″ H - 4 1/8″ W	ELST32W	White, 40W, 120V
		ELST32B	Black, 40W, 120V
		ELST32BZ	Bronze, 40W, 120V
	Incandescent Brick Light with Grill Faceplate 8 1/2″ L - 3″ H - 4 1/8″ W	ELST37W	White, 40W, 120V
		ELST37B	Black, 40W, 120V
		ELST37BZ	Bronze, 40W, 120V

LED **Pathway Lighting**

In-Ground, Brick and Step Lights

INTEGRATED LED · 93+ CRI · IN TODAY OUT TODAY


Mini Moa™ LED Step Lights

WET LOCATION

	Description	CAT. #	Specs
	120V Mini Moa™ LED Step Light with Angled Louver (Vertical) 2 ¾″ L - 4 ½″ H - 1 ¼″ W	ELST64W	120V, White, 0.8W, 3000K
		ELST64B	120V, Black, 0.8W, 3000K
		ELST64BZ	120V, Bronze, 0.8W, 3000K
	12V Mini Moa™ LED Step Light with Angled Louver (Vertical) 2 ¾″ L - 4 ½″ H - 1 ¼″ W	ELST74W	12V, White, 0.8W, 3000K
		ELST74B	12V, Black, 0.8W, 3000K
		ELST74BZ	12V, Bronze, 0.8W, 3000K
	120V Mini Moa™ LED Step Light with Angled Louver (Horizontal) 4 ½″ L - 2 ¾″ H - 1 ¼″ W	ELST65W	120V, White, 0.8W, 3000K
		ELST65B	120V, Black, 0.8W, 3000K
		ELST65BZ	120V, Bronze, 0.8W, 3000K
	12V Mini Moa™ LED Step Light with Angled Louver (Horizontal) 4 ½″ L - 2 ¾″ H - 1 ¼″ W	ELST75W	12V, White, 0.8W, 3000K
		ELST75B	12V, Black, 0.8W, 3000K
		ELST75BZ	12V, Bronze, 0.8W, 3000K
	120V Mini Moa™ LED Step Light with Frosted Acrylic Lens 4 ½″ L - 2 ¾″ H - 1 ¼″ W	ELST66W	120V, White, 0.8W, 3000K
		ELST66B	120V, Black, 0.8W, 3000K
		ELST66BZ	120V, Bronze, 0.8W, 3000K
	12V Mini Moa™ LED Step Light with Frosted Acrylic Lens 4 ½″ L - 2 ¾″ H - 1 ¼″ W	ELST76W	12V, White, 0.8W, 3000K
		ELST76B	12V, Black, 0.8W, 3000K
		ELST76BZ	12V, Bronze, 0.8W, 3000K

Ibis™ Diecast LED Step Lights with 3-CCT & 5-CCT Switch

WET LOCATION

	Description		CAT. #	Specs
	120V Ibis™ Embedded Mini LED Step Light with 3-CCT Switch 4 ¾″ L - 2 ⅞″ H - 1 ¼″ W	CCT SWITCH	ELST27CT3W	120V, White, 5W, 250 lm, 3000K - 5000K
			ELST27CT3B	120V, Black, 5W, 250 lm, 3000K - 5000K
			ELST27CT3BZ	120V, Bronze, 5W, 250 lm, 3000K - 5000K
	120V Ibis™ Angled Louver Mini LED Step Light with 3-CCT Switch 4 ¾″ L - 2 ⅞″ H - 1 ⅛″ W	CCT SWITCH	ELST28CT3W	120V, White, 3W, 100 lm, 3000K - 5000K
			ELST28CT3B	120V, Black, 3W, 100 lm, 3000K - 5000K
			ELST28CT3BZ	120V, Bronze, 3W, 100 lm, 3000K - 5000K
	120V Ibis™ Frosted Lens Mini LED Step Light with 3-CCT Switch 4 ¾″ L - 2 ⅞″ H - 1 ⅛″ W	CCT SWITCH	ELST29CT3W	
			ELST29CT3B	
			ELST29CT3BZ	
	120V Vertical Mini LED Step Light with 5-CCT Switch 4 ¼″ L - 3 ½″ H - 2″ W	CCT SWITCH	ELST60CT5W	120V, White, 3W, 80 lm, 2700K - 5000K

LED **Pathway Lighting**

In-Ground, Brick and Step Lights

Ibis™ Diecast LED Step Lights

WET LOCATION

INTEGRATED LED | 93+ CRI | IN TODAY OUT TODAY

	Description	CAT. #	Specs
	12V Ibis™ Round LED Step Light with Open Faceplate 4 ¾″ O.D. - 2 ⅛″ I.D. - 1 3⁄16″ W	ELST8430W	12V, White, 3W, 3000K
		ELST8430B	12V, Black, 3W, 3000K
		ELST8430N	12V, Nickel, 3W, 3000K
		ELST8430BZ	12V, Bronze, 3W, 3000K
		ELST8430CP	12V, Copper, 3W, 3000K
		ELST8440W	12V, White, 3W, 4000K
		ELST8440B	12V, Black, 3W, 4000K
		ELST8440N	12V, Nickel, 3W, 4000K
		ELST8440BZ	12V, Bronze, 3W, 4000K
		ELST8440CP	12V, Copper, 3W, 4000K
	120V Ibis™ Round LED Step Light with Open Faceplate 4 ¾″ O.D. - 2 ⅛″ I.D. - 1 3⁄16″ W	ELST8630W	120V, White, 3W, 3000K
		ELST8630B	120V, Black, 3W, 3000K
		ELST8630N	120V, Nickel, 3W, 3000K
		ELST8630BZ	120V, Bronze, 3W, 3000K
		ELST8630CP	120V, Copper, 3W, 3000K
		ELST8640W	120V, White, 3W, 4000K
		ELST8640B	120V, Black, 3W, 4000K
		ELST8640N	120V, Nickel, 3W, 4000K
		ELST8640BZ	120V, Bronze, 3W, 4000K
		ELST8640CP	120V, Copper, 3W, 4000K
	12V Ibis™ Round LED Step Light with Louver Faceplate 4 ¾″ O.D. - 2 ⅛″ I.D. - 1 3⁄16″ W	ELST8530W	12V, White, 3W, 3000K
		ELST8530B	12V, Black, 3W, 3000K
		ELST8530N	12V, Nickel, 3W, 3000K
		ELST8530BZ	12V, Bronze, 3W, 3000K
		ELST8530CP	12V, Copper, 3W, 3000K
		ELST8540W	12V, White, 3W, 4000K
		ELST8540B	12V, Black, 3W, 4000K
		ELST8540N	12V, Nickel, 3W, 4000K
		ELST8540BZ	12V, Bronze, 3W, 4000K
		ELST8540CP	12V, Copper, 3W, 4000K
	120V Ibis™ Round LED Step Light with Louver Faceplate 4 ¾″ O.D. - 2 ⅛″ I.D. - 1 3⁄16″ W	ELST8730W	120V, White, 3W, 3000K
		ELST8730B	120V, Black, 3W, 3000K
		ELST8730BZ	120V, Bronze, 3W, 3000K
		ELST8730BZ	120V, Bronze, 3W, 3000K
		ELST8730CP	120V, Copper, 3W, 3000K
		ELST8740W	120V, White, 3W, 4000K
		ELST8740B	120V, Black, 3W, 4000K
		ELST8740BZ	120V, Bronze, 3W, 4000K
		ELST8740BZ	120V, Bronze, 3W, 4000K
		ELST8740CP	120V, Copper, 3W, 4000K
Horizontal or Vertical 	120V Ibis™ Mini LED Step Light 4 ½″ L - 2 ¾″ H - 2″ W	ELST9930W	120V, White, 2.5W, 3000K
Horizontal or Vertical 	12V Ibis™ LED Step Light with Open Faceplate 5 ¼″ L - 3 ⅜″ H - 1 ⅞″ W	ELST9130W	12V, White, 2W, 3000K
		ELST9130B	12V, Black, 2W, 3000K
		ELST9130N	12V, Nickel, 2W, 3000K
		ELST9130BZ	12V, Bronze, 2W, 3000K
		ELST9130CP	12V, Copper, 2W, 3000K
		ELST9140W	12V, White, 2W, 4000K
		ELST9140B	12V, Black, 2W, 4000K
		ELST9140N	12V, Nickel, 2W, 4000K
		ELST9140BZ	12V, Bronze, 2W, 4000K
		ELST9140CP	12V, Copper, 2W, 4000K
	120V Ibis™ LED Step Light with Open Faceplate 5 ¼″ L - 3 ⅜″ H - 1 ⅞″ W	ELST9530W	120V, White, 2W, 3000K
		ELST9530B	120V, Black, 2W, 3000K
		ELST9530N	120V, Nickel, 2W, 3000K
		ELST9530BZ	120V, Bronze, 2W, 3000K
		ELST9530CP	120V, Copper, 2W, 3000K
		ELST9540W	120V, White, 2W, 4000K
		ELST9540B	120V, Black, 2W, 4000K
		ELST9540N	120V, Nickel, 2W, 4000K
		ELST9540BZ	120V, Bronze, 2W, 4000K
		ELST9540CP	120V, Copper, 2W, 4000K

LED **Pathway Lighting**

In-Ground, Brick and Step Lights

INTEGRATED LED | 93+ CRI | IN TODAY OUT TODAY

Ibis™ Diecast LED Step Lights

WET LOCATION

	Description	CAT. #	Specs
	12V Ibis™ LED Step Light with Angled Louver 3 ⅜″ L - 5 ¼″ H - 1 ⅞″ W	ELST9230W	12V, White, 2W, 3000K
		ELST9230B	12V, Black, 2W, 3000K
		ELST9230N	12V, Nickel, 2W, 3000K
		ELST9230BZ	12V, Bronze, 2W, 3000K
		ELST9230CP	12V, Copper, 2W, 3000K
		ELST9240W	12V, White, 2W, 4000K
		ELST9240B	12V, Black, 2W, 4000K
		ELST9240N	12V, Nickel, 2W, 4000K
		ELST9240BZ	12V, Bronze, 2W, 4000K
		ELST9240CP	12V, Copper, 2W, 4000K
	120V Ibis™ LED Step Light with Angled Louver 3 ⅜″ L - 5 ¼″ H - 1 ⅞″ W	ELST9630W	120V, White, 2W, 3000K
		ELST9630B	120V, Black, 2W, 3000K
		ELST9630N	120V, Nickel, 2W, 3000K
		ELST9630BZ	120V, Bronze, 2W, 3000K
		ELST9630CP	120V, Copper, 2W, 3000K
		ELST9640W	120V, White, 2W, 4000K
		ELST9640B	120V, Black, 2W, 4000K
		ELST9640N	120V, Nickel, 2W, 4000K
		ELST9640BZ	120V, Bronze, 2W, 4000K
		ELST9640CP	120V, Copper, 2W, 4000K
	12V Ibis™ LED Step Light with Angled Louver 5 ¼″ L - 3 ⅜″ H - 1 ⅞″ W	ELST9330W	12V, White, 2W, 3000K
		ELST9330B	12V, Black, 2W, 3000K
		ELST9330N	12V, Nickel, 2W, 3000K
		ELST9330BZ	12V, Bronze, 2W, 3000K
		ELST9330CP	12V, Copper, 2W, 3000K
		ELST9340W	12V, White, 2W, 4000K
		ELST9340B	12V, Black, 2W, 4000K
		ELST9340N	12V, Nickel, 2W, 4000K
		ELST9340BZ	12V, Bronze, 2W, 4000K
		ELST9340CP	12V, Copper, 2W, 4000K
	120V Ibis™ LED Step Light with Angled Louver 5 ¼″ L - 3 ⅜″ H - 1 ⅞″ W	ELST9730W	120V, White, 2W, 3000K
		ELST9730B	120V, Black, 2W, 3000K
		ELST9730N	120V, Nickel, 2W, 3000K
		ELST9730BZ	120V, Bronze, 2W, 3000K
		ELST9730CP	120V, Copper, 2W, 3000K
		ELST9740W	120V, White, 2W, 4000K
		ELST9740B	120V, Black, 2W, 4000K
		ELST9740N	120V, Nickel, 2W, 4000K
		ELST9740BZ	120V, Bronze, 2W, 4000K
		ELST9740CP	120V, Copper, 2W, 4000K
	12V Ibis™ LED Step Light with Scoop 3 ⅛″ L - 5 ⅛″ H - 1 ⅛″ W	ELST9430W	12V, White, 2W, 3000K
		ELST9430B	12V, Black, 2W, 3000K
		ELST9430N	12V, Nickel, 2W, 3000K
		ELST9430BZ	12V, Bronze, 2W, 3000K
		ELST9430CP	12V, Copper, 2W, 3000K
		ELST9440W	12V, White, 2W, 4000K
		ELST9440B	12V, Black, 2W, 4000K
		ELST9440N	12V, Nickel, 2W, 4000K
		ELST9440BZ	12V, Bronze, 2W, 4000K
		ELST9440CP	12V, Copper, 2W, 4000K
	120V Ibis™ LED Step Light with Scoop 3 ⅛″ L - 5 ⅛″ H - 1 ⅛″ W	ELST9830W	120V, White, 2W, 3000K
		ELST9830B	120V, Black, 2W, 3000K
		ELST9830N	120V, Nickel, 2W, 3000K
		ELST9830BZ	120V, Bronze, 2W, 3000K
		ELST9830CP	120V, Copper, 2W, 3000K
		ELST9840W	120V, White, 2W, 4000K
		ELST9840B	120V, Black, 2W, 4000K
		ELST9840N	120V, Nickel, 2W, 4000K
		ELST9840BZ	120V, Bronze, 2W, 4000K
		ELST9840CP	120V, Copper, 2W, 4000K

LED **Pathway Lighting**

In-Ground, Brick and Step Lights

Incandescent Step Lights

WET LOCATION

INTEGRATED LED · 93+ CRI · IN TODAY OUT TODAY

	Description	CAT. #	Specs
	Incandescent Step Light with Louvered Faceplate 8 ⅜″ L - 3 ⅝″ H - 3 ½″ W	ELST42W	120V, White, 40W
		ELST42B	120V, Black, 40W
		ELST42BZ	120V, Bronze, 40W
	Louvered Faceplate Replacements 9 ½″ L - 5″ H	ELST10W, B, BZ	For ELST42 Series
	Incandescent Step Light with Frosted Glass Lens 8 ⅜″ L - 3 ⅝″ H - 3 ½″ W	ELST43W	120V, White, 40W
		ELST43B	120V, Black, 40W
		ELST43BZ	120V, Bronze, 40W
	Open Faceplate Replacements 9 ½″ L - 5″ H	ELST1W, B, BZ	For ELST43 Series

For our full line of Brick, Step Lights & Accessories **visit elcolighting.com**



The **Ambio**™ Collection

24V Indoor LED Tape Light	284
24V Super Flexible Indoor LED Tape Light	286
24V Sunset Dimming LED Tape Light	286
Indoor LED Tape Light Accessories	286
24V Indoor Continuous LED Tape Light	287
RGB Indoor LED Tape Light & Accessories	288
24V Outdoor LED Tape Lights	288
Sectional LED Tape Lights & Accessories	289
Aluminum Channels for LED Tape Lights	290
24V DC Drivers	291
LED Duralight™ & Accessories	292
LED Flat Rope Light & Accessories	293
Magnetic & Electronic Transformers	293

The **Ambio**™ **Collection**

Architectural Grade LED TAPE Light

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED

24V Indoor LED Tape Light

	Description	CAT. #	Specs
 **0.9W/ft**	Custom Cut of 0.9W/ft LED Tape. 24V. Cuttable every 5″. 22 LED/ft. MAX. run 23ft. Strip width of 5⁄16″ (8mm)	E09-2427-CC	0.9W/ft, 146 lm/ft, 2700K
		E09-2430-CC	0.9W/ft, 155 lm/ft, 3000K
	16 foot roll of 0.9W/ft LED Tape. 24V. Cuttable every 5″. 22 LED/ft. MAX. run 23ft.	E09-2427-16	0.9W/ft, 146 lm/ft, 2700K
		E09-2430-16	0.9W/ft, 155 lm/ft, 3000K
	100 foot roll of 0.9W/ft LED Tape. 24V. Cuttable every 5″. 22 LED/ft. MAX. run 23ft.	E09-2427-100	0.9W/ft, 146 lm/ft, 2700K
		E09-2430-100	0.9W/ft, 155 lm/ft, 3000K
 **2.2W/ft**	Custom Cut of 2.2W/ft LED Tape. 24V. Cuttable every 8″. 9 LED/ft. MAX. run 39ft. Strip width of 25⁄64″ (10mm)	E22-2427-CC	2.2W/ft, 185 lm/ft, 2700K
		E22-2430-CC	2.2W/ft, 185 lm/ft, 3000K
		E22-2440-CC	2.2W/ft, 185 lm/ft, 4000K
	16 foot roll of 2.2W/ft LED Tape. 24V. Cuttable every 8″. 9 LED/ft. MAX. run 39ft.	E22-2427-16	2.2W/ft, 185 lm/ft, 2700K
		E22-2430-16	2.2W/ft, 185 lm/ft, 3000K
		E22-2440-16	2.2W/ft, 185 lm/ft, 4000K
	100 foot roll of 2.2W/ft LED Tape. 24V. Cuttable every 8″. 9 LED/ft. MAX. run 39ft.	E22-2427-100	2.2W/ft, 185 lm/ft, 2700K
		E22-2430-100	2.2W/ft, 185 lm/ft, 3000K
		E22-2440-100	2.2W/ft, 185 lm/ft, 4000K
 **2.9W/ft**	Custom Cut of 2.9W/ft LED Tape. 24V. Cuttable every 5″. 15 LED/ft. MAX. run 26.2ft. Strip width of 5⁄16″ (8mm)	E31-2427-CC	2.9W/ft, 231.7 lm/ft, 2700K
		E31-2430-CC	2.9W/ft, 243.9 lm/ft, 3000K
	16 foot roll of 2.9W/ft LED Tape. 24V. Cuttable every 5″. 15 LED/ft. MAX. run 26.2ft.	E31-2427-16	2.9W/ft, 231.7 lm/ft, 2700K
		E31-2430-16	2.9W/ft, 243.9 lm/ft, 3000K
	100 foot roll of 2.9W/ft LED Tape. 24V. Cuttable every 5″. 15 LED/ft. MAX. run 26.2ft.	E31-2427-100	2.9W/ft, 231.7 lm/ft, 2700K
		E31-2430-100	2.9W/ft, 243.9 lm/ft, 3000K
 **4.3W/ft**	Custom Cut of 4.3W/ft LED Tape. 24V. Cuttable every 3″. 24 LED/ft. MAX. run 32.8ft. Strip width of 9⁄16″ (8mm)	E42-2427-CC	4.3W/ft, 372 lm/ft, 2700K
		E42-2430-CC	4.3W/ft, 384 lm/ft, 3000K
		E42-2435-CC	4.3W/ft, 396 lm/ft, 3500K
	16 foot roll of 4.3W/ft LED Tape. 24V. Cuttable every 3″. 24 LED/ft. MAX. run 32.8ft.	E42-2427-16	4.3W/ft, 372 lm/ft, 2700K
		E42-2430-16	4.3W/ft, 384 lm/ft, 3000K
		E42-2435-16	4.3W/ft, 396 lm/ft, 3500K
	100 foot roll of 4.3W/ft LED Tape. 24V. Cuttable every 3″. 24 LED/ft. MAX. run 32.8ft.	E42-2427-100	4.3W/ft, 372 lm/ft, 2700K
		E42-2430-100	4.3W/ft, 384 lm/ft, 3000K
		E42-2435-100	4.3W/ft, 396 lm/ft, 3500K

The **Ambio™ Collection**

Architectural Grade LED TAPE Light

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED

24V Indoor LED Tape Light

	Description	CAT. #	Specs
 **4.4W/ft**	Custom Cut of 4.4W/ft. HIGH DENSITY LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 26ft. Strip width of 25⁄64" (10mm)	E45-2427-CC	4.4W/ft, 450 lm/ft, 2700K
		E45-2430-CC	4.4W/ft, 450 lm/ft, 3000K
		E45-2440-CC	4.4W/ft, 450 lm/ft, 4000K
	16 foot roll of 4.4W/ft. HIGH DENSITY LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 26ft.	E45-2427-16	4.4W/ft, 450 lm/ft, 2700K
		E45-2430-16	4.4W/ft, 450 lm/ft, 3000K
		E45-2440-16	4.4W/ft, 450 lm/ft, 4000K
	100 foot roll of 4.4W/ft HIGH DENSITY LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 26ft. Strip width of 25⁄64" (10mm)	E45-2427-100	4.4W/ft, 450 lm/ft, 2700K
		E45-2430-100	4.4W/ft, 450 lm/ft, 3000K
		E45-2440-100	4.4w/ft, 450 lm/ft, 4000K
 **5W/ft**	Custom Cut of 5W/ft LED Tape. 24V. Cuttable every 1". 81 LED/ft. MAX. run 13ft. Strip width of 25⁄64" (10mm)	E50-2427-CC	5W/ft, 500 lm/ft, 2700K
		E50-2430-CC	5W/ft, 500 lm/ft, 3000K
		E50-2440-CC	5W/ft, 500 lm/ft, 4000K
	16 foot roll of 5W/ft LED Tape. 24V. Cuttable every 1". 81 LED/ft. MAX. run 13ft.	E50-2427-16	5W/ft, 500 lm/ft, 2700K
		E50-2430-16	5W/ft, 500 lm/ft, 3000K
		E50-2440-16	5W/ft, 500 lm/ft, 4000K
	100 foot roll of 5W/ft LED Tape. 24V. Cuttable every 1".81 LED/ft. MAX. run 13ft.	E50-2427-100	5W/ft, 500 lm/ft, 2700K
		E50-2430-100	5W/ft, 500 lm/ft, 3000K
		E50-2440-100	5W/ft, 500 lm/ft, 4000K
 **6W/ft**	Custom Cut of 6W/ft LED Tape. 24V. Cuttable every 2". 48 LED/ft. MAX. run 13ft. Strip width of 25⁄64" (10mm)	E60-2427-CC	6W/ft, 550 lm/ft, 2700K
		E60-2430-CC	6W/ft, 550 lm/ft, 3000K
		E60-2440-CC	6W/ft, 550 lm/ft, 4000K
	16 foot roll of 6W/ft LED Tape. 24V. Cuttable every 2". 48 LED/ft. MAX. run 13ft.	E60-2427-16	6W/ft, 550 lm/ft, 2700K
		E60-2430-16	6W/ft, 550 lm/ft, 3000K
		E60-2440-16	6W/ft, 550 lm/ft, 4000K
	100 foot roll of 6W/ft LED Tape. 24V. Cuttable every 2". 48 LED/ft. MAX. run 13ft.	E60-2427-100	6W/ft, 550 lm/ft, 2700K
		E60-2430-100	6W/ft, 550 lm/ft, 3000K
		E60-2440-100	6W/ft, 550 lm/ft, 4000K
 **8.8W/ft**	Custom Cut of 8.8W/ft LED Tape. 24V. Cuttable every 1". 73 LED/ft. MAX. run 15ft. Strip width of 35⁄64" (14mm)	E80-2427-CC	8.8W/ft, 800 lm/ft, 2700K
		E80-2430-CC	8.8W/ft, 800 lm/ft, 3000K
		E80-2440-CC	8.8W/ft, 800 lm/ft, 4000K
	16 foot roll of 8.8W/ft LED Tape. 24V. Cuttable every 1". 73 LED/ft. MAX. run 15ft.	E80-2427-16	8.8W/ft, 800 lm/ft, 2700K
		E80-2430-16	8.8W/ft, 800 lm/ft, 3000K
		E80-2440-16	8.8W/ft, 800 lm/ft, 4000K
	100 foot roll of 8.8W/ft LED Tape. 24V. Cuttable every 1". 73 LED/ft. MAX. run 15ft.	E80-2427-100	8.8W/ft, 800 lm/ft, 2700K
		E80-2430-100	8.8W/ft, 800 lm/ft, 3000K
		E80-2440-100	8.8W/ft, 800 lm/ft, 4000K

The **Ambio**™ **Collection**

Architectural Grade LED TAPE Light

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED

24V Super Flexible Indoor LED Tape Lights

	Description	CAT. #	Specs
 **1.8W/ft**	Custom Cut. Strip width of 8mm (5⁄16″). Cuttable every 4″. 18 LED/ft. MAX. run 26 ft.	EF26-24WW-CC	1.8W/ft, 200 lm/ft, 3000K
		EF26-24CW-CC	1.8W/ft, 200 lm/ft, 6500K
	16 foot rolls. Strip width of 8mm (5⁄16″). Cuttable every 4″. 18 LED/ft. MAX. run 26 ft.	EF26-24WW-16	1.8W/ft, 200 lm/ft, 3000K
		EF26-24CW-16	1.8W/ft, 200 lm/ft, 6500K

24V Sunset Dimming Indoor LED Tape Lights

DIMS TO WARM
SUNSET DIMMING TECHNOLOGY

	Description	CAT. #	Specs
 **3.5W/ft**	Custom Cut 3.5W/ft LED Tape Light. 24V Cuttable every 2.5″ or every 14 LED's MAX. run 13ft. Strip width of 25⁄64″ (10mm)	E36-24SD	Warm White, 3.5W/ft, Sunset
	16 foot roll of 3.5W/ft LED Tape Light. 24V. Cuttable every 2.5″ or every 14 LED's MAX. run 13ft.	E36-24SD-16	Warm White, 3.5W/ft, Sunset

Indoor LED Tape Light Accessories

	Description	CAT. #	Specs
	Strip to Strip Connector	EPSD21	2-conductor end-to-end for single color tape light. For connecting two tape lights together
	10″ Hardwire Connector	EPSD22	10″ wire leads for single color tape lights, for connecting tape lights to LED driver
	120″ Hardwire Connector	EPSD22-120	120″ wire leads for single color tape lights, for connecting tape lights to LED driver
	10″ Extension Connector	EPSD23	10″ wire leads for single color tape lights, for connecting two tape lights at a 10″ distance

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The **Ambio™ Collection**

Architectural Grade LED TAPE Light

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED

Indoor LED Tape Light Accessories

	Description	CAT. #	Specs
	2″ Extension Connector for Connecting 2-Tape Lights	EPSD23-2	2″ wire leads for single color tape lights
	24″ Extension Connector for Connecting 2-Tape Lights	EPSD24	24″ wire leads for single color tape lights
	DC Power Adapter	EPSD25	6″ wire for single color tape lights, for connecting tape light to plug-in power supplies
	Tape to Wire Block Connector	EPSD19	Screw down connector for connecting tape light to wire
	Diamond Screw Down Connector	EPSD20	For connecting two tape lights together without any soldering
	Tape-to-Power Diamond Connector with Wire	For use as a lead wire to tape light connector. Screwdriver included to tighten screws to secure tape light	
		EPSD26	6″ wire with connector
		EPSD26-60	60″ wire with connector
		EPSD26-72	72″ wire with connector
	L Shape Block Connector	EPSD27L	For 10MM tape lights

24V Indoor Continuous COB LED Tape Light

	Description	CAT. #	Specs
 **3W/ft**	Custom Cut. Strip width of 8mm (5⁄16″). Cuttable every 1 25⁄32″. MAX. run 16 ft.	E30CB-2427	3W/ft, 245 lm/ft, 2700K
		E30CB-2430	3W/ft, 260 lm/ft, 3000K
		E30CB-2440	3W/ft, 275 lm/ft, 4000K
	100 ft. roll of 3W/ft LED Continuous Tape Light. Cuttable every 1 25⁄32″. MAX. run 16 ft.	E30CB-2427-100	3W/ft, 245 lm/ft, 2700K
		E30CB-2430-100	3W/ft, 260 lm/ft, 3000K
		E30CB-2440-100	3W/ft, 275 lm/ft, 4000K
 **4.5W/ft**	Custom Cut. Strip width of 10mm (25⁄64″). Cuttable every 1 25⁄32″. MAX. run 16 ft.	E44CB-2427	4.5W/ft, 365 lm/ft, 2700K
		E44CB-2430	4.5W/ft, 385 lm/ft, 3000K
		E44CB-2440	4.5W/ft, 425 lm/ft, 4000K
	100 ft. roll of 3W/ft LED Continuous Tape Light. Cuttable every 1 25⁄32″. MAX. run 16 ft.	E44CB-2427-100	4.5W/ft, 365 lm/ft, 2700K
		E44CB-2430-100	4.5W/ft, 385 lm/ft, 3000K
		E44CB-2440-100	4.5W/ft, 425 lm/ft, 4000K

Indoor Continuous COB LED Tape Light Accessories

	Description	CAT. #	Specs
	Tape-to-Tape Light Mini Connector	EPSD21CB8	For E30CB Tape Light Series
		EPSD21CB10	For E44CB Tape Light Series
	10″ Hardwire Connector	EPSD22CB8	For E30CB Tape Light Series
		EPSD22CB10	For E44CB Tape Light Series
	Tape-to-Tape with 10″ Wire	EPSD23CB8	For E30CB Tape Light Series
		EPSD23CB10	For E44CB Tape Light Series
	Tape-to-Tape Light L-Connector	EPSD27LCB8	For E30CB Tape Light Series
		EPSD27LCB10	For E44CB Tape Light Series
	Tape-to-Tape Light X-Connector	EPSD28XCB8	For E30CB Tape Light Series
		EPSD28XCB10	For E44CB Tape Light Series

The **Ambio**™ **Collection**

Architectural Grade LED TAPE Light

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED

RGB Indoor LED Tape Light

	Description	CAT. #	Specs
	Custom Cut RGB Tape Strip width of 25⁄64″ (10mm)	E44-24M-CC	4.4w/ft, 165 lm/ft, RGB
	16 ft. roll RGB Tape	E44-24M-16	4.4w/ft, 165 lm/ft, RGB
	100 ft. roll RGB Tape	E44-24M-100	4.4w/ft, 165 lm/ft, RGB

RGB Indoor LED Tape Light Accessories

	Description	CAT. #	Specs
	Touch Wall Panel RGB Controller	ECN12	24V DC Input
	Wireless signal receiver	ECN14-1	24V DC Input, Maximum load of 216W
	RGB Remote Controller	ECN14-2	Infrared (IR) remote controller
	Hardwire Connector for connecting multi-color (RGB) tape lights to LED Driver	EPS26	Fits RGB tape lights with 10″ wire leads
		EPS29	Fits RGB tape lights with 24″ wire leads
	Extension Connector for connecting two multi-color (RGB) tape lights at a distance	EPS27	Fits RGB tape lights with 10″ wire leads
		EPS28	Fits RGB tape lights with 24″ wire leads

24V Damp Location LED Tape Light

	Description		CAT. #	Specs
 **4.4W/ft**	Custom Cut of Outdoor 4.4w/ft LED Tape 24V. Cuttable every 4″. 18 LED/ft. MAX. run 16ft. Strip width of 25⁄64″ (10mm)	DAMP LOCATION	EW44-2427-CC	4.4w/ft, 360 lm/ft, 2700K
			EW44-2430-CC	4.4w/ft, 360 lm/ft, 3000K
			EW44-2440-CC	4.4w/ft, 360 lm/ft, 4000K
	16 foot roll of Outdoor 4.4w/ft LED Tape 24V. Cuttable every 4″. 18 LED/ft. MAX. run 16ft.	DAMP LOCATION	EW44-2427-16	4.4w/ft, 360 lm/ft, 2700K
			EW44-2430-16	4.4w/ft, 360 lm/ft, 3000K
			EW44-2440-16	4.4w/ft, 360 lm/ft, 4000K
	Custom Cut of Outdoor 4.4w/ft HIGH DENSITY LED Tape. 24V. Cuttable every 2″. 36 LED/ft. MAX. run 16ft.	DAMP LOCATION	EW45-2427-CC	4.4w/ft, 450 lm/ft, 2700K
			EW45-2430-CC	4.4w/ft, 450 lm/ft, 3000K
			EW45-2440-CC	4.4w/ft, 450 lm/ft, 4000K
	16 foot roll of Outdoor 4.4w/ft HIGH DENSITY LED Tape. 24V. Cuttable every 2″. 36 LED/ft. MAX. run 16ft.	DAMP LOCATION	EW45-2427-16	4.4w/ft, 450 lm/ft, 2700K
			EW45-2430-16	4.4w/ft, 450 lm/ft, 3000K
			EW45-2440-16	4.4w/ft, 450 lm/ft, 4000K

The **Ambio™ Collection**

Architectural Grade LED TAPE Light

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED

Sectional LED Tape Lights

	Description	CAT. #	Specs
	Non-Waterproof LED Tape Light Strip width of 5/16" (8mm)	E460-24WW	Warm White, 1.5W/ft, 3000K
		E460-24CW	Cool White, 1.5W/ft, 6500K
		E1460-24WW	Warm White, 4.4W/ft, 3000K
		E1460-24CW	Cool White, 4.4W/ft, 6500K

Sectional LED Tape Light Accessories

	Description	CAT. #	Specs
	Power Connector	EPN11	6′ Power connector for WW and CW Tape Lights only
	Tape Light Connector for WW and CW types only	EPS12	20″ Cut tape connector for E460 and EWP460 tapes
		EPS13	20″ Cut tape connector for E1460 and EWP1460 tapes
	Tape Light Linking Cable for WW and CW types only	EPSD1	1′ Linking Cable for E460 & EWP460 tapes

The **Ambio**™ **Collection**

Architectural Grade LED TAPE Light

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED

Aluminum Channels for LED Tape

	Description	CAT. #	Specs
	Custom Cut Shallow Mount LED Aluminum Channel	EUD31	Custom Cut Channel
	8′ Shallow Mount LED Aluminum Channel	EUD31-8	8′ Channel w/lens & connectors
	Custom Cut Deep Mount LED Aluminum Channel	EUD32	Custom Cut Channel
	8′ Deep Mount LED Aluminum Channel	EUD32-8	8′ Channel w/lens & connectors
	Custom Cut Recessed Mount LED Aluminum Channel	EUD33	Custom Cut Channel
	8′ Recessed Mount LED Aluminum Channel	EUD33-8	8′ Channel w/lens & connectors
	Custom Cut Square Corner Mount LED Aluminum Channel	EUD34	Custom Cut Channel
	8′ Square Corner Mount LED Aluminum Channel	EUD34-8	8′ Channel w/lens & connectors
	Custom Cut Surface Mount LED Aluminum Channel	EUD35	Custom Cut Channel
	8′ Surface Mount LED Aluminum Channel	EUD35-8	8′ Channel w/lens & connectors
	Custom Cut Round Corner Mount LED Aluminum Channel	EUD36	Custom Cut Channel
	8′ Round Corner Mount LED Aluminum Channel	EUD36-8	8′ Channel w/lens & connectors
	Custom Cut Shallow Recessed Mount LED Aluminum Channel	EUD37	Custom Cut Channel
	8′ Shallow Recessed Mount LED Aluminum Channel	EUD37-8	8′ Channel w/lens & connectors
	Custom Cut Trimless Recessed Aluminum Channel	EUD38	Custom Cut Channel
	8′ Trimless Recessed Aluminum Channel	EUD38-8	8′ Channel w/lens & connectors

8′ Channel are approximately 7′8″

Aluminum Channels Accessories

	Description	CAT. #	Specs
	End Caps for Aluminum Channels (Set of 2)	EUDEN31	For EUD31
		EUDEN32	For EUD32
		EUDEN33	For EUD33
		EUDEN34	For EUD34
		EUDEN35	For EUD35
		EUDEN36	For EUD36
		EUDEN37	For EUD37
	8 Ft. Frosted Lens for Aluminum Channels	EUDL31	For EUD31, 32, 37
		EUDL33	For EUD33
		EUDL34	For EUD34
		EUDL35	For EUD35
		EUDL36	For EUD36
	8 Ft. Clear Lens for Aluminum Channels	EUDL31C	For EUD31, 32, 37
		EUDL33C	For EUD33
		EUDL34C	For EUD34
		EUDL35C	For EUD35
		EUDL36C	For EUD36
	Mounting Clips for Aluminum Channels (Set of 2)	EUDMT31	For EUD31
		EUDMT32	For EUD32
		EUDMT33	For EUD33
		EUDMT34	For EUD34
		EUDMT35	For EUD35
		EUDMT36	For EUD36
		EUDMT37	For EUD37

The **Ambio™ Collection**

Architectural Grade LED TAPE Light

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED

24V DC Drivers


	Description	CAT. #	Specs
	24V DC Electronic Driver ELV Dimmable 3″ L - 1″ H - 1″ W	DRVE24V60W	60W
	24V Electronic Driver NON-Dimmable	DRV30W	30W, 120/277V
		DRV100W	100W, 120/277V
	0-10V Dimmable Driver	DRV30W-10	30W, 0-10V, 120/277V
		DRV60W-10	60W, 0-10V, 120/277V
		DRV96W-10	96W, 0-10V, 120/277V
	Universal Dimmable LED Driver/Transformer (Small) 6 ½″ L - 1 ¾″ H - 3 ½″ W	DRVU24V24WD	24W, 24V DC, 1A
		DRVU24V60WD	60W, 24V DC, 2.5A
	Universal Dimmable LED Driver/Transformer (Medium) 8 ¾″ L - 1 ¾″ H - 3 ½″ W	DRVU24V100WD	100W, 24V DC, 4A
	Universal Dimmable LED Driver/Transformer (Large) 9 ⅞″ L - 1 ¾″ H - 4 ⅛″ W	DRVU24V200WD	200W, 24V DC, 8A
	Universal Dimmable LED Driver/Transformer (X-Large) 10 ⅞″ L - 1 ¾″ H - 4 ⅛″ W	DRVU24V300WD	300W, 24V DC, 12A
	Dimmer with Built-In Driver with On/Off Switch	DIMTP2	60W, 120V Input
		DIMTP3	100W, 120V Input

The **Ambio™ Collection**

Architectural Grade LED TAPE Light

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED

Duralight™ & Accessories

	Description	CAT. #	Specs
	2 Wire 110/120V Duralight™ Connectable up to 150 feet. Cuttable at 36" increments (every 24 bulbs only) 	EDU2	Custom Cut, Clear
		EDU2-150	150 ft per roll (Max run), Clear
	150' Reel OUTDOOR 120V LED Rope Light	EDU2LEDWW-CC	Custom Cut, 0.96W/ft, 76 lm/ft, Warm White
		EDU2LEDWW150	150′ Reel, 0.96W/ft, 76 lm/ft, Warm White
		EDU2LEDCW-CC	Custom Cut, 0.96W/ft, 76 lm/ft, Cool White
		EDU2LEDCW150	150′ Reel, 0.96W/ft, 76 lm/ft, Cool White
	Mini Controller with power cord and rope light connector	ECN6	8 functions, 95 ft. MAX. for LED Duralights
	Power Cord	EPC2	6 ft. Power Cord for EDU2
	Power Cord	EPCLED	Power Cord for EDU2LED
	Power Connector	EPN2	For EPCLED
	Splice Connector	EPS2	
	Plastic Mounting Clips	EPMT	
	End Cap	EPEN	
	6 ft. Channel	EPCH	
	Invisible Splice	EPIN	

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

The **Ambio™ Collection**

Architectural Grade LED TAPE Light

93+ CRI | IN TODAY OUT TODAY | 50,000 HOURS | 5 YEAR WARRANTY | INTEGRATED LED

LED Flat Rope Light & Accessories

	Description	CAT. #	Specs
	120V Flat LED Rope Light Strip width of ½" (12mm)	EDF12WW-90	90', 0.5W/ft, 76 lm/ft, Warm White
		EDF11WW-90	90', 1W/ft, 100 lm/ft, Warm White
		EDF21WW-30	30', 3W/ft, 150 lm/ft, Warm White
	Power Cord	EFPC61	6' Power Cord & Driver for EDF11 & EDF12
		EFPC62	6' Power Cord & Driver for EDF21
	Splice Connector	EFPS21	Splice connector for EDF11 & EDF12
		EFPS22	Splice connector for EDF21
	End Cap	EFPEN1	End Cap for EDF11 & EDF12
		EFPEN2	End Cap for EDF21
	Glue Tube	EFPGL	For end caps, power cord and splice connector
	Mounting Clip	EPD-4	For EDF11 & EDF12
		EPD-7	For EDF21
	Open Mounting Clip	EPD-8	For EDF11 & EDF12

Transformers

	Description	CAT. #	Specs
	Miniature Electronic Transformer	LET-75	12V AC, 75W. 2 ⅛" L - ¾" H - 1 ¼" W
	Electronic Transformer (No Minimum Load)	LET-60	120V, 60W. 2 ¼" L - ¾" H - 1 ¼" W
		LET-60-277	277V, 60W
	Electronic Transformer (Bottom Load)	LET-60H	120V, 60W. 2 ¾" L - ¾" H - 1 ¼" W
	0-10V Dimmable Electronic Transformer	LET-60DX	0-10V, 120V, 60W
		LET-60DX-277	0-10V, 277V, 60W

Magnetic & Electronic Transformers 120V & 277V to 12V or 277V to 120V

	Description	CAT. #	Specs
	Low Voltage Magnetic Transformer	ETR12	120/12V, 50W, for EL1499 & EL2699. 1 ⅞" L - 3" H - 2 ¼" W
		ETR12-20	120/12V, 20W, for EL1499LD
		ETR-277	Steps 277V Line Voltage Down to 120V, 250W
	Low Voltage Magnetic Transformer for Retrofit Kit	ETRK50	120V/12V, 50W, Medium Screw Base
		ETRK20	120V/12V, 20W
	Electronic Transformer	ETRK60E	for Retrofit Kit 120V/12V, 60W, Low load (3W-50W)

Lamps, Socket Adapters, & General Accessories



Accessories for Recessed Fixtures	295
LED Lamps	297
JC & Wedge Lamps	298
Metal & Plastic Rings	298
Ballast	299
Junction Box & Cover	299
Fire Rated Products	300
Adjustable and Trimless Hole Saws	301
Emergency Battery Backups	303
ELCO LED Ceiling Displays	304
ELCO Countertop Mats	305
ELCO Travel Cases	306
ELCO Countertop Displays	306

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs


Accessories for Recessed Fixtures

	Description	CAT. #	Specs
	Lens for MR16 Units	L28	Clear Lens, 1 15/16″ D, 49 mm
		L38	Honey Comb Louver
		L39	Honeycomb Louver Lens, Mill Brite
		L40	Clear UV Filter, 49 mm
		L41	Frosted UV Filter, 49 mm
		L42	3 5/8″ Diffused Spread Lens for PAR30
		L44	3 5/8″ Soft Focus Lens for PAR30
	Lens Retainer Ring	RTNRTRK1	For ET528, ET532 & ET547
	Retainer Ring & Lens	RTNRTRK2	For MR11 Track Heads
	Lampholder Clip	CLIP200	For ET226, ET239
	GU24 Socket Adapter	PSA21	Socket Adapter Medium Screw into GU-24
	Socket Adapter	PSA25	Socket Adapter for HALO 5″ Trims to fit Elco Housings
	Socket Extender	PSE26	
	Socket Adapter	PSA27	For 4″ Eyeball to fit HALO Housing
	GU10 Socket	PSA29	Med. screw-in to GU10 with Lamp (50W, 120V, MR16, GU10 Base)
	E26 Medium Base Adapter	PSA30	Med. base to LED Quick Connect
	GU10 Base Adapter	PSA31	GU10 to LED Quick Connect
	Socket Adapter	PSA32	Med. screw into GU10 without lamp
	Socket Adapter	PSA33	Med. screw into GU10 with lamp

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs

Accessories for Recessed Fixtures

	Description	CAT. #	Specs
	Dimmable MR16 Sized Lamp with Quick Connect and medium base adapter, For use in Medium Base Housings with MR16 Trims. See **elcolighting.com** for full trim and housing selection	PSA34-27	7W, 530 lm, 2700K
		PSA34	7W, 500 lm, 3000K
		PSA34-35	7W, 530 lm, 3500K
		PSA34-40	7W, 550 lm, 4000K
	GU10 Socket	P010S	GU10 Socket with Wire
	E26 Socket	P011S	E26 Base phenolic socket with 6″ wire
	Socket Assembly	P012S	Socket, wire and thermal protector for EL71C & R10H
	GU24 Socket	P024S	GU-24 Socket with 18″ wire
	Socket for MR16	P016S	for MR16 with 24″ wires
		P006S	for MR16 W/6″ wires, no disk
	Screw Base Adapter	P010T	Phenolic Screw Base Adapter with 8″ Pigtail Wires
	Coil Spring	SPRING	Coil Spring for ELM30
	Torsion Spring for Trims	V-SPRING	
	Flat Hanger Bars	FB27	Set of two 27″ flat hanger bars for commercial frames. For wood construction
	Hanger Bars	HB24	Set of two Hanger Bars for Plaster Frames. Extend to 24″, perforated easy cut at 8″ & 10″
	Hanger Bars	CH26	Set of two 26″ C-Channel Hanger Bars for Commercial Housings. For T-Bar ceiling
	J-Box Cover	JBOXCV	J-Box cover for housings
	Insulation Sensor	RP-1B	For 120V Only
	Clip-R	CLIP-R	Set of 3 Clips for Remodel Housings
	Clip-C	CLIP-C	Set of Clips for Torsion Springs
	Socket Plate with screw and wing nut	L-BRCKT	for 6″ Housings
		L-BRCKT4	for 4″ Housings
		L-BRCKT5	for 5″ Housings

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs

LED Lamps

	Description	CAT. #	Specs
	Dimmable MR16 Sized Lamp with Quick Connect, For use in LED Quick Connect Housings with MR16 Trims. See **elcolighting.com** for full trim and housing selection	PSA37-27	7W, 500 lm, 2700K
		PSA37	7W, 500 lm, 3000K
		PSA37-35	7W, 530 lm, 3500K
		PSA37-40	7W, 550 lm, 4000K
	Quick Connect A-Lamp For Construction Site	PSA41-40	12W, 1000 lm, 4000K
	12V LED Low Voltage Bi-Pin Lamp	MR16LD	7W, 500 lm, 3000K
	120V GU10 LED Lamp	MR120-GU10LD	7W, 500 lm, 3000K

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs

Wedge Base Lamps

	Description	CAT. #	Specs
	Xenon Wedge Base Lamp	WB-18-Z	18W, 12V, Clear

JC & Wedge Base Lamps

	Description	CAT. #	Specs
	Lamp, G-8 Base, 40° Flood	JC-25	25W, 12V, Bi-Pin Lam, for EUC22
		JC-50	50W, 120V, JC Lamp G8
		JC-50-12V	50W, 12V, JC Lamp

Metal & Plastic Rings

	Description	CAT. #	Specs
	3″ Metal Ring	RM3W	White, 4 ¼″ O.D.
		RM3B	Black, 4 ¼″ O.D.
		RM3C	Clear, 4 ¼″ O.D.
		RM3G	Gold, 4 ¼″ O.D.
		RM3N	Nickel, 4 ¼″ O.D.
		RM3BZ	Bronze, 4 ¼″ O.D.
		RM3CP	Copper, 4 ¼″ O.D.
	4″ Ring	RM4W	White, 4 ¾″ O.D.
		RM4B	Black, 4 ¾″ O.D.
		RM4G	Gold, 4 ¾″ O.D.
		RM4N	Nickel, 4 ¾″ O.D.
		RM4BZ	Bronze, 4 ¾″ O.D.
		RM4CP	Copper, 4 ¾″ O.D.
		RP4SH	Plastic Ring, 4 ¾″ O.D.
	4″ Oversized Metal Ring	OM4W	White, 4 ¾″ O.D.
		OM4B	White, 4 ¾″ O.D.
	5″ Metal Ring	RM5W	White, 6 ¼″ O.D.
		RM5B	Black, 6 ¼″ O.D.
		RM5C	Clear, 6 ¼″ O.D.
		RM5G	Gold, 6 ¼″ O.D.
		RM5N	Nickel, 6 ¼″ O.D.
		RM5BZ	Bronze, 6 ¼″ O.D.
		RM5CP	Copper, 6 ¼″ O.D.
	5″ Oversized Metal Ring	OM5W	White, 7 ¼″ O.D.
		OM5B	Black, 7 ¼″ O.D.
	6″ Metal & Plastic Ring	RM7W	White, 7 ¼″ O.D.
		RM7B	Black, 7 ¼″ O.D.
		RM7C	Clear, 7 ¼″ O.D.
		RM7N	Nickel, 7 ¼″ O.D.
		RM7BZ	Bronze, 7 ¼″ O.D.
		RM7CP	Copper, 7 ¼″ O.D.
		RP7W	White Plastic Ring, 7 ¼″ O.D.
		RP7B	Black Plastic Ring, 7 ¼″ O.D.
	6″ Oversized Plastic & Metal Ring	OVP7W	White Plastic, 8″ O.D.
		OVP7B	Black Plastic, 8″ O.D.
		OVM7W	White Metal, 8″ O.D.
		OVM7B	Black Metal, 8″ O.D.
		OVM7BZ	Bronze Metal, 8″ O.D.

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs

Metal & Plastic Rings

	Description	CAT. #	Specs
	7″ Plastic Ring	RP8W	White, 7 ½″ O.D.
	8″ Plastic Ring	RP9W	White, 8 ¼″ O.D.

Ballast

	Description	CAT. #	Specs
	Electronic Ballast	P113E1	13W, 120V
		P126E1	26W, 120V
		P142EU	26W - 42W, 120/277V
	Electronic Ballast	PWH2E1	32/26/18/13W, 120V


Junction Boxes and Cover

	Description	CAT. #	Specs
	2″x4″ Junction Box	ELJ242	Galvanized steel corrosion resistant, (11) ⅞″ knockouts 4″ L x 2 ⅛″ W x 1 ⅜″ H
	2″x4″ Junction Box Cover	ELJ242CVR	4 ¼″ L x 1 ⅜″ W
	Square IC Airtight Junction Box	ELJ443	4″ Sq. x 3 ½″ H
	Square New Construction IC Airtight Junction Box	ELJ4S	3 ¾″ Sq. x 2 ⅜″ H

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs

Fire Products

	Description	CAT. #	Specs
	1-Hour Fire Enclosure	FIREENCL	20 ⅜″ L - 14 ⅜″ W - 9″ H
		FIREENCL-S	Shallow 16″ L - 14 ⅜″ W - 7 ¼″ H
	Mica Fire tape for use with FIREENCL	FIRETAPE	16' Roll
	Recessed Fixture 2-Hour Fire Rated Cover	FIRECVR	Made of heat activated intumescent material. 17″ O.D. - 13″ I.D. - 9 ¾″ H
	2-Hour Fire Rated LED Housings with Quick Connect	EL39FICA	3″ LED Housing. 7 ¾″ Height
		EL48FICA	4″ LED Housing. 6 ⅞″ Height
		EL56FICA	5″ LED Housing. 7 ¾″ Height
		EL76FICA	6″ LED Housing. 7 ¾″ Height
	2-Hour Fire Rated Medium Base Housing with E26 Base Socket	EL99FICA	4″ LED Housing. 7 ¾″ Height
		EL5FICA	5″ LED Housing. 7 ¾″ Height
		EL7FICA	6″ LED Housing. 7 ¾″ Height
	2-Hour Fire Rated Housing with GU10 Socket	EL39FICA-GU10	3″ LED Housing. 7 ¾″ Height
		EL49FICA-GU10	4″ LED Housing. 7 ¾″ Height
	2-Hour Fire Rated Shallow Housing	EL492FICAS	4″ LED Shallow Housing 4 13⁄16″ Height
	2-Hour Fire Rated Shallow Housing	EL75FICAS	6″ LED, Shallow Housing 6 3⁄16″ Height
	4″ New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4ICA	4″ Housing. 4 ½″ Height
		EJB4ICA-EM5	Housing with Emergency Battery Back-Up. 4 ½″ Height
	4″ Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4RICA	4″ Housing. 4 ½″ Height
		EJB4RICA-EM5	Remodel Housing with Emergency Battery Back-Up. 4 ½″ Height
	New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings	EL276JBICA	2″ Housing. 4″ Height
		EL386JBICA	3″ Housing. 4″ Height
		EJB483ICA	4″ Housing. 4″ Height

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com

Adjustable & Trimless Hole Saws



EL5000/EL6000

Adjustable Hole Cutter

EL5000: Medium Unit, Cuts 1 ¼" to 6 ½"

EL6000: Large Unit, Cuts 2" to 8 ¼"

- For cutting drywall, wood, plaster and acrylic sheeting up to ⅞" thick and metal sheets up to 1/16" thick.
- Supplied with transparent cowl to prevent chips from injuring user.
- Also supplied with two blades, balance bars and adjusting wrench in a handy tool box.
- Works with either variable speed hand drill or drill press.

4" Trimless Hole Saw

EL4500: Cuts 4 ⅛" through hole and 7 5/8" counterbore for spackle frame (EL4SFR).

- For cutting drywall, wood and plaster
- Supplied with transparent cowl to prevent chips from injuring user.
- Also supplied with 4 ⅛" tungsten carbide tipped (TCT) hole saw, cutting plate and tool box.
- Works with variable speed hand drill.



EL4500

EL5500



Adjustable Hole Cutter

EL5500 Medium Unit, Cuts 1 9/16" to 7 ⅞"

- For cutting drywall, wood, plaster and acrylic sheeting up to ⅞" thick and metal sheets up to 1/16" thick.
- Supplied with transparent cowl to prevent chips from injuring user.
- Also supplied with two blades, balance bars and adjusting wrench in a handy tool box.
- Works with either variable speed hand drill or drill press.

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs

Hole Saw for Trimless

	Description	CAT. #	Specs
 	4″ Hole Saw for Trimless Spackle Frame Fixed cut for use with Koto™ Trimless spackle frame (EL4SFR)	EL4500	Cuts 4 ⅛″ through hole and 7 ⅝″ counterbore for spackle frame.

Adjustable Hole Cutter

	Description	CAT. #	Specs
	Adjustable Hole Saw	EL5000	1 ¼″ to 6 ½″
		EL5500	1 9⁄16″ to 7 ⅞″
		EL6000	2″ to 8 ¼″
	Drill	EL5001	
	Upright Axle	EL5002	
	Traverse Axle for EL5000	EL5003	
	Blade A	EL5004A	
	Blade B	EL5004B	
	Adjusting Rod	EL5007	
	Protection Cowl	EL5013	
	Compression Spring	EL5016	
	Set of Balance Bars	EL5018	
	Allen Wrench	EL5019	
	Traverse Axle for EL6000	EL6003	
	Protection Cowl for EL6000	EL6013	
	Set of Balance Bars for EL6000	EL6018	


Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs

Emergency Battery Backups

	Description	CAT. #	Specs
	Emergency Battery Backup (Double Whip - 90 Min. of Emergency Light) 11 ⅛″ L - 2 ⅝″ W - 1 ⅝″ H	KEM-LD1	8W, Up to 750 lm EM output
		KEM-LD2	15W, Up to 1100 lm EM output
	Emergency Battery Backup (90 Min. of Emergency Light) 17 ½″ L - 2 ¼″ W - 1 ⅝″ H	KEM-LD5	25W, 120/277V, 50/60 Hz. Compatible with EL390, EL490, EL492, EL560, EL570, EL760, EL770 Series
	Emergency Battery Backup (90 Min. of Emergency Light) 13 ¾″ L - 2″ W - 1″ H	KEM-LD6	25W Max., 100/277V AC, 50/60 Hz. Compatible to all 3″-8″ Elm Fixtures (ERT3, ERT4, ERT6, & ERT8), Canless Koto System & Koto MAX System
	Emergency Battery Backup (90 Min. of Emergency Light)	KEM-LD7	15W, 120V, 50/60 Hz. Compatible with EL386, EL485, EL770, EL570 Series, Ply Sylo™, and 4" Koto Sylo™ Systems
	Emergency Battery Backup (90 Min. of Emergency Light) 15 ½″ L - 2 ⅛″ W - 1 ⅝″ H	KEM-ERT	25W, 100/277V AC, 50/60 Hz. Compatible to all 3″-8″ Elm Fixtures (ERT3, ERT4, ERT6, & ERT8) & Canless Koto System

Accessories for Emergency Battery Backups

	Description	CAT. #	Specs
	Test Switch for KEM-LD1/2/3	T-SWITCH-LD1	for KEM-LD1 and KEM-LD2
	Test Switch for KEM-LD5	T-SWITCH-LD5	for KEM-LD5
	Standard Test Switch for KEM-LD6	T-SWITCH-LD6	for KEM-LD6
	Flat Test Switch for KEM-LD6	T-SWITCH-LD6-F	for KEM-LD6

ELCO Marketing Products

ELCO LED Ceiling Displays

Hanging Oak™ & Teak™ System Display

DISP-F12LD
Flat Hanging Panel
DISP-D12LD
Box Hanging Panel



Hanging 2″ & 3″Alder™ System Insert Display

(Inserts order separately)

DISP-F2LD2
Flat Hanging Panel
DISP-D2LD2
Box Hanging Panel



Hanging 4″ LED Cans Display

(Inserts order separately)

DISP-F4LD4
Flat Hanging Panel
DISP-D4LD4
Box Hanging Panel



Hanging 6″ LED Cans Display

(Inserts order separately)


DISP-F6LD3
Flat Hanging Panel
DISP-D6LD3
Box Hanging Panel



Hanging 4″ Cedar™ System Display


(Inserts order separately)

DISP-F4LD5
Flat Hanging Panel
DISP-D4LD5
Box Hanging Panel

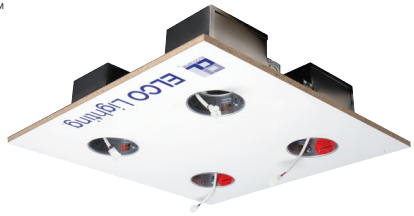

Hanging Elm™ System Display

DISP-F4LD1
Flat Hanging Panel
DISP-D4LD1
Box Hanging Panel

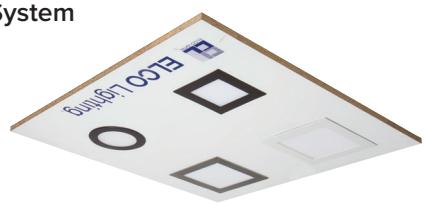

Hanging Undercabinet Bar Display

DISP-FULD1
Flat Hanging Panel
DISP-DULD1
Box Hanging Panel



Hanging Track Fixtures Display

(Fixtures order separately)

DISP-FT
Flat Hanging Panel
DISP-DT
Box Hanging Panel



Hanging Undercabinet Puck Display

DISP-F2LD1
Flat Hanging Panel



Hanging Recessed Box Display

(Trims not included)

DISP-F6
Flat 6″ Line Voltage Housing
DISP-D6
Box Hanging Panel
DISP-F5
Flat 5″ Line Voltage Housing
DISP-D5
Box Hanging Panel



ELCO Marketing Products

ELCO LED Ceiling Displays

Hanging Flush Mount Fixture Display

DISP-FDLD1
Flat Dropping Panel



Hanging Flush Mount Display

DISP-FDLD2
Flat Dropping Panel



Hanging 4" Line Voltage Display

DISP-F4
Flat Display for T-BAR ceiling
DISP-D4
Box Hanging Display



Hanging 3" Low Voltage Display

(Trims order separately)

DISP-F3
Flat Display
DISP-D3
Box Hanging Display



Hanging Halogen Display

DISP-F2
Flat Display for T-BAR ceiling
DISP-D2
Box Hanging Display



Hanging CFL Display

DISP-F7
Flat Display for CFL Lamps
DISP-D7
Box Display for CFL Lamps
DISP-F6CF
6" CFL Drop-in Flat Display
DISP-F5CF
5" CFL Drop-in Flat Display



ELCO Countertop Mats



ELMAT001
LED Inserts & Housings




ELMAT002
LED Undercabinet & Tape Lights



ELMAT003
LED Track Lighting



ELMAT004
Koto™/Oak™/Teak™ System



ELMAT007
Koto™ Standard System

ELCO Marketing Products

ELCO Ready Made Travel Cases



Ambio™

Includes: 1-EUDM31, 1-EUDM32, 1-EUDM33, 1-EUDM34, 1-EUDM35, 1-EUDM36, 1-EUDM37

ELTRV1051



Koto™

Includes: 1-ELK09SD, 1-ELK0735, 1-ELK4118W, 1-ELK3629BB

ELTRV1060-A



Oak™

Includes: 1-E1L02F, 1-E1L12F, 1-E1L32F, 1-E1L22F, 1-E1LDRV60, 1-E1LF1

ELTRV1055



Teak™

Includes: 1-E2LF2, 1-E2L11RICD, 1-E2L14F30B, 1-F2L13F30W, 1-E2L18F327BZ

ELTRV1059-A



Koto™ Master

Includes: 4-Koto LED Modules, 5-Accessories, 10-Twist-On Trims, 1-Trimless Reflector, 1-Flush Mount Trim Adaptor, 4-Koto Sylo Fixtures, 1-Plug-In Dimmer

ELTRV1060-MSTR



Architectural Oak™

Includes: 1 - E1AK02FSDW, 1- E1AK12F35H, 1- E1AK22F27B, 1- E1AK32F30W, 1 - E1LA08RIC, 1- E1LF1

ELTRV1069



Koto™ Mini

Includes: 1 - EMN1030, 1 - EMN1RD18W, 1 - EMN1RD29W, 25°, 35°, and 45° Lens, 1 - L60, 1 - L61

ELTRV1074-X



Koto™ Max

Includes: 1 -ECKT35, 1 - E3CKT,1 - EKCL4163W, 1- EKCL2863W, 1 - EKCL3663BB, 1 - EP732C, 1 - EP734C

ELTRV1071

ELCO Countertop Displays



DISP-KOTO
Koto™ System



DISP-TEAK
Teak™ System



DISP-OAK
Oak™ System



DISP-TAPE
LED Tape Lights

ELCO Catalogs



Order your Catalog today! - Email us at: **orderdesk@elcolighting.com**

Index

CH26 ..... 79, 144, 296
CLIP200 295
CLIP-C 296
CLIP-R 296
DIMTP2 ..... 263, 291
DIMTP3 ..... 263, 291
DIMU1 260
DISP-D2 ..... 304, 305
DISP-D2LD2 304
DISP-D3 305
DISP-D4 ..... 304, 305
DISP-D4LD1 304
DISP-D4LD4 304
DISP-D4LD5 304
DISP-D5 304
DISP-D6 304
DISP-D6LD3 304
DISP-D7 305
DISP-D12LD 304
DISP-DT 304
DISP-DULD1 304
DISP-F2 ..... 304, 305
DISP-F2LD1 304
DISP-F2LD2 304
DISP-F3 305
DISP-F4 ..... 304, 305
DISP-F4LD1 304
DISP-F4LD4 304
DISP-F4LD5 304
DISP-F5 ..... 304, 305
DISP-F5CF 305
DISP-F6 ..... 304, 305
DISP-F6CF 305
DISP-F6LD3 304
DISP-F7 305
DISP-F12LD 304
DISP-FDLD1 305
DISP-FDLD2 305
DISP-FT 304
DISP-FULD1 304
DISP-KOTO 306
DISP-OAK 306
DISP-TAPE 306
DISP-TEAK 306
DRV12V12W 262
DRV24V30W 261
DRV30W 291
DRV60W-10 291
DRV96W-10 291
DRV100W 291
DRVE24V60W 230, 263, 291
DRVU12V24WD 263
DRVU12V60WD 263
DRVU12V100WD 263
DRVU24V24WD 230, 263, 291
DRVU24V60WD 230, 263, 291
DRVU24V100WD 230, 263, 291
DRVU24V200WD 230, 263, 291
DRVU24V300WD 230, 263, 291
E1AK02F27 104
E1AK02F30 104
E1AK02F35 104
E1AK02F40 104
E1AK02FSD 104, 306
E1AK12F27 104
E1AK12F30 104
E1AK12F35 ..... 104, 306
E1AK12F40 104
E1AK12FSD 104
E1AK22F27 ..... 104, 306
E1AK22F30 104
E1AK32F27 104
E1AK32F30 ..... 104, 306
E1AK61F27 104
E1AK61F30 104
E1AK61F35 104
E1AK61F40 104
E1AK61FSD 104
E1ATB08AJIC 105
E1ATB08AJICDX 105
E1ATB08IC 105
E1ATB08ICDX 105
E1DWN08AJIC 105
E1DWN08AJICDX 105
E1DWN08IC 105
E1DWN08ICDX 105
E1L02F27 102
E1L02F30 102
E1L02F35 102
E1L02F40 102
E1L02FSD 102
E1L12F27 102
E1L12F30 102
E1L12F35 102
E1L12F40 102
E1L12FSD 102
E1L22F27 102
E1L22F30 102
E1L22F40 102
E1L32F27 102
E1L32F30 102
E1L32F35 102
E1L32F40 102
E1L61F27 102
E1L61F30 102
E1L61F35 102
E1L61F40 102
E1L61FSD 102
E1LDRV60 ..... 101, 103, 306
E1LF1 ..... 103, 105, 228, 229, 230, 306
E1LF1ICAJ 103
E1LF1ICAJ-7 103
E1LF1ICAJDX 103
E1LF1ICAJDX-7 103
E1LF1-M2 ..... 103, 105
E1LF1-M3 ..... 103, 105
E1LF1-M4 ..... 103, 105
E1LF1-M5 ..... 103, 105
E1LF2 ..... 103, 105
E1LF2ICAJ 103
E1LF2ICAJ-7 103
E1LF2ICAJDX 103
E1LF2ICAJDX-7 103
E1LF2-M2 ..... 103, 105
E1LF2-M3 ..... 103, 105
E1LF2-M4 ..... 103, 105
E1LF2-M5 ..... 103, 105
E1RLA08IC 105
E1RLA08ICDX 105
E1TRL08AJIC 105
E1TRL08AJICDX 105
E1TRL08IC 105
E1TRL08ICDX 105
E2AJU12ICA 120
E2CKT 79
E2KCL10IC 66
E2KCL10ICDX 66
E2KCL10ICDX-EM1 66
E2KCL10ICDX-EM2 66
E2KCL10IC-EM1 66
E2KCL10IC-EM2 66
E2KM1AICDXA 91
E2KM2BICDXA 91
E2KM3CICDXA 91
E2KMT 98
E2L08ICA 107
E2L08ICAD 107
E2L08ICAD-EM1 107
E2L08ICAD-EM2 107
E2L08ICA-EM1 107
E2L08ICA-EM2 107
E2L08RIC 107
E2L08RICD 107
E2L08RICD-EM1 107
E2L08RICD-EM2 107
E2L08RIC-EM1 107
E2L08RIC-EM2 107
E2L10F27 108
E2L10F30 108
E2L10F35 108
E2L10F40 108
E2L10FSD 108
E2L11ICA 107
E2L11ICAD 107
E2L11ICAD-EM1 107
E2L11ICAD-EM2 107
E2L11ICA-EM1 107
E2L11ICA-EM2 107
E2L11RIC 107, 306
E2L11RICD 107, 306
E2L11RICD-EM1 107
E2L11RICD-EM2 107
E2L11RIC-EM1 107
E2L11RIC-EM2 107
E2L13F27 108
E2L13F30 108
E2L13F35 108
E2L13F40 108
E2L13FSD 108
E2L14F27 108
E2L14F30 ..... 108, 306
E2L14F35 108
E2L14F40 108
E2L14FSD 108
E2L15F27 108
E2L15F30 108
E2L15F35 108
E2L15F40 108
E2L15FSD 108
E2L18F27 108
E2L18F30 108
E2L18F35 108
E2L18F40 108
E2L19F27 108
E2L19F30 108
E2L97F27 109
E2L97F30 109
E2LAJ08ICA 107
E2LAJ08ICAD 107
E2LAJ08ICAD-EM1 107
E2LAJ08ICAD-EM2 107
E2LAJ08ICA-EM1 107
E2LAJ08ICA-EM2 107
E2LAJ11ICA 107
E2LAJ11ICAD 107
E2LAJ11ICAD-EM1 107
E2LAJ11ICAD-EM2 107
E2LAJ11ICA-EM1 107
E2LAJ11ICA-EM2 107
E2LC106 119
E2LC106ICA 119
E2LC175ICA 119
E2LC175RICA 119
E2LC185ICA 120
E2LC185RICA 120
E2LCU86ICA 120
E2LCU86RICA 120
E2LF1 ..... 105, 110, 136
E2LF1-M2 110
E2LF1-M3 110
E2LF1-M4 110
E2LF1-M5 110
E2LF2 ..... 103, 105, 110, 306
E2LF2-M2 105
E2LF2-M3 105
E2LF2-M4 105
E2LF2-M5 105
E2LK34ICA 34
E2LK41ICA 34
E2LK42ICAD 34
E2LK94ICA 34
E2LK95ICAD 34
E2LKF1 67
E2LRC106 119
E2MCK10IC 95
E2MCK10ICDX 95
E2MCK102BIC 95
E2MCK102BICDX 95
E2MCK103CIC 95
E2MCK103CICDX 95
E3CKT 79, 306
E3FH08ICA2 148
E3FH08ICAD2 148
E3FH08ICASD 148
E3KCL10IC 66
E3KCL10ICDX 66
E3KCL10ICDX-EM1 66
E3KCL10ICDX-EM2 66
E3KCL10IC-EM1 66
E3KCL10IC-EM2 66
E3LC08ICA2 148
E3LC08ICAD2 148
E3LC08ICASD 148
E3LC10-2 148
E3LC10D2 148
E3LC10ICA2 148
E3LC10ICAD2 148
E3LC10ICASD 148
E3LC10SD 148
E3LK53ICA 34
E3LK54ICAD 34
E3LK65ICA 34
E3LK65ICA-EM1 34
E3LK65RICA 34
E3LK66ICAD 34
E3LK66ICAD-EM1 34
E3LK66RICAD 34
E3LK76ICA 34
E3LK77ICAD 34
E3LK84ICA 34
E3LK85ICAD 34
E3LKF1 67
E3LRC08ICA2 148
E3LRC08ICAD2 148
E3LRC08ICASD 148
E3LRC10-2 148
E3LRC10D2 148
E3LRC10SD 148
E4AJ08ICAD2 150
E4AJ12ICAD2 150
E4CKT 79
E4FH08ICA2 150
E4FH08ICAD2 150
E4FH08ICASD 150
E4KCL10IC 66
E4KCL10ICDX 66
E4KCL10ICDX-EM1 66
E4KCL10ICDX-EM2 66
E4KCL10IC-EM1 66
E4KCL10IC-EM2 66
E4LC08ICA2 150
E4LC08ICAD2 150
E4LC08ICASD 150
E4LC12-2 150
E4LC12D2 150
E4LC12ICA2 150
E4LC12ICAD2 150
E4LC12ICASD 150
E4LC12SD 150
E4LC16-2 150
E4LC16D2 150
E4LC16ICA2 150
E4LC16ICAD2 150
E4LC16ICASD 150
E4LC16SD 150
E4LF 67, 136, 159
E4LF1 ..... 67, 136
E4LFU08D2 159
E4LFU12D2 159
E4LFU16D2 159
E4LFU20D2 159
E4LFU30D2 159
E4LH 159
E4LHU08D2 159
E4LHU12D2 159
E4LHU16D2 159
E4LHU20D2 159
E4LHU30D2 159
E4LK47ICA 34
E4LK48ICAD 34
E4LK78ICA 34
E4LK79ICAD 34
E4LK87ICA 34
E4LK87ICA-EM1 34
E4LK87RICA 34
E4LK88ICAD 34
E4LK88ICAD-EM1 34
E4LK88RICAD 34
E4LK98ICA 34
E4LK99ICAD 34
E4LR 150, 159
E4LRC08ICA2 150
E4LRC08ICAD2 150
E4LRC08ICASD 150
E4LRC12-2 150
E4LRC12D2 150

Index

E4LRC12SD....150
E4LRU08D2....159
E4LRU12D2....159
E4LRU16D2....159
E4LRU20D2....159
E4LRU30D2....159
E4LT....159
E4LTU08D2....159
E4LTU12D2....159
E4LTU16D2....159
E4LTU20D2....159
E4LTU30D2....159
E4SQLF....160
E4SQLFU08D2....160
E4SQLFU12D2....160
E4SQLFU16D2....160
E4SQLFU20D2....160
E4SQLFU30D2....160
E4SQLFU40D2....160
E4SQLH....160
E4SQLHU08D2....160
E4SQLHU12D2....160
E4SQLHU16D2....160
E4SQLHU20D2....160
E4SQLHU30D2....160
E4SQLHU40D2....160
E4TL08ICA2....152
E4TL08ICAD2....152
E4TL08ICASD....152
E4TL12ICA2....152
E4TL12ICAD2....152
E4TL12ICASD....152
E4TL16ICA2....152
E4TL16ICAD2....152
E4TL16ICASD....152
E6CKT....79
E6FH08ICA2....153
E6FH08ICAD2....153
E6FH08ICASD....153
E6FH12ICA2....153
E6FH12ICAD2....153
E6FH12ICASD....153
E6KCL10IC....66
E6KCL10ICDX....66
E6KCL10ICDX-EM1....66
E6KCL10ICDX-EM2....66
E6KCL10IC-EM1....66
E6KCL10IC-EM2....66
E6LC08ICA2....153
E6LC08ICAD2....153
E6LC08ICASD....153
E6LC12ICA2....153
E6LC12ICAD2....153
E6LC12ICASD....153
E6LC16-2....154
E6LC16D2....154
E6LC16ICA2....153
E6LC16ICAD2....153
E6LC16ICASD....153
E6LC16SD....154
E6LC20D2....154
E6LC20ICA2....153
E6LC20ICAD2....153
E6LC20ICASD....153
E6LC20SD....154
E6LF....67, 136, 161
E6LF1....67, 136
E6LFU08D2....161
E6LFU12D2....161
E6LFU16D2....161
E6LFU20D2....161
E6LFU30D2....161
E6LFU40D2....161
E6LFU60D2....161
E6LH....161
E6LHU08D2....161
E6LHU12D2....161
E6LHU16D2....161
E6LHU20D2....161
E6LHU30D2....161
E6LHU40D2....161
E6LHU60D2....161
E6LK37ICA....34
E6LK37ICA-EM1....34
E6LK38ICAD....34
E6LK38ICAD-EM1....34
E6LK43ICA....34
E6LK44ICAD....34
E6LK56ICA....34
E6LK57ICAD....34
E6LR....153, 154, 161
E6LRC08ICA2....153
E6LRC08ICAD2....153
E6LRC08ICASD....153
E6LRC12ICA2....153
E6LRC12ICAD2....153
E6LRC12ICASD....153
E6LRC16-2....154
E6LRC16D2....154
E6LRC16SD....154
E6LRC20-2....154
E6LRC20D2....154
E6LRC20SD....154
E6LRU08D2....161
E6LRU12D2....161
E6LRU16D2....161
E6LRU20D2....161
E6LRU30D2....161
E6LRU40D2....161
E6LRU60D2....161
E6LT....161
E6LTU08D2....161
E6LTU12D2....161
E6LTU16D2....161
E6LTU20D2....161
E6LTU30D2....161
E6LTU40D2....161
E6LTU60D2....161
E8LF....136, 163
E8LF1....136
E8LFU08D2....163
E8LFU12D2....163
E8LFU16D2....163
E8LFU20D2....163
E8LFU30D2....163
E8LFU40D2....163
E8LFU60D2....163
E8LH....163
E8LR....163
E8LRU08D2....163
E8LRU12D2....163
E8LRU16D2....163
E8LRU20D2....163
E8LRU30D2....163
E8LRU40D2....163
E8LRU60D2....163
E8LT....163
E8LTU08D2....163
E8LTU12D2....163
E8LTU16D2....163
E8LTU20D2....163
E8LTU30D2....163
E8LTU40D2....163
E8LTU60D2....163
E09-2427-100....284
E09-2430-100....284
E9LH....165
E9LT....165
E9LTU08D2....165
E9LTU12D2....165
E9LTU16D2....165
E9LTU20D2....165
E9LTU30D2....165
E9LTU40D2....165
E9LTU60D2....165
E10AU....256
E10FR....256
E11MA....256
E12AU....256
E20....256
E21....119, 120, 256
E22-2427-16....284
E22-2427-100....284
E22-2427-CC....284
E22-2430-16....284
E22-2430-100....284
E22-2430-CC....284
E22-2440-16....284
E22-2440-100....284
E22-2440-CC....284
E22AU....256
E24V39FICA....45
E24V48FICA....45
E24V75FICAS....45
E24V76FICA....45
E24V250ICA....44
E24V276ICA....44
E24V362ICA....44
E24V386ICA....44
E24V390ICA....44
E24V390RICA....44
E24V453ICA....44
E24V485ICA....44
E24V490AJICA....44
E24V490ICA....44
E24V490RICA....44
E24V760ICA....44
E24V760RICA....44
E24V770ICA....44
E24V770RICA....44
E24VJB276ICA....45
E24VJB386ICA....45
E24VJB483ICA....45
E25A....209
E25BE....271, 272
E25D....228
E25F....79, 98, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 301
E25GD....274, 275
E25M....203, 204, 205, 206
E25NY....211
E25P....220, 221, 222, 223, 224, 225, 226, 227
E25T....207, 208
E30CB-2427....287
E30CB-2430....287
E30CB-2440....287
E31-2427-100....284
E31-2430-100....284
E36-24SD....286
E36-24SD-16....286
E36A....209
E36D....228, 229
E36F....79, 98, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 301
E36M....203, 204, 205, 206
E36NY....211
E36P....220, 221, 222, 223, 224, 225, 226, 227
E36T....207, 208
E42-2427-100....284
E42-2430-100....284
E42-2435-100....284
E42A....210
E42F....79, 98, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 301
E42P....220, 221, 222, 223, 224, 225, 226, 227
E44-24M-16....288
E44-24M-100....288
E44-24M-CC....288
E44CB-2427....287
E44CB-2430....287
E44CB-2440....287
E45-2427-16....285
E45-2427-100....285
E45-2427-CC....285
E45-2430-16....285
E45-2430-100....285
E45-2430-CC....285
E45-2440-16....285
E45-2440-100....285
E45-2440-CC....285
E50-2427-16....285
E50-2427-100....285
E50-2427-CC....285
E50-2430-16....285
E50-2430-100....285
E50-2430-CC....285
E50-2440-16....285
E50-2440-100....285
E50-2440-CC....285
E60-2427-16....285
E60-2427-100....285
E60-2427-CC....285
E60-2430-16....285
E60-2430-100....285
E60-2430-CC....285
E60-2440-16....285
E60-2440-100....285
E60-2440-CC....285
E80-2427-16....285
E80-2427-100....285
E80-2427-CC....285
E80-2430-16....285
E80-2430-100....285
E80-2430-CC....285
E80-2440-16....285
E80-2440-100....285
E80-2440-CC....285
E210C18SD....120
E210C0627....119
E210C0630....119
E210C0727....119
E210C0730....119
E210C0735....119
E210C0740....119
E210C1827....120
E210C1830....120
E210C1835....120
E210C1840....120
E213C18SD....120
E213C0627....119
E213C0630....119
E213C0727....119
E213C0730....119
E213C0735....119
E213C0740....119
E213C1827....120
E213C1830....120
E213C1835....120
E213C1840....120
E214C18SD....120
E214C0627....119
E214C0630....119
E214C0727....119
E214C0730....119
E214C0735....119
E214C0740....119
E214C1827....120
E214C1830....120
E214C1835....120
E214C1840....120
E215C18SD....120
E215C0627W....119
E215C0630....119
E215C0727....119
E215C0730....119
E215C0735....119
E215C0740....119
E215C1827....120
E215C1830....120
E215C1835....120
E215C1840....120
E218C18SD....120
E218C0627W....119
E218C0630....119
E218C0727....119
E218C0730....119
E218C0735....119
E218C0740....119
E218C1827....120
E218C1830....120
E218C1835....120
E218C1840....120
E219C18SD....120
E219C0627....119
E219C0630....119
E219C0727....119
E219C0730....119
E219C0735....119
E219C0740....119
E219C1827....120
E219C1830....120
E219C1835....120
E219C1840....120

Index

E246LF1....136
E261....262
E261-27....262
E261-35....262
E310C....149
E314C....149
E315C....149
E320C....149
E329C....149
E363-27....262
E366....262
E366-27....262
E366-35....262
E400....172
E410....151, 156, 159
E410C....151
E410R....156
E411....151, 156, 159
E411C....151
E411R....156
E412....151, 156, 159
E412C....151
E412R....156
E414C....151
E414R....156
E415C....151
E415R....156
E417C....151
E417R....156
E418C....151
E418R....156
E420C....151
E420R....156
E424C....151
E424R....156
E428C....151
E428R....156
E429C....151
E429F....79, 98, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 301
E429P....220, 221, 222, 223, 224, 225, 226, 227
E430C....152
E434C....152
E440....160
E442....160
E444C....152
E450....172
E460-24CW....289
E460-24WW....289
E492P....224
E610....155, 157, 162
E610C....155
E610R....157
E611....162
E612....155, 157, 162
E612C....155
E612R....157
E614C....155
E614R....157
E616C....155
E616R....157
E617C....155
E617R....157
E618....162
E629F....79, 98, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 301
E629P....220, 221, 222, 223, 224, 225, 226, 227
E648F....79, 98, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 301
E648P....220, 221, 222, 223, 224, 225, 226, 227
E810....164
E811....164
E812....164
E818....164
E910....165
E1460-24CW....289
E1460-24WW....289
E1499LDRICEA....171
E1499LDRICEAS....171
E2699LDRICEA....167
EBA12E....297
EBA21E....297
EC002....252
EC004....252
EC006....252
EC008....252
EC801....252
EC802....252
EC803....252
EC804....252
EC805....252
EC806....252
EC808....252
EC809....252
EC817....252
EC840....252
EC841....252
EC880....252
ECKT35....79, 98, 306
ECKT3530D....79, 98
ECKTRM....79, 98
ECLB....256
ECLN....256
ECLW....256
ECN6....292
ECN12....288
ECN14-1....288
ECN14-2....288
ECNE10....139
ECNE11....139
ECT....256
EDF11WW-90....293
EDF12WW-90....293
EDF21WW-30....293
EDGLIT1RG....265
EDGLIT2RG....265
EDGREC1RG....265
EDGREC2G....265
EDGREC2RG....265
EDL60N-AU....255
EDL60N-FR....255
EDL61N-FR....255
EDL61N-MA....255
EDL62N-AU....255
EDL80CT3....255
EDL81CT3....255
EDL82CT3....255
EDL83CT3....255
EDU2....292
EDU2-150....292
EDU2LEDCW150....292
EDU2LEDCW-CC....292
EDU2LEDWW150....292
EDU2LEDWW-CC....292
EE22L....265
EE80L....265
EE80S....265
EE81S....265
EE86HRG....265
EE91L....265
EE91LW....265
EE94HG....265
EE94HRG....265
EELE1....265
EELE1B....265
EELEDBRG....265
EELEDRG....265
EEP9A....265
EEPS60....265
EEPS65....265
EEWG11....265
EEWG22....265
EF26-24CW-16....286
EF26-24CW-CC....286
EF26-24WW-16....286
EF26-24WW-CC....286
EFL30S40WFT....268
EFL35M40FL....268
EFL35M40WF....268
EFL35M50FL....268
EFL35M50WF....268
EFL45M40WF....268
EFL45M50FL....268
EFL45M50WF....268
EFL70L40WF....268
EFL70L50WF....268
EFLLSF....268
EFLLTB....268
EFLLWG....268
EFLMKW....268
EFLMWG....268
EFPC61....293
EFPC62....293
EFPEN1....293
EFPEN2....293
EFPGL....293
EFPS21....293
EFPS22....293
EGK25HGS....276
EGKSTK1....276
EJB4CNC....113, 124
EJB4ICA....11, 113, 124, 300
EJB4ICA-EM5....11, 113, 300
EJB4ICDXA....23, 113
EJB4ICDXA-EM5....113
EJB4RICA....11, 113, 124, 300
EJB4RICA-EM5....11, 113, 300
EJB4RICDXA....23, 113
EJB4RICDXA-EM5....113
EJB44ICA....132, 236
EJB475ICA....113, 124
EJB475ICA-EM5....113
EJB475ICDXA....113
EJB475ICDXA-EM5....113
EJB483ICA....11, 115, 124, 300
EJB483ICA-EM5....115
EJB483ICDXA....23, 115, 141
EJB483ICDXA-EM5....115
EKCL10R2BIC....95
EKCL10R2BICDX....95
EKCL10R3CIC....95
EKCL10R3CICDX....95
EKCL10RIC....67, 95
EKCL10RICDX....67, 95
EKCL21HCD....66, 95
EKCL21SDD....66, 95
EKCL2124D....66, 95
EKCL2127D....66, 95
EKCL2130D....66, 95
EKCL2135D....66, 95
EKCL2140D....66, 95
EKCL2863....306
EKCL3663....306
EKCL4111....72, 84, 87
EKCL4112....72, 84, 87
EKCL4116....71, 74, 84, 87
EKCL4118....71, 74, 84, 87
EKCL4122....72, 84
EKCL4125....72, 84, 87
EKCL4127....72, 74, 84, 87
EKCL4129....72, 74, 84, 87
EKCL4130....72, 84
EKCL4153....72
EKCL4163....72, 86, 306
EKCL4172....73
EKCL4179....73
EKCL4183....72, 86
EKCL4188....73
EKCL4193....73
EKCL4212....73, 87
EKCL4216....73, 74, 87
EKCL4218....73, 74, 87
EKCL4222....74
EKCL4227....73, 74, 87
EKCL4229....73, 74, 87
EKCL4282....74
EKCL4284....74
EKCL4347....76
EKCL4357....76
EKCL4710....74, 75, 87
EKCL4713....74, 75, 87
EKCL4714....75
EKCL4715....74, 87
EKCL4716....75
EKCL4717....75
EKCL4721....75
EKCL4741....75, 86
EKCL4759....75, 86
EKCL6418....76, 88
EKCL6427....76, 88
EKCL6429....76, 88
EKCL6829....76, 88
EKCM2SFA1....93, 96
EKCM2SFB2....93, 96
EKCM2SFC3....93, 96
EKCM218A1....93, 96, 99
EKCM218B2....93, 96, 99
EKCM218C3....93, 96, 99
EKCM230A1....93, 96
EKCM230B2....93, 96
EKCM230C3....93, 96
EL01SFR....102, 104
EL2SFR....12, 24, 35, 46, 62, 68
EL3FMR....14, 37, 48, 70, 83
EL3FMS....14, 37, 48, 70, 83
EL3SFR....26, 48, 62, 83
EL03SFS....26, 48, 63
EL3WCARD....26, 48, 83
EL3WCR....26, 48, 83
EL4FMR....17, 29, 40, 51, 59, 74, 87
EL4FMS....17, 29, 40, 51, 59, 74, 87
EL4SFR....30, 41, 52, 74, 87, 301, 302
EL4SFS....30, 41, 52, 74, 87
EL4WCARD....30, 52, 87
EL5FICA....133, 184, 300
EL5ICA....184
EL5ICANB....184
EL5RICA....184
EL7FICA....133, 186, 300
EL7IC100A....186
EL7ICA....186
EL7ICA-G24....186
EL7ICANB....186
EL7LV....177
EL7LVICA....177
EL7RICA....186
EL7RLV....177
EL8SQ....131, 191
EL8SQICA....131, 191
EL10....191
EL11....191
EL12....131, 187, 191, 198
EL13....187, 198
EL16....187
EL17....187
EL18....187
EL30....187
EL39A....167
EL39FICA....11, 122, 133, 300
EL39FICA-GU10....133, 300
EL39FICDXA....23
EL39ICA....167
EL39LDICA....167
EL39LDICA-7....167
EL39LDRICA....167
EL39RA....167
EL48FICA....11, 124, 133, 300
EL48FICDXA....23, 141
EL49A....171
EL49FICA-GU10....133, 300
EL49ICA....171
EL49LDICA....171
EL49LDICA-7....171
EL49LDICAS....171
EL49LDRICA....171
EL49RA....171
EL55ICA....184
EL55RICA....184
EL56FICA....11, 128, 133, 300
EL75FICAS....11, 116, 128, 133, 300
EL75FICAS-EM5....116
EL75FICDXAS....23, 116, 142
EL75FICDXAS-EM5....116
EL76FICA....11, 116, 128, 133, 157, 300
EL76FICA-7....128, 157
EL76FICA-EM5....116
EL76FICDXA....23, 116, 142
EL76FICDXA-EM5....116
EL99A....179
EL99AJICA....179
EL99FICA....133, 179, 300
EL99ICA....179
EL99ICA-G24....179

Index

EL99LDICA 179
EL99RA 179
EL99RICA 179
EL99RICA-G24 179
EL140CT5 132
EL141CT5 132
EL250ICA 10
EL250ICDXA 22
EL257 178
EL276ICA 10
EL276ICDXA 22
EL276JBICA 11, 300
EL276JBICDXA 23
EL308 187
EL317 ..... 122, 187
EL318 187
EL331CT5 123
EL332CT5 123
EL362ICA 10, 122
EL362ICDXA 22
EL376 188
EL377 188
EL386ICA 10
EL386ICDXA 22
EL386JBICA 11, 122, 300
EL386JBICDXA 23
EL390ICA 10, 122, 167
EL390ICA-7 ..... 122, 167
EL390ICA-EM5 ..... 10, 122
EL390ICDXA 22
EL390ICDXA-EM5 22
EL390RICA 10, 122, 167
EL390RICDXA 22
EL410CT5 125
EL410SDW 125
EL412CT5 125
EL414CT5 126
EL415CT5 125
EL415SDBZ 124
EL415SDW 124
EL416CT5 126
EL416HLCT5 126
EL417CT5 125
EL417CT5H 125
EL423CT5 193
EL427CT5 125
EL427CT5W 125
EL431CT5 126
EL434CT5 126
EL439CT5 126
EL442CT5 127
EL446CT5 126
EL446HLCT5 126
EL453ICA 10
EL453ICDXA 22
EL455CT5 124
EL456CT5 126
EL460CT5 126
EL470ICA 19, 193
EL470RICA 19, 193
EL475CT5 ..... 125, 141
EL476 188
EL477 188
EL485ICA 10
EL485ICDXA 22
EL487CT5 ..... 126, 141
EL490AJICA 11, 113, 123
EL490AJICA-EM5 113
EL490AJICA-EM7 11
EL490AJICDXA 22, 113
EL490AJICDXA-EM5 113
EL490ICA 10, 112, 123, 156, 171
EL490ICA-7 ..... 123, 156, 171
EL490ICA-EM5 ..... 10, 112, 123, 171
EL490ICDXA 22, 112, 141
EL490ICDXA-EM5 ..... 22, 112, 141
EL490RICA 10, 112, 123, 156, 171
EL490RICA-EM5 112
EL490RICDXA 22, 112, 141
EL490RICDXA-EM5 112
EL492FICAS 11, 124, 133, 300
EL492ICA 10, 112, 123
EL492ICA-7 123
EL492ICA-EM5 112
EL492ICDXA 112
EL492ICDXA-EM5 112
EL492RICA 10, 113, 123
EL492RICA-EM5 113
EL492RICDXA 113
EL492RICDXA-EM5 113
EL497CT5 127
EL497SD 127
EL511 ..... 184, 195
EL511CT5 195
EL512 ..... 184, 195
EL512CT5 195
EL516 185
EL517 185
EL518ICA 197
EL518RICA 197
EL530 185
EL550 ..... 197, 302
EL552CT5 130
EL555 197
EL560 ..... 10, 128, 133, 197, 303
EL560ICA 10, 128
EL560RICA 10, 128
EL561 197
EL570ICA 10, 128
EL570ICA-7 128
EL570ICA-EM5 10
EL570RICA 10, 128
EL590ICA 195
EL590RICA 195
EL597CT5 131
EL601 ..... 198, 302
EL602 200
EL603 200
EL604 200
EL606 200
EL607 200
EL608 200
EL610CT5 130
EL610SD 129
EL611CT5 130
EL612CT5 130
EL613CT5 130
EL614 198
EL615 ..... 128, 129, 198
EL615CT5 128
EL615SD 129
EL616 ..... 130, 198
EL616CT5 130
EL617 ..... 129, 199
EL617CT5 129
EL621CT5 130
EL622 ..... 198, 199
EL622K 199
EL623 199
EL624 199
EL625CT5 129
EL626 199
EL627CT5 129
EL637CT5 129
EL655CT5 128
EL661CT5 130
EL662CT5 130
EL670CT5 130
EL685CT5 ..... 129, 142
EL685CT5D 129, 142
EL697CT5 131
EL713CT5 195
EL714CT5 195
EL715CT5 195
EL716C 190, 195
EL716CT5 195
EL760ICA 10, 116, 128, 177
EL760ICA-7 ..... 128, 177
EL760ICA-EM5 ..... 10, 116
EL760ICDXA 22, 116, 128, 142
EL760ICDXA-EM5 ..... 116, 142
EL760RICA 10, 116, 128, 177
EL760RICA-EM5 116
EL760RICDXA 22, 116, 142
EL760RICDXA-EM5 116
EL761CT5 196
EL762CT5 196
EL763CT5 196
EL764CT5 196
EL770ICA 10, 116, 128, 157, 177
EL770ICA-7 ..... 128, 157, 177
EL770ICA-EM5 ..... 10, 116, 128
EL770ICDXA 22, 116, 128, 142
EL770ICDXA-EM5 ..... 116, 142
EL770RICA 10, 116, 128, 157, 177
EL770RICA-7 157
EL770RICA-EM5 116
EL770RICDXA 22, 116, 142
EL770RICDXA-EM5 116
EL881CT5 ..... 131, 191
EL901 ..... 179, 199, 200
EL901HT 200
EL901ICA 199
EL901RICA 199
EL901RT 200
EL902 179
EL911 ..... 179, 182
EL912 179
EL913 180
EL915 180
EL916 180
EL918ICA 198
EL918RICA 198
EL925 180
EL930 180
EL936ICA 198
EL946ICA 199
EL970ICA 195
EL970RICA 195
EL971ICA 196
EL971RICA 196
EL985 180
EL988 180
EL990 180
EL991 181
EL992 181
EL993 181
EL993K 181
EL994 181
EL994D 181
EL994W 181
EL995 181
EL998 181
EL999 ..... 181, 182
EL999K 181
EL1212CT5 ..... 131, 191
EL1411 173
EL1412 173
EL1415 173
EL1416 173
EL1419 173
EL1420 173
EL1421 173
EL1422 173
EL1423 173
EL1429 174
EL1430 174
EL1444 174
EL1445 174
EL1452R 174
EL1453BL 174
EL1488 174
EL1491 175
EL1493 174
EL1495 175
EL1497 175
EL1499A 172
EL1499AJICEA 172
EL1499EA 172
EL1499ES 172
EL1499ICA 172
EL1499ICEA 172
EL1499LDICA 171
EL1499LDICAS 171
EL1499LDICEA 171
EL1499LDICEAS 171
EL1499LDRICA 171
EL1499LDRICAS 171
EL1499RA 172
EL1499REA 172
EL1499RES 172
EL1499RS 172
EL1499S 172
EL1510 178
EL1516 178
EL1530 178
EL1550 178
EL1579 178
EL1597 178
EL2321 169
EL2322 170
EL2382 170
EL2384 170
EL2388 170
EL2393 170
EL2395 170
EL2411 175
EL2412 175
EL2415 175
EL2416 175
EL2420 175
EL2421 175
EL2440 176
EL2443 176
EL2445 176
EL2452 176
EL2452R 176
EL2453 176
EL2453BL 176
EL2482 176
EL2484 176
EL2488 176
EL2493 176
EL2494 176
EL2495 176
EL2497 176
EL2510 177
EL2516 177
EL2530 177
EL2550 178
EL2597 178
EL2612W 168
EL2613W 168
EL2619BB 168
EL2619WB 168
EL2619WC 168
EL2619WW 168
EL2620B 168
EL2620W 168
EL2621B 168
EL2621BB 168
EL2621BZ 168
EL2621C 168
EL2621CC 168
EL2621H 168
EL2621W 168
EL2622B 168
EL2622W 168
EL2633 169
EL2633B 169
EL2633W 169
EL2644 169
EL2644B 169
EL2644C 169
EL2644G 169
EL2644W 169
EL2652BL 169
EL2688 169
EL2693 169
EL2695 169
EL2698W 169
EL2699A 168
EL2699EA 168
EL2699ICA 168
EL2699ICEA 168
EL2699LDICA 167
EL2699LDICEA 167
EL2699LDRICA 167
EL2699RA 168
EL2699REA 168
EL2912 182
EL2915 182
EL2982 183
EL2983 183
EL2984 183
EL2985 183

Index

EL2993....182
EL2994....183
EL2999....183
EL4500....301, 302
EL5000....301, 302
EL5001....302
EL5002....302
EL5003....302
EL5004A....302
EL5004B....302
EL5007....302
EL5013....302
EL5016....302
EL5018....302
EL5019....302
EL5500....301, 302
EL6000....301, 302
EL6003....302
EL6013....302
EL6018....302
EL9111....182
EL9112....182
EL9113....182
EL9115....182
EL9116....182
EL41027....125
EL41030....125
EL41035....125
EL41040....125
EL41427DXW....141
EL41430DXW....141
EL41435DX....141
EL41527....125
EL41530....125
EL41535....125
EL41540....125
EL41550....125
EL41727C....125
EL41735H....125
EL41740....125
EL41740C....125
EL41740H....125
EL44727DX....141
EL44730DX....141
EL49530....141
EL49727DX....141
EL49730DX....141
EL61027....130
EL61030....130
EL61140....130
EL61527....128
EL61530....128
EL61535....128
EL61540....128
EL61550....128
EL61740....129
EL62527....129
EL62535....129
EL62540....129
EL62727....129
EL69727DX....142
EL69727DXW....142
EL69730DX....142
ELA101....188
ELB4EH....144
ELB4EH-EM5....144
ELB4PF....144
ELB4PF-EM5....144
ELB6EH....144
ELB6EH-EM5....144
ELB6PF....144
ELB6PF-EM5....144
ELB8PF....144
ELB8PF-EM5....144
ELB15RCT5ICA....146
ELB30RCT5....146
ELB44SQEH....144
ELB44SQEH-EM5....144
ELB44SQPF....144
ELB44SQPF-EM5....144
ELB50RCT5....146
ELB410....146
ELB440....146
ELB610....146
ELB629....146
ELB810....146
ELBRMD....145
ELBRMD-EM5....145
ELBRT....145
ELD14CT5....237
ELD16CT5....237
ELD11030....237
ELD11040....237
ELD21030....237
ELD21040....237
ELD21230....237
ELD21240....237
ELD31430....237
ELD31440....237
ELD32230....237
ELD32240....237
ELD32630....237
ELD32640....237
ELH7T....190
ELIG250B....277
ELIG250BZ....277
ELIG250CP....277
ELIG250N....277
ELIG330....277
ELIG330250....277
ELIG330250B....277
ELIG330250N....277
ELIGRH....277
ELJ4S....236, 299
ELJ332....236
ELJ443....132, 236, 299
ELJ42230W....132
ELK07....9, 92, 193, 194, 306
ELK07SD-FC....9, 92, 194
ELK08....9, 22, 44, 55, 91, 92, 194
ELK08AL41TW....22, 91
ELK08CT5....9, 92, 194
ELK08SD-12....55
ELK09....9, 92, 193, 306
ELK09SD....9, 92, 193, 306
ELK10....9, 22, 91, 92, 194
ELK10CT5....9, 92, 194
ELK10DX27....22, 91
ELK10DX30....22, 91
ELK10DX35....22, 91
ELK10DX40....22, 91
ELK10DXSD....22, 91
ELK11....9, 92, 193
ELK11HC....9, 92, 193
ELK11SD....9, 92, 193
ELK19AMD....33
ELK19SD....33
ELK24....33, 34
ELK72FICA....34
ELK73FICAD....34
ELK93FICA....34
ELK94FICAD....34
ELK215....12, 24, 35, 46, 62, 68
ELK308....26, 48, 62, 83
ELK315....26, 48, 62, 83
ELK0327....9, 92, 193, 194
ELK0327-NSP....9, 92, 194
ELK0330....9, 92, 193, 194
ELK0330-NSP....9, 92, 194
ELK370....26, 48, 63
ELK381....26, 48, 63
ELK408....30, 41, 52, 63, 74, 87
ELK415....16, 30, 41, 50, 52, 63, 74, 87
ELK430....30, 41, 52
ELK434....19, 30, 41, 52, 193, 194
ELK445....30, 41, 52, 63, 74, 87
ELK459....30, 41, 52, 63, 74, 87
ELK0724....9, 92, 193
ELK0727....9, 92, 193, 194
ELK0727-FC....9, 92, 194
ELK0730....9, 92, 193, 194
ELK0730-FC....9, 92, 194
ELK0735....9, 92, 193, 194, 306
ELK0735-FC....9, 92, 194
ELK0740....9, 92, 193, 194
ELK0740-FC....9, 92, 194
ELK0827....9, 44, 55, 92, 194
ELK0827-12....55
ELK0827-24....44
ELK0827-NSP....9, 92, 194
ELK0830....9, 44, 55, 92, 194
ELK0830-12....55
ELK0830-24....44
ELK0830-NSP....9, 92, 194
ELK0924....9, 92, 193
ELK0927....9, 92, 193
ELK0930....9, 92, 193
ELK0935....9, 92, 193
ELK0940....9, 92, 193
ELK1124....9, 92, 193
ELK1127....9, 92, 193
ELK1130....9, 92, 193
ELK1135....9, 92, 193
ELK1140....9, 92, 193
ELK1327....9, 92, 194
ELK1330....9, 92, 194
ELK1335....9, 92, 194
ELK1340....9, 92, 194
ELK1927D....33
ELK1930D....33
ELK1935D....33
ELK1940D....33
ELK2127D....33
ELK2127D-FC....33
ELK2130D....33
ELK2130D-FC....33
ELK2135D....33
ELK2135D-FC....33
ELK2140D....33
ELK2140D-FC....33
ELK2427D....33
ELK2430D....33
ELK2435D....33
ELK2440D....33
ELK2518....12, 24, 46, 62
ELK2527....12, 24, 46, 62
ELK2529....12, 24, 46, 62
ELK2541....12, 24, 46, 62
ELK2588....12, 24, 46, 62
ELK2818....12, 24, 46, 62
ELK2827....12, 24, 46, 62
ELK2829....12, 24, 46, 62
ELK2863....12, 24, 46, 62
ELK2872....12, 24, 46, 62
ELK2883....12, 24, 46, 62
ELK2888....12, 24, 46, 62
ELK3318....13, 47, 56
ELK3322....48, 56
ELK3327....48, 56
ELK3329....13, 47, 56
ELK3341....48, 56
ELK3393....48
ELK3618....13, 47
ELK3620....13, 47
ELK3622....13, 47
ELK3627....13, 47
ELK3629....13, 47, 306
ELK3653....13, 47
ELK3663....13, 47
ELK3672....13, 47
ELK3679....13, 47
ELK3683....13, 47
ELK3693....13, 47, 56
ELK4111....15
ELK4112....15
ELK4116....11, 15, 17, 23, 29, 40, 51, 59
ELK4118....15, 17, 29, 40, 51, 59, 306
ELK4120....15
ELK4122....15
ELK4125....15
ELK4127....11, 15, 17, 23, 29, 40, 51, 59
ELK4129....11, 15, 17, 23, 29, 40, 51, 59
ELK4130....16, 50
ELK4153....16, 50
ELK4163....16, 50
ELK4172....11, 16, 23, 50
ELK4179....16, 50
ELK4183....16, 50
ELK4188....11, 16, 23, 50
ELK4193....16, 50
ELK4212....51
ELK4216....11, 16, 17, 23, 29, 40, 50, 59
ELK4218....16, 17, 29, 40, 50, 59
ELK4220....51
ELK4222....51
ELK4227....11, 17, 23, 29, 40, 51, 59
ELK4229....11, 17, 23, 29, 40, 51, 59
ELK4282....51
ELK4284....51
ELK4293....51
ELK4347....19, 193, 194
ELK4349....19, 193, 194
ELK4357....19, 193, 194
ELK4710....11, 17, 23, 29, 30, 40, 41, 51, 59
ELK4713....11, 17, 23, 29, 30, 40, 41, 51, 59
ELK4714....11, 23, 30, 41
ELK4715....11, 17, 23, 29, 40, 51, 59
ELK4716....11, 23, 30, 41
ELK4717....30, 41
ELK4721....53
ELK4723....53
ELK4741....53
ELK4743....53
ELK4759....53
ELK5421....20, 42
ELK5493....20, 42
ELK6418....20, 31, 42
ELK6427....20, 31, 42
ELK6429....20, 31, 42
ELK6829....20, 31, 42
ELL430....115
ELL4621....114
ELL4623....114
ELL4641....114
ELL4643....114
ELL4810....183
ELL4812....183
ELL4816....183
ELL6810....117, 189
ELL6812....189
ELL6813....117, 189
ELL6815....117, 189
ELM30....188, 189, 296
ELM40....188
ELM42....188
ELM43....188
ELM45....188
ELM48....189
ELM300....189
ELM301....189
ELM302....189
ELM303....189
ELM305....189
ELM501....185
ELM530....185
ELM5045....185
ELMAT001....305
ELMAT002....305
ELMAT003....305
ELMAT004....305
ELMAT007....305
ELP11CT5....112
ELP11CT5DX....112
ELR68530....139
ELRH7T....190
ELS30....189
ELS520....185
ELSP12CT5....236
ELSP22CT5....236
ELSP43CT5....236
ELSP63CT5....236
ELSP66CT5....236
ELSP83CT5....236
ELSP88CT5....236
ELSP4430....236
ELST1....282
ELST10....282
ELST27CT3....279
ELST28CT3....279
ELST29CT3....279
ELST31....278
ELST32....278
ELST37....278
ELST42....282

Index

ELST43 282
ELST64 279
ELST65 279
ELST66 279
ELST74 279
ELST75 279
ELST76 279
ELST81 278
ELST82 278
ELST83 278
ELST84 ..... 278, 280
ELST85 ..... 278, 280
ELST8430 280
ELST8440 280
ELST8530 280
ELST8540 280
ELST8630 280
ELST8640 280
ELST8730 280
ELST8740 280
ELST9130 280
ELST9140 280
ELST9230 281
ELST9240 281
ELST9330 281
ELST9340 281
ELST9430 281
ELST9440 281
ELST9530 280
ELST9540 280
ELST9630 281
ELST9640 281
ELST9730 281
ELST9740 281
ELST9830 281
ELST9840 281
ELST9930W 280
ELTRV1051 306
ELTRV1055 306
ELTRV1059-A 306
ELTRV1060-A 306
ELTRV1060-MSTR 306
ELTRV1069 306
ELTRV1071 306
ELTRV1074-X 306
EMN1RD18 ..... 7, 306
EMN1RD18TL 7
EMN1RD27 7
EMN1RD27TL 7
EMN1RD29 ..... 7, 306
EMN1RD29TL 7
EMN1RDSFR 7
EMN1SQ18 7
EMN1SQ27 7
EMN08SD 6
EMN175AJICA 6
EMN175DH2ICA 6
EMN175ICA 6
EMN175JBICA 6
EMN1027 6
EMN1030 ..... 6, 306
EMP4 136
EMP6 136
EMP8 136
EP002 250
EP004 250
EP006 250
EP008 250
EP12X 250
EP222 253
EP300 253
EP322 253
EP323 253
EP324 253
EP325 253
EP422 253
EP444 253
EP666 242
EP710C 127, 141
EP711C 127
EP712C 127, 141
EP713C 103, 105
EP714C 105
EP715C 103, 105
EP716C 110
EP717C 110
EP718C 110
EP731C 9, 22, 33, 44, 55, 64, 66, 77, 88, 91, 92, 95, 100, 193, 231
EP732C 64, 77, 88, 100, 231, 306
EP733C 64, 77, 88, 100, 231
EP734C 64, 77, 88, 100, 231, 306
EP735C 64, 77, 100
EP736C 64, 77, 100
EP737C 64, 77, 100
EP738C 64, 77, 100
EP739C 9, 22, 33, 44, 64, 77, 88, 91, 92, 95, 100, 193, 231
EP800 253
EP801 250
EP802 250
EP803 250
EP804 250
EP805 250
EP806 250
EP807 254
EP808 250
EP809 250
EP810 250
EP811 253
EP812 ..... 250, 252
EP814 253
EP815 253
EP816 253
EP817 250
EP818 254
EP819 253
EP820 253
EP822 253
EP824 254
EP825 251
EP827 251
EP836 254
EP840 251
EP841 251
EP844 254
EP845 254
EP848 254
EP850 251
EP880 251
EP883 255
EP884 255
EP885 255
EP903 254
EP904 254
EP905 254
EP906 254
EP918 254
EP924 254
EP936 254
EP948 254
EP960 254
EP979 251
EP989 254
EPC2 292
EPCH 292
EPCLED 292
EPD-4 293
EPD4 234
EPD6 234
EPD-7 293
EPD-8 293
EPEN 292
EPIN 292
EPMT 292
EPN2 292
EPN11 289
EPS2 ..... 288, 292
EPS12 289
EPS13 289
EPS26 288
EPS27 288
EPS28 288
EPS29 288
EPSD1 ..... 287, 289
EPSD2 ..... 286, 287
EPSD19 287
EPSD20 287
EPSD21 ..... 286, 287
EPSD21CB8 287
EPSD21CB10 287
EPSD22 ..... 286, 287
EPSD22-120 286
EPSD22CB8 287
EPSD22CB10 287
EPSD23 ..... 286, 287
EPSD23CB8 287
EPSD23CB10 287
EPSD24 287
EPSD25 287
EPSD26 287
EPSD26-60 287
EPSD26-72 287
EPSD27L 287
EPSD27LCB8 287
EPSD27LCB10 287
EPSD28XCB8 287
EPSD28XCB10 287
ERT2HL08CT5 135
ERT2HL10CT5 135
ERT2L06CT5 135
ERT2R 135
ERT4L10CT5 135
ERT22SQ 135
ERT41DXCT5 137
ERT61DXCT5 138
ERT81DXCT5 139
ERT210 ..... 135, 136
ERT210CT5 136
ERT213CT5 136
ERT214 ..... 135, 136
ERT214CT5 136
ERT215CT5 136
ERT218CT5 136
ERT230CT5W 136
ERT311CT5 136
ERT317CT5 136
ERT318CT5 136
ERT411CT5 136
ERT412CT5 136
ERT413CT5 137
ERT413CT5DXW 137
ERT415 ..... 135, 137
ERT415CT5 137
ERT416CT5 137
ERT417FCT5 137
ERT425CT5 137
ERT434CT5 137
ERT441CT5 138
ERT445 135
ERT475CT5 137
ERT487CT5 137
ERT495CT5DXW 137
ERT612CT5 138
ERT613CT5 138
ERT615CT5 138
ERT625CT5 138
ERT627FCT5W 138
ERT661CT 139
ERT685CT5 138
ERT695CT5DXW 138
ERT812CT5 139
ERT44130 138
ERT44140 138
ERT66130 139
ERT66140 139
ESF4 233
ESF6 233
ET68 249
ET226 ..... 243, 295
ET507 244
ET526 244
ET526-75 244
ET528 ..... 244, 245, 295
ET530 244
ET531 244
ET532 ..... 244, 295
ET537 244
ET549 245
ET559 245
ET562 245
ET578L30 239
ET579L30 241
ET579CT5 240
ET612D 239
ET613-35D 239
ET613D 239
ET615CT5D 239
ET616-27D 239
ET616CT5D 239
ET617CT5D 239
ET618CT5D 241
ET620CT3D 241
ET620CT5D 241
ET621CT5D 241
ET630 ..... 247, 253
ET631 ..... 247, 253
ET634 247
ET635 ..... 247, 253
ET636 247
ET637 ..... 247, 253
ET639 253
ET641 248
ET642 248
ET647 248
ET650 ..... 248, 253
ET657 248
ET658 248
ET660 249
ET662 249
ET686 249
ET690 249
ET696 249
ET814CT5 241
ET815CT5 241
ET830CT5 240
ET831CT5 240
ET832CT5 240
ET833CT5 240
ET843CT5 239
ET1528 245
ET1626 246
ET1628 246
ET1630 246
ET1632 246
ET1728 246
ET62530D 240
ET62630D 240
ET62830D 241
ET75830D 240
ET758CT5 240
ETL21CT3 242
ETL21CT5 242
ETL2130 242
ETL2140 242
ETLD526 243
ETLD528 243
ETLD530 243
ETLD534 243
ETR12 ..... 103, 293
ETR12-20 ..... 103, 293
ETR-277 293
ETRK20 293
ETRK50 293
ETRK60E 293
ETT 256
ETVB 256
ETVN 256
ETVW 256
ETW42CT5 242
ETW42CT5B-J 242
ETW43CT5 242
ETW44CT5 242
ETW46CT3 242
ETW663CT5 242
EU3T08W 258
EU3T12W 258
EU3T16W 258
EU3T24W 258
EU3TC6 258
EU3TPC 258
EUB11CT5 258
EUB11L30 258
EUB11L40 258
EUB12CT5 258
EUB12L30 258


Index

EUB14L30 258
EUB14L40 258
EUB18CT5 258
EUB18L30 258
EUB22CT5 258
EUB22L40 258
EUB29CT5 258
EUB29L40 258
EUB32CT5 258
EUB36CT5 258
EUB36L30 258
EUB36L40 258
EUB48CT5 258
EUB48L30 258
EUB48L40 258
EUBC03 258
EUBC06 258
EUBC12 258
EUBC24 258
EUBCRD 258
EUBJBX 258
EUBJBXBZ 258
EUCRD 297
EUD31 290
EUD31-8 290
EUD32 ..... 260, 290
EUD32-8 290
EUD32CT5W 260
EUD33 ..... 260, 290
EUD33-8 290
EUD34 ..... 260, 290
EUD34-8 290
EUD34CT5W 260
EUD35 ..... 260, 290
EUD35-8 290
EUD35CT5W 260
EUD36 ..... 260, 290
EUD36-8 290
EUD36CT5W 260
EUD37 ..... 260, 290
EUD37-8 290
EUD38 290
EUD38-8 290
EUDC3 260
EUDC31 260
EUDC51 261
EUDCCT 261
EUDCRD 260
EUDCS31 260
EUDJBX 260
EUDMS1 261
EUDPC 261
EUDPH1 261
EUDRV18 260
EUDRV72 260
EUDS1 261
EUL12-3 297
EUL21-3 297
EUL24-3 297
EUL32-3 297
EUL42-3 297
EUM21W 260
EUM22W 260
EUM41BZ 259
EUM41DX 142, 259
EUM41DXBZ 259
EUM41DXW 142, 259
EUM41W 259
EUM42BZ 259
EUM42DX 142, 259
EUM42DXBZ 259
EUM42DXW 142, 259
EUM42W 259
EUM43BZ 259
EUM43DX 142, 259
EUM43DXBZ 259
EUM43DXW 142, 259
EUM43W 259
EUM44BZ 259
EUM44DX 142, 259
EUM44DXBZ 259
EUM44DXW 142, 259
EUM44W 259
EUM45BZ 259
EUM45DX 142, 259
EUM45DXBZ 259
EUM45DXW 142, 259
EUM45W 259
EUMC24 260
EUMC36 260
EUMCS1 260
EUMS1 260
EUN51W 261
EUN52W 261
EUN53W 261
EUS41W 261
EUS45W 261
EUS47W 261
EUSC6 261
EUSC12 261
EUSC24 261
EUSC36 261
EUSPC 261
EW44-2427-16 288
EW44-2427-CC 288
EW44-2430-16 288
EW44-2430-CC 288
EW44-2440-16 288
EW44-2440-CC 288
EW45-2427-16 288
EW45-2427-CC 288
EW45-2430-16 288
EW45-2430-CC 288
EW45-2440-16 288
EW45-2440-CC 288
EWM25W30 267
EWP90M40 267
EWP90M50 267
EWPPHBU 268
EWPPHSU 268
FB27 ..... 79, 144, 296
FIRECVR 89, 132, 300
FIREENCL 89, 132, 300
FIREENCL-S 89, 132, 300
FIRETAPE 89, 132, 300
HB24 296
JBOXCV 296
JC-25 298
JC-50 298
JC-50-12V 298
KEM-ERT 67, 89, 133, 139, 303
KEM-LD1 ..... 133, 303
KEM-LD2 ..... 133, 303
KEM-LD3 133
KEM-LD4 133
KEM-LD5 ..... 133, 303
KEM-LD6 ..... 133, 303
KEM-LD7 303
KEM-LDJB1 236
L4 ..... 9, 10, 11, 17, 19, 22, 23, 29, 30, 33, 40, 41, 44, 51, 52, 55, 59, 64, 66, 71, 72, 73, 74, 75, 76, 77, 84, 86, 87, 88, 89, 91, 92, 95, 100, 112, 113, 114, 115, 123, 124, 125, 126, 127, 133, 141, 156, 171, 183, 187, 188, 193, 231, 258, 268, 295, 297, 300, 302, 303, 306
L28 ..... 295, 306
L38 .... 10, 11, 22, 23, 122, 295, 300, 303
L39 ..... 10, 11, 22, 23, 122, 133, 167, 295, 300, 303
L40 ..... 187, 258, 268, 295
L41 22, 71, 72, 73, 74, 84, 86, 87, 91, 124, 125, 126, 141, 295, 306
L42 ..... 73, 74, 87, 125, 193, 295, 297
L44 ..... 126, 127, 141, 295
L45 ..... 9, 10, 22, 33, 44, 55, 64, 66, 77, 88, 92, 95, 100, 124, 126, 193, 231, 268, 302
L46 9, 33, 44, 55, 64, 66, 77, 89, 92, 95, 100, 114, 126, 193, 231
L47 ..... 9, 19, 33, 44, 55, 64, 66, 74, 75, 77, 86, 87, 89, 92, 95, 100, 125, 141, 188, 193, 231
L49 ..... 9, 10, 11, 22, 33, 44, 64, 66, 77, 89, 92, 95, 100, 112, 113, 123, 124, 127, 133, 141, 156, 171, 193, 231, 300, 303
L50 ..... 44, 64, 77, 89, 92, 95, 100, 231, 268, 302
L50B 64, 77, 89, 100, 231
L50W 64, 77, 89, 100, 231, 268
L51 ..... 9, 44, 64, 66, 77, 89, 92, 95, 100, 184, 185, 193, 195, 197, 231
L52 ..... 64, 77, 89, 92, 100, 231
L53 ..... 64, 77, 89, 92, 100, 185, 231
L54 ..... 9, 44, 55, 64, 66, 77, 89, 92, 95, 100, 193, 231
L55 ..... 9, 44, 55, 64, 66, 77, 89, 92, 95, 100, 130, 184, 193, 197, 231, 302
L57 ..... 9, 10, 64, 66, 77, 88, 92, 95, 100, 128, 133, 193, 231, 303
L60 ..... 6, 105, 162, 165, 198, 200, 255, 302, 306
L61 .. 6, 102, 103, 105, 128, 129, 130, 198, 199, 255, 306
L62 ..... 6, 129, 130, 198, 199, 255
L441CT5 127
L-BRCKT 296
L-BRCKT4 296
L-BRCKT5 296
LET-60 ..... 103, 230, 293
LET-60-277 ..... 103, 230, 293
LET-60DX 103, 230, 293
LET-60DX-27 ..... 103, 230, 293
LET-60DX-277 ..... 103, 293
LET-60H 103, 230, 293
LET-75 ..... 230, 293
MR16LD 297
MR120-GU10 ..... 246, 297
MR120-GU10LD 246, 297
OM4B 298
OM4W 298
OM5B 298
OM5W 298
OVM7B 298
OVM7BZ 298
OVM7W 298
OVP7B 298
OVP7W 298
P006S 296
P010S 296
P010T 296
P011S 296
P012S 296
P016S 296
P024S 296
P113E1 299
P126E1 299
P142EU 299
PR2 109
PR22 109
PSA21 295
PSA25 295
PSA27 295
PSA29 295
PSA30 ..... 117, 195, 295
PSA31 ..... 117, 295
PSA32 295
PSA33 295
PSA34 296
PSA34-27 296
PSA34-35 296
PSA34-40 296
PSA37 ..... 167, 171, 177, 297
PSA37-27 ..... 167, 177, 297
PSA37-35 ..... 167, 177, 297
PSA37-40 ..... 167, 177, 297
PSA38 ..... 64, 77, 100
PSA38-4 ..... 64, 77, 100
PSA38-22 ..... 64, 77, 100
PSA41-40 297
PSE26 ..... 195, 295
PST1 278
PST2L 278
PST4 278
PST5 278
PST80 278
PST84 278
PWH2E1 299
R9H 186
R9ICA 186
R10H 186, 296
RM1 ..... 103, 105
RM1TL 105
RM2 109
RM3B 298
RM3BZ 298
RM3C 298
RM3CP 298
RM3G 298
RM3N 298
RM3W 298
RM4B 298
RM4BZ 298
RM4CP 298
RM4G 298
RM4N 298
RM4W 298
RM5B 298
RM5BZ 298
RM5C 298
RM5G 298
RM5N 298
RM5W 298
RM7B 298
RM7BZ 298
RM7C 298
RM7CP 298
RM7N 298
RM7W 298
RM11 ..... 103, 105
RM22 109
RP-1B 296
RP4SH 298
RP7B 298
RP7W 298
RP8W 299
RP9W 299
RR9H 186
RR9ICA 186
RR10H 186
RTNRTRK1 295
RTNRTRK2 295
SPRING 296
T-SWITCH 133, 303
T-SWITCH-LD1 ..... 133, 303
T-SWITCH-LD5 ..... 133, 303
T-SWITCH-LD6 ..... 133, 303
T-SWITCH-LD6-F 133, 303
V-SPRING 296
WB-18-Z 298

The **Quality** Choice



The **Timely** Choice

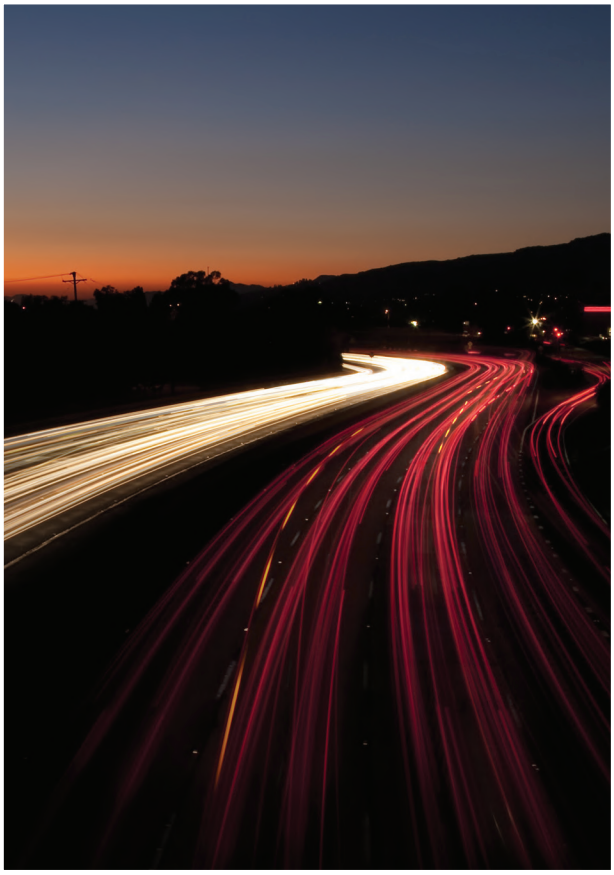







The **Contractor's** Choice

Text or Call 323.383.6399 Email cs@elcolighting.com Visit www.elcolighting.com



The **Leading** Choice



Over three and a half decades ago, in the heart of Los Angeles, ELCO Lighting was founded on the philosophy that high quality lighting products should be sold at a fair market price. Our commitment to this philosophy and dedication to exceptional customer service serve as the very soul of our company. We take pride in our perpetual commitment to such standards that enable us to continually prosper in a highly competitive and unpredictable industry. With our expanding LED product line that entails recessed, track, undercabinet, outdoor and emergency lighting, we are ready to fulfill a variety of lighting demands. Quality engineering, fair market value, professional customer service, and micro-managed inventory are the cornerstones of ELCO Lighting.



ELCO Lighting
Innovation Beyond Expectation

The **Trusted** Choice

ELCAT1065



ELCO Lighting

Corporate Headquarters

2042 E. Vernon Ave.
Vernon, CA 90058
Tel: 323.231.2600
Fax: 323.231.3200
elcolighting.com

Customer Service

Tel: 800.522.2626
Fax: 800.644.2626
orderdesk@elcolighting.com
customerservice@elcolighting.com
sales@elcolighting.com

Printed in the U.S.A.
$20.00

RV. 08/26

© ELCO Lighting. The marks appearing in this catalog are registered trademarks of ELCO Lighting. Other marks used herein are recognized trademarks of their respective companies. Products shown in this brochure may be covered by U.S. and international patents. Specifications subject to change without notice.