ELCO Lighting
Innovation Beyond Expectation


Track, Lamp & Floating Canopy
EP809
Installation Instructions

WARNING:
Risk of electric shock. Before installation, disconnect power to the luminaire. Failure to do so may result in electric shock and lead to injury or death.
Risque de choc électrique. Avant l'installation, débranchez l'alimentation au luminaire. Ne pas le faire peut entraîner un choc électrique et entraîner des blessures, voire la mort.

CAUTION:
For your safety, read and understand instructions completely prior to installation. Installation requires knowledge of luminaires electrical system. If not qualified, DO NOT attempt installation. Contact a qualified electrician if necessary.
Pour votre sécurité, lisez et comprenez entièrement les instructions avant l'installation. L'installation nécessite une connaissance du système électrique des luminaires. Si vous n'êtes pas qualifié, NE PAS tenter l'installation. Contactez un électricien qualifié si nécessaire.

NOTE: Before beginning the installation, carefully unpack and identify all parts. **Save these instructions as you may need them at a later date.**

1. Place track over outlet box and mark position of track mounting holes on ceiling or wall. On wallboard or plaster, drill "5/8" mounting holes.
2. Plain underside of track faces ceiling or wall and slotted side of track faces out to accept lights.
3. Install track to ceiling or wall using toggle bolts (furnished).
4. On wood surfaces use standard #10 wood screws (not furnished).

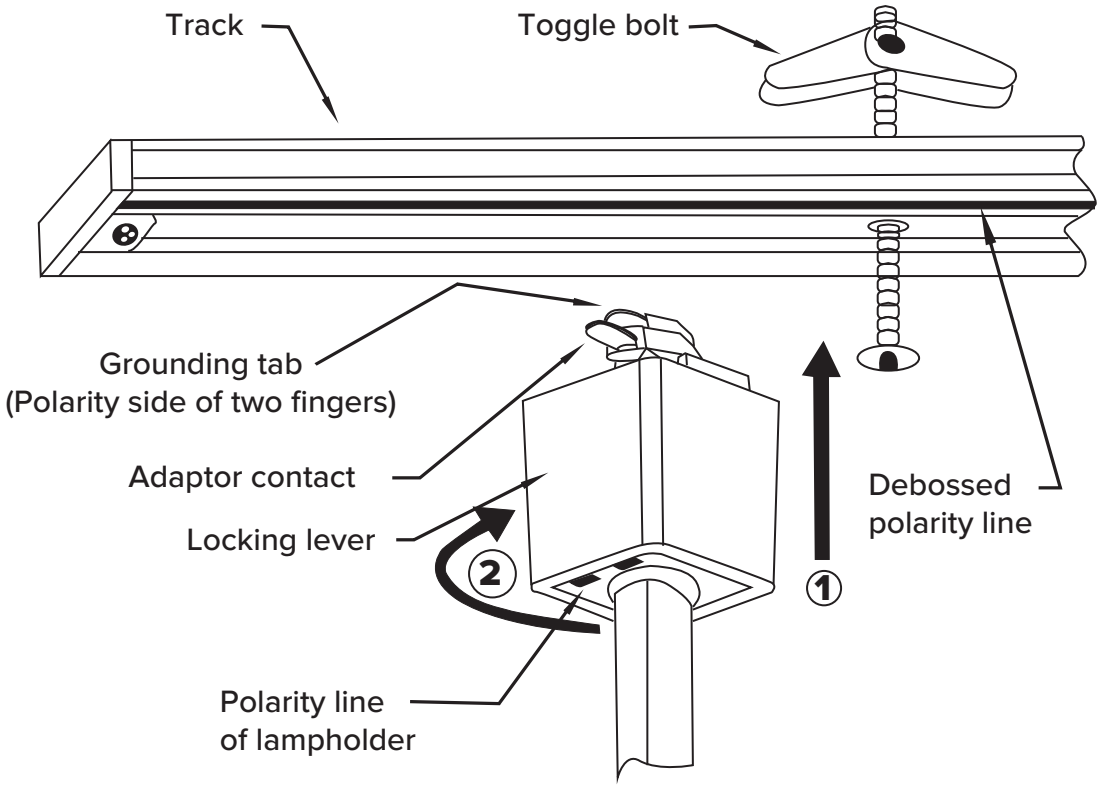

Track Fixture Installation

CAUTION: Turn off switch at main power source before installing any track or fitting.

1. Pull down the locking lever and insert "Adaptor contact" into the slot in the track.
2. Rotate adaptor 1/4 turn 90° to locked position. NOTE: Polarity line of lampholder (Grounding tab, polarity side of two fingers) must point to track debossed polarity line so that the debossed polarity line of the track can be aligned with the polarity line (side) of adaptor.
3. To remove, depress the locking lever and turn 90°

2042 East Vernon Ave. Vernon, CA 90058 • Tel: (323) 231-2600 Fax: (323) 231-3200 □ www.elcolighting.com

ALL RIGHTS RESERVED © ELCO Lighting 2026


WARNING:
Risk of electric shock. Before installation, disconnect power to the luminaire. Failure to do so may result in electric shock and lead to injury or death.
Risque de choc électrique. Avant l'installation, débranchez l'alimentation au luminaire. Ne pas le faire peut entraîner un choc électrique et entraîner des blessures, voire la mort.

CAUTION:
For your safety, read and understand instructions completely prior to installation. Installation requires knowledge of luminaires electrical system. If not qualified, DO NOT attempt installation. Contact a qualified electrician if necessary.
Pour votre sécurité, lisez et comprenez entièrement les instructions avant l'installation. L'installation nécessite une connaissance du système électrique des luminaires. Si vous n'êtes pas qualifié, NE PAS tenter l'installation. Contactez un électricien qualifié si nécessaire.

NOTE: Before beginning the installation, carefully unpack and identify all parts. **Save these instructions as you may need them at a later date.**

CAUTION: Turn off switch at main power source before installing any track or fitting.

1. Fasten mounting strap to outlet box. Connect ground wire.
2. Locate track below outlet box in desire position then:
   a. Rotate ground clip to accept track and push track into clip.
   b. Fasten track to ceiling following instructions supplied with the track section.
   c. Track ends must be terminated with either a dead end or a connector.
3. Insert electrical adaptor into track, rotate 90° to locked position to make electrical contact. NOTE: a) Polarity side of electrical adaptor (The side of grounding tab or marked "N") must point to track debossed polarity line. b) Center line of electrical adaptor must be set on center line of outlet box.
4. Pull positive (Black) wire from outlet box and attach to brass screw terminal marked "P". Pull neutral (White) wire, on opposite of track, and attach to nickled-plated screw terminal marked "N". Push excess wire back into outlet box-wire must hug track side. Install cover and secure with screw.

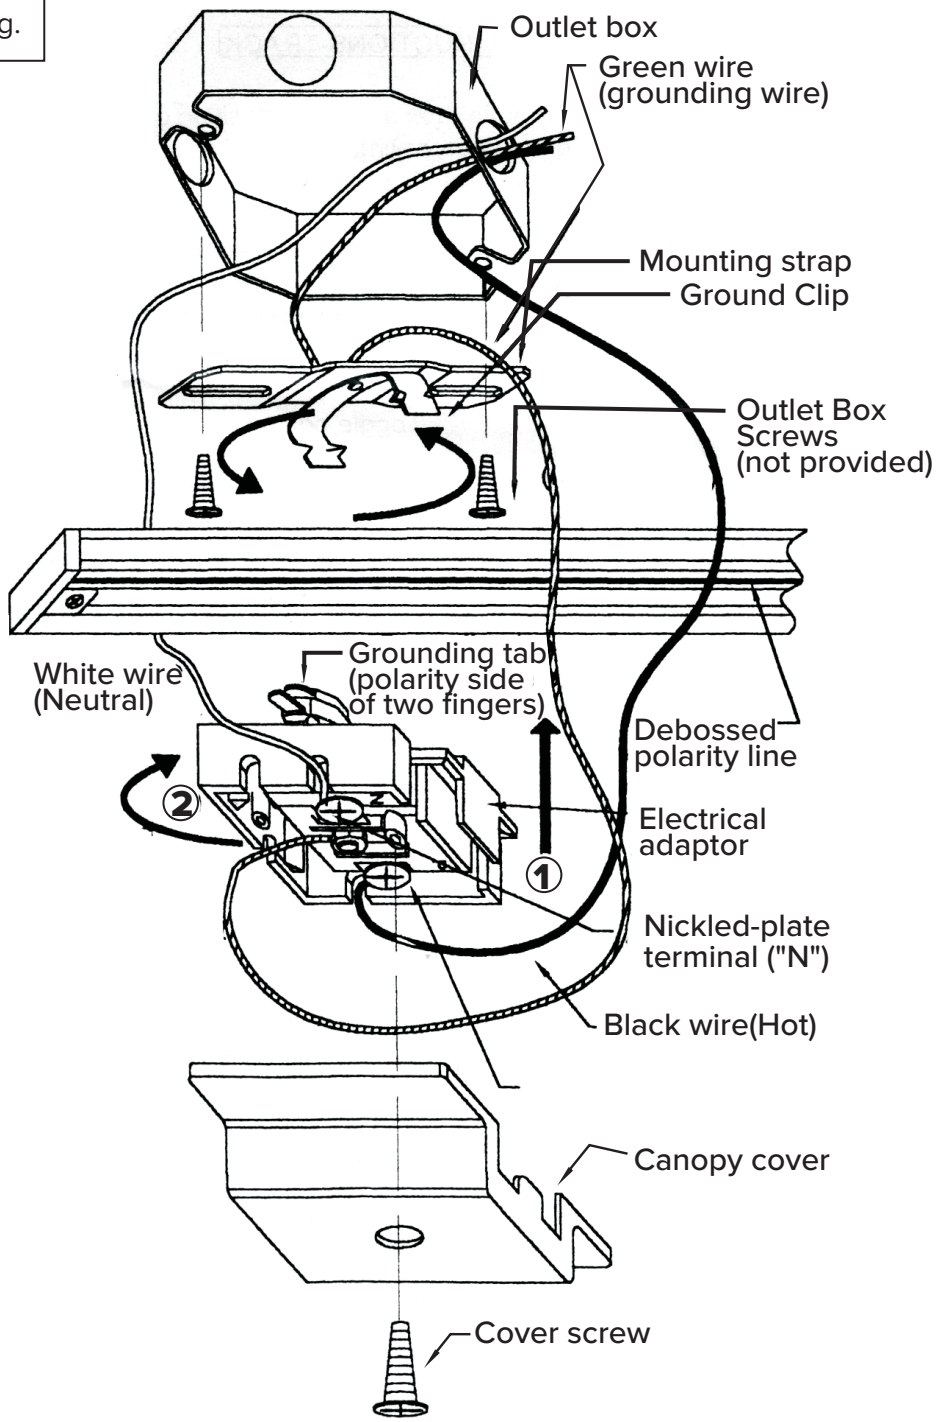

ALL RIGHTS RESERVED © ELCO Lighting 2026